


## EM 2 DRL (907 496)

- To be plugged into an LSA disconnection block via the earthing frame
- Equipotential bonding of unused lines
- Fast replacement for retrofitting a DEHNrapid LSA module



Figure without obligation

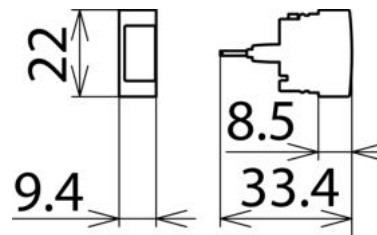

Dimension drawing EM 2 DRL

Plugged into the EF 10 DRL earthing frame, the earthing plug connects a pair placed on an LSA disconnection block to the equipotential bonding. Its function is to directly earth unused lines that are placed on the LSA disconnection block. The earthing plug must not be used in combination with the DRL 10 B... plug-in SPD block.

| Type   | EM 2 DRL          |
|--|-------------------|
| Part No.                                       | 907 496           |
| D1 Total lightning impulse current (10/350 μs) | 5 kA              |
| Operating temperature range (T <sub>U</sub> )  | -40 °C ... +80 °C |
| Plugs into                                     | TL2 10DA ...      |
| Earthing via                                   | EF 10 DRL         |
| Material                                       | zinc die-casting  |
| Approvals                                      | EAC               |
| Weight   | 13 g              |
| Customs tariff number (Comb. Nomenclature EU)  | 85369010          |
| GTIN   | 4013364150683     |
| PU   | 10 pc(s)          |

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.