



IS13252



(By request)

(By request)

(By request)

(Applying)

TPTC004




## ■ Features

- Three-Phase 320 ~ 600Vac wide range input  
(Dual phase operation possible)
- Global certificates in multi-fields(ITE 62368-1, Industrial 61558-1/2-16,61010) & Marine DNV,SEMI47,C1D2 HazLoc approved
- 63mm Ultra slim width
- High efficiency up to 95.5% and no load power dissipation<3.1W by R.C.
- 200% Peak Power capability
- Built-in constant current limiting circuit
- Current sharing up to 1920W(3+1) for parallel use
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Fanless design, cooling by free air convection
- Over voltage category III (OVC III)
- 40~+85°C wide range operation temperature (>+60°C derating)
- Operating altitude up to 5000 meters
- Built-in Remote ON/OFF Control and DC OK relay contact
- Ultra low inrush current < 10A
- Built-in ORing FET
- Tool free terminal block (LA type)
- Conformal coating
- Can be installed on DIN Rail TS-35/7.5 or 15
- 5 years warranty

## ■ Description

The XTR-480 series is a 480W AC/DC 3Ø 320~600Vac input ultra slim industrial high-reliability DIN rail power. Key features of this series include a narrow 63 mm casing, optimizing system installation space, it boasts a maximum efficiency of 95.5% and a low standby power consumption <3.1W by remote control for energy savings and carbon reduction. It provides constant current with up to 200% peak power; fanless design, ultra-wide operating temperature range of -40 to +85°C (up to +60°C at full load); OVCIII compliance; parallel function capability up to 1920W; ultra-low inrush current of <10A; built-in Remote Control ,DC OK and ORing FET; internal PCB coating offers basic moisture and dust protection, and it has multiple terminal blocks for selection. With comprehensive protection functions, complete safety certifications, and a 5-years warranty, the XTR-480 series is a compact, high-performance, and highly reliable DIN rail power supply.

## ■ Model Encoding




Terminal Type Options		Note
Blank	Screw Terminal	In stock
LA	Lever-Actuated	In stock
PI	Push In	In stock


**SPECIFICATION**

MODEL		XTR-480-12□	XTR-480-24□	XTR-480-36□	XTR-480-48□									
□=Blank, LA, PI														
OUTPUT	DC VOLTAGE	12V	24V	36V	48V									
	RATED CURRENT	30A	20A	13.3A	10A									
	CURRENT RANGE	0 ~ 30A	0 ~ 20A	0 ~ 13.3A	0 ~ 10A									
	RATED POWER	360W	480W	478.8W	480W									
	PEAK CURRENT(5 sec.)	60A	64A	26.7A	20A									
	POWER(5 sec.)	720W	960W	961W	960W									
	RIPPLE & NOISE (max.) Note.2	120mVp-p	120mVp-p	150mVp-p	150mVp-p									
	VOLTAGE ADJ. RANGE	12 ~ 15V	24 ~ 29V	36 ~ 42V	48 ~ 55V									
	VOLTAGE TOLERANCE Note.3	±2.0%	±1.0%	±1.0%	±1.0%									
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%									
LOAD REGULATION		±1.0%	±1.0%	±1.0%	±1.0%									
SETUP, RISE TIME		800ms, 60ms/400Vac	600ms, 60ms/500Vac at full load											
HOLD UP TIME (Typ.)		20ms / 400Vac	20ms / 500Vac at full load											
INPUT	VOLTAGE RANGE Note.4	Three-Phase 320 ~ 600Vac (Dual phase operation possible) 450 ~ 800Vdc												
	NO LOAD Remote Power OFF	3.1W/400Vac	3.1W/400Vac	3.1W/400Vac	3.1W/400Vac									
	CONSUMPTION(Typ.) Remote Power ON	5.0W/400Vac	5.0W/400Vac	5.0W/400Vac	5.0W/400Vac									
	FREQUENCY RANGE	47 ~ 63Hz												
	POWER FACTOR (Typ.)	PF ≥ 0.92/400Vac PF ≥ 0.88/500Vac at full load												
	EFFICIENCY (Typ.)	93%	94%	94.5%	95.5%									
	AC CURRENT (Typ.)	0.85A/400Vac	0.7A/500Vac											
PROTECTION	INRUSH CURRENT (Typ.)	COLD START 10A/500Vac												
	LEAKAGE CURRENT	<3.5mA / 530Vac												
	OVERLOAD	105%~200% rated output power for more than 5 sec then constant current limiting without shutdown at rate current when Vo=30%~100% Hiccup mode when Vo<30% rated voltage												
FUNCTION	OVER VOLTAGE	15 ~ 18V	30 ~ 35V	43 ~ 50V	56 ~ 65V									
	OVER TEMPERATURE	Protection type : Shut down o/p voltage, re-power on to recover												
ENVIRONMENT	OVER TEMPERATURE	Shut down o/p voltage or hiccup mode, recovers automatically after temperature goes down												
	PARALLEL	Up to 1920W (3+1), please refer to Function Manual for more details												
	DC OK RELAY CONTACT	Relay Contact Ratings (max.):30Vdc/1A, 30Vac/0.5A resistive load												
	REMOTE CONTROL	Power ON : RC + ~ RC- open or keep 2~5Vdc												
		Power OFF: RC + ~ RC- short or keep<0.5Vdc												
SAFETY & EMC (Note 7)	WORKING TEMP. Note.5	-40 ~ +85°C (Refer to "Derating Curve")												
	WORKING HUMIDITY	20 ~ 95% RH non-condensing												
	STORAGE TEMP., HUMIDITY	-40 ~ +85°C, 10 ~ 95% RH non-condensing												
	TEMP. COEFFICIENT	±0.03%/°C (0 ~ 60°C)												
	VIBRATION	Component:10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes; Mounting: Compliance to IEC60068-2-6												
SAFETY & EMC (Note 7)	SAFETY STANDARDS	UL121201/CSA C22.2 NO.213.17 Class I, Div. 2 Group A, B, C, D Hazardous Locations T4; UL61010; TUV BS EN/EN62368-1, BS EN/EN61558-1/2-16 BS EN/EN61010;CB IEC62368-1,IEC61558-1,IEC61010;RCM AS/NZS 62368-1,AS/NZS 61558-1/2-16; BSMI CNS15598-1;CCC GB4943.1;EAC TPTC004 approved; <b>KC KC62368-1 and BIS IS13252 (Part 1):2010 certified, no stock ,contact sale for inquires</b>												
	OVER VOLTAGE CATEGORY Note.6	IEC/EN 61558-1/-2-16 (OVC III, altitude up to 2000m )												
		IEC/EN/UL 61010 (OVC II, altitude up to 5000m )												
		IEC/EN 62368-1 (OVC II, altitude up to 5000m )												
	SAFETY EXTRA-LOW VOLTAGE (SELV)	IEC/EN 61558-2-16 (SELV ) IEC/EN/UL 61010-2-201 (SELV ) IEC/EN 62368-1 (SELV/ ES1 )												
	WITHSTAND VOLTAGE	I/P-O/P:4.87KVac I/P-FG:2.5KVac O/P-FG:0.5KVac O/P-DC OK:0.5KVac												
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:>100M Ohms / 500VDC / 25°C / 70% RH												
	EMC EMISSION	Parameter	Standard	Test Level / Note										
		Conducted	BS EN/EN55032(CISPR32) / BS EN/EN61204-3 / CNS15936	Class B										
		Radiated	BS EN/EN55032(CISPR32) / BS EN/EN61204-3 / CNS15936	Class B										
		Harmonic Current	BS EN/EN61000-3-2	Class A										
	EMC IMMUNITY	Voltage Flicker	BS EN/EN61000-3-3	-----										
		BS EN/EN55035 , BS EN/EN61204-3												
		Parameter	Standard	Test Level / Note										
		ESD	BS EN/EN61000-4-2	Level 4, 15KV air ; Level 4, 8KV contact										
		Radiated Field	BS EN/EN61000-4-3	Level 3, 10V/m ; criteria A										
		EFT / Burst	BS EN/EN61000-4-4	Level 4, 4KV ; criteria A										
		Surge	BS EN/EN61000-4-5	Level 4, 2KV / Line-Line, Level 4, 4KV / Line-Earth										
		Conducted	BS EN/EN61000-4-6	Level 3, 10V/m ; criteria A										
OTHERS	Magnetic Field	BS EN/EN61000-4-8	Level 4, 30A/m ; criteria A											
	Voltage Dips and Interruptions	BS EN/EN61000-4-11	>95% dip 0.5 periods, 30% dip 25 periods> 95% interruptions 250 periods											
NOTE	MTBF	K hrs min. Telcordia SR-332(Bellcore) ; K hrs min. MIL-HDBK-217F (25°C)												
	DIMENSION	63*125.2*125mm (W*H*D)												
	PACKING	1.3Kg ; 10pcs/14Kg/1.1CUFT												
1. All parameters NOT specially mentioned are measured at 400Vac input, rated load and 25°C of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1 μF & 47 μF parallel capacitor. 3. Tolerance : includes set up tolerance, line regulation and load regulation. 4. Dual phase operation is allowed under certain derating to output load. Please refer to derating curves for details. 5. Installation clearances : 40mm on top, 20mm on the bottom, 5mm on the left and right side are recommended when loaded permanently with full power. In case the adjacent device is a heat source, 15mm clearance is recommended. 6. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft). 7. The power supply is considered as an independent unit, but the final equipment still need to re-confirm that the whole system complies with the EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on <a href="https://www.meanwell.com/Upload/PDF/EMI_statement_en.pdf">https://www.meanwell.com/Upload/PDF/EMI_statement_en.pdf</a> )														
※ Product Liability Disclaimer : For detailed information, please refer to <a href="https://www.meanwell.com/serviceDisclaimer.aspx">https://www.meanwell.com/serviceDisclaimer.aspx</a>														


### Block Diagram

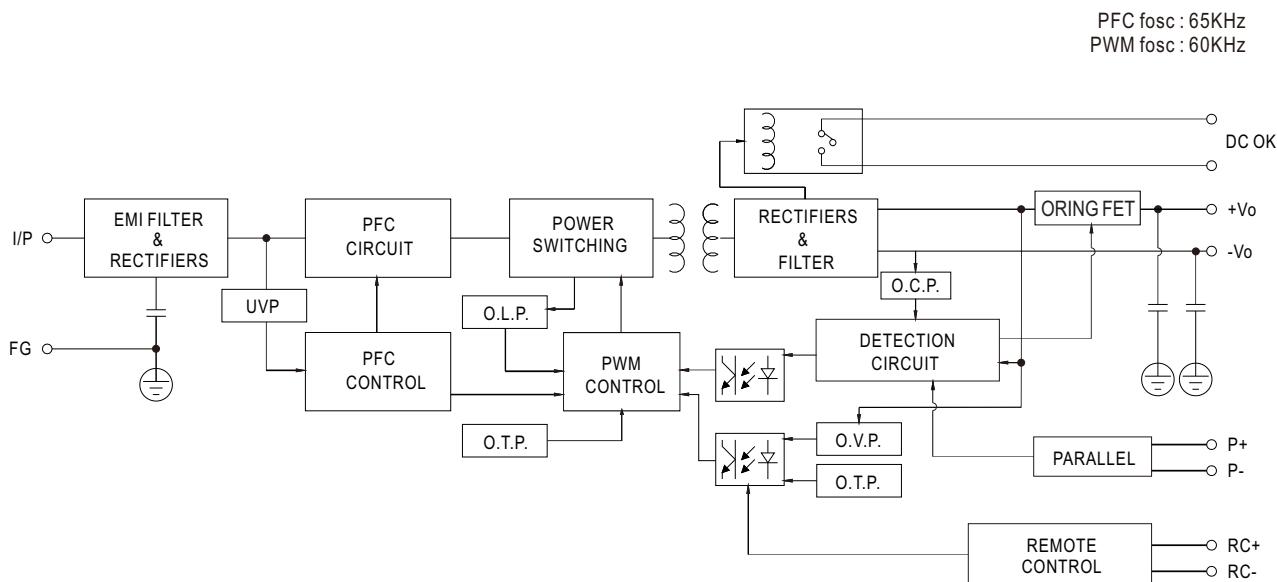

### Derating Curve

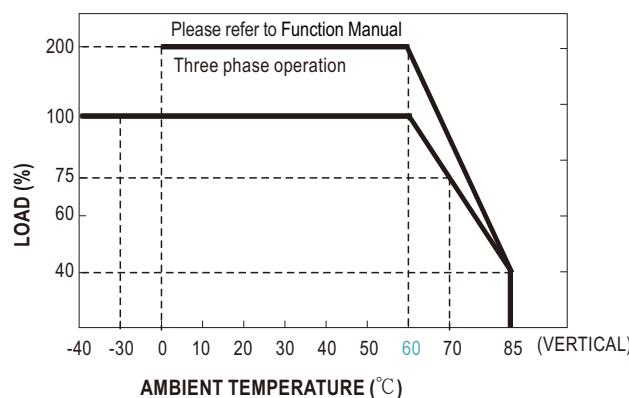

### Output derating VS input voltage

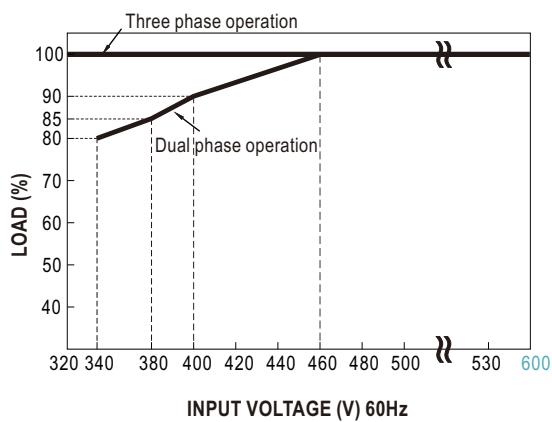


**■ Peak Power**

$$P_{av} = \frac{P_{pk} \times t + P_{npk} \times (T-t)}{T} \leq P_{rated}$$

$$\text{Duty} = \frac{t}{T} \times 100\% \leq 35\%$$

$t \leq 5 \text{ sec}$

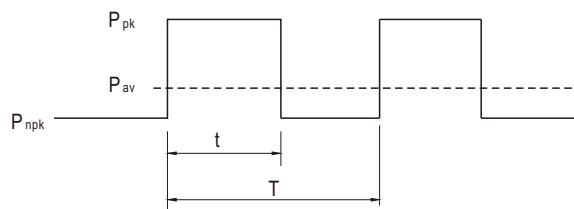

$P_{av}$ : Average output power (W)

$P_{pk}$  : Peak output power (W)


$P_{npk}$  : Non-peak output power (W)

$P_{rated}$  : Rated output power (W)

$t$  : Peak power width (sec)

$T$  : Period (sec)

—— 3Ø 320 ~ 600Vac

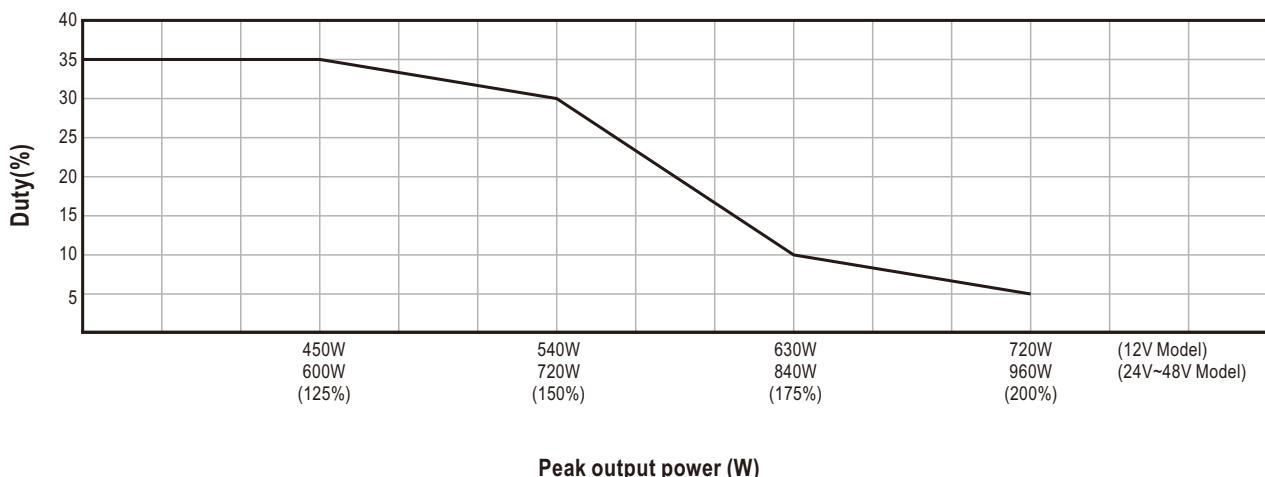
**Peak output power (W)**
**For example (24V model) :**

$$V_{in} = 400V \quad \text{Duty\_max} = 5\%$$

$$P_{av} = P_{rated} = 480W$$

$$P_{pk} = 960W$$

$t \leq 5 \text{ sec}$


$$T \geq \frac{5 \text{ sec}}{5\%} \geq 100 \text{ sec}$$

$$P_{npk} \leq \frac{TP_{av} - tP_{pk}}{T-t}$$

$$P_{npk} \leq 454.7W$$

## ■ Function Manual

Pin No.	Function	Description
1,2	DC OK Relay Contact	Contact close : PSU turns ON/DC_OK ; Contact open : PSU turns OFF/DC_fail; Contact ratings (max.): 30Vdc/1A ,30Vac/0.5A resistive load.
3	P+	Current sharing signal. When units are connected in parallel, the P+ pins of the units should be connected mutually to allow current balance between units.
4	P-	Current sharing signal. When units are connected in parallel, the P- pins of the units should be connected mutually to allow current balance between units. P- Signal is internally connected to -Vo.
5	RC+	Turns the output ON and OFF by electrical singal Remote power ON : Open or keep 2~5Vdc
6	RC-	Remote power OFF: Short or keep<0.5Vdc

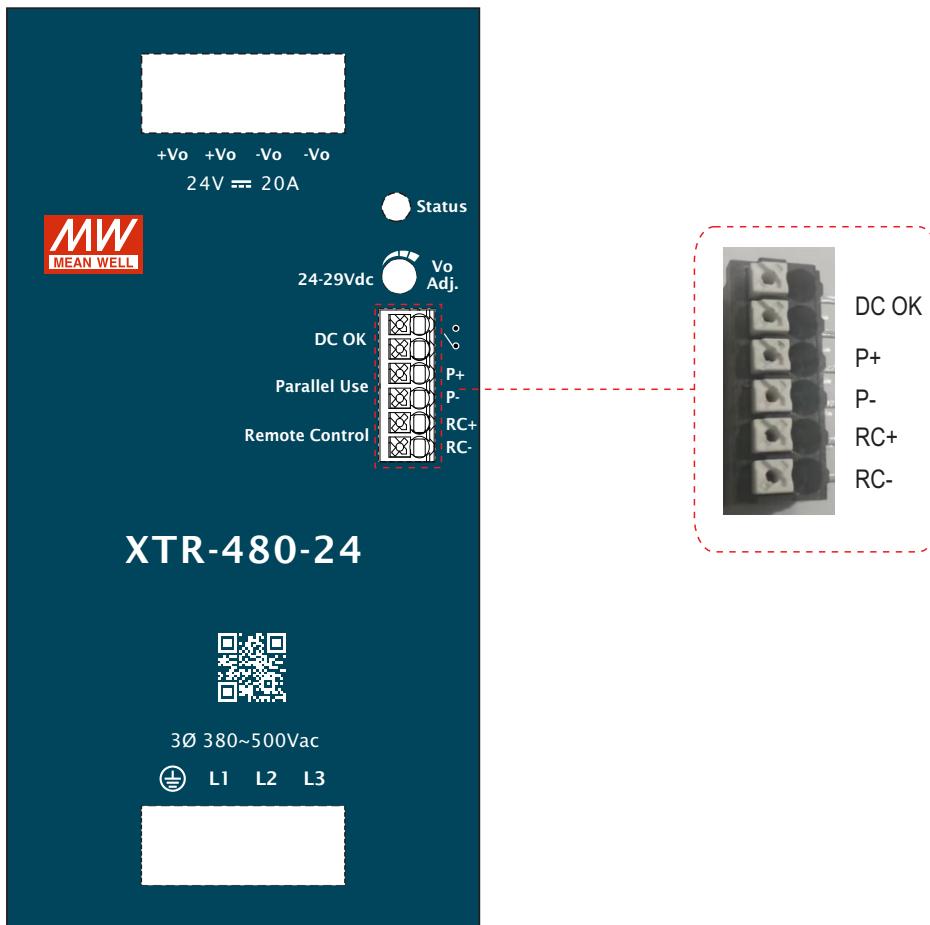

## 1. Parallel Use

XTR-480 has the built-in active current sharing function and can be connected in parallel, up to 4 units, to provide higher output power as exhibited below :

(1) Parallel operation is available by connecting the units shown as below (P+,P- are connected mutually in parallel).

(2) Difference of output voltages among parallel units should be less than 0.2V.

(3) The total output current must not exceed the value determined by the following equation (Output current at parallel operation)=(The rated current per unit) x (Number of unit) x 0.9.

(4) In parallel operation 4 units is the maximum, please consult the manufacturer for other applications.


(5) The power supplies should be paralleled using short and large diameter wiring and then connected to the load.

(6) When in parallel operation, the minimum output load should be greater than 5% of total output load. (Min. load >5% rated current per unit x number of unit)

(7) In parallel connection, maybe only one unit (master) operate if the total output load is less than 5% of rated load condition.

The other PSUs (slaves) may go into standby mode and their output LEDs & relays will not turn on.



(8) P+ and P- lines should be twisted in pairs

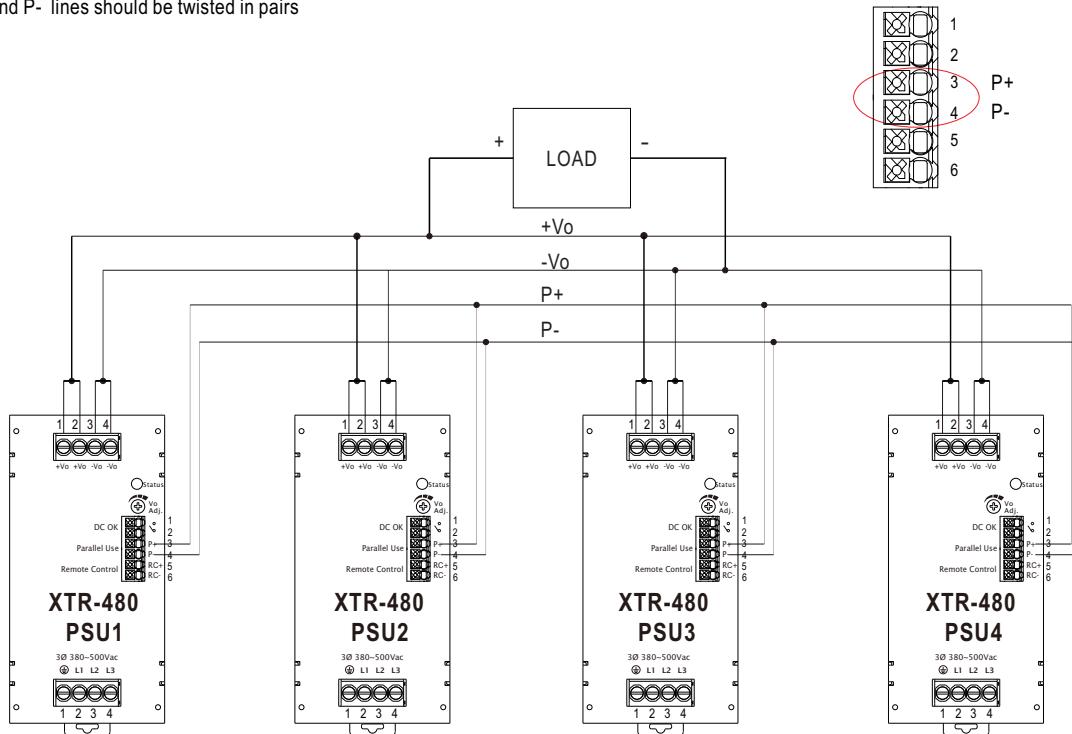

※ Please contact MEAN WELL for more details.

## 2. DC OK Relay Contact

Contact Close	PSU turns ON / DC OK.
Contact Open	PSU turns OFF / DC Fail.
Contact ratings (max.)	30Vdc/1A,30Vac/0.5A resistive load.

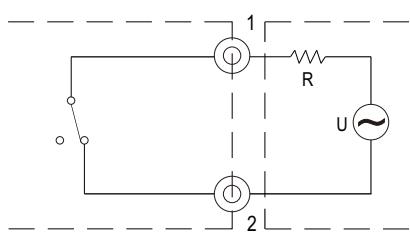






External voltage source (U) and resistor (R)  
(The max. Sink is 30Vdc/1A,30Vac/0.5A)

### 3. Remote ON/OFF Control

The PSU can be turned ON/OFF by using the "Remote Control" function.


PSU Vo Status	Between RC+ and RC-
Remote power ON	Open or keep 2~5Vdc
Remote power OFF	Short or keep <0.5Vdc



			
R.C. by external switch.	R.C. by user's optocoupler control module.	R.C. by user's external auxiliary power.	R.C. by user's Relay control module.

### 4. Protection Against Reverse Voltages from the Load

Prevent PSU damage from Back Electro magnetic Force during deceleration of motor or inductive load.

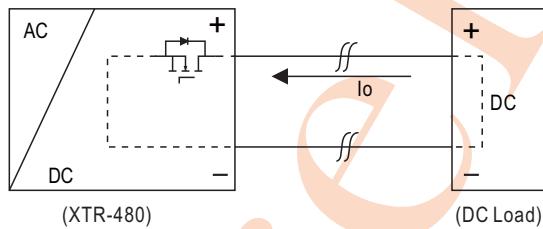


PSU'S ORing FET turn OFF voltage	
MODEL	Max. allowable reverse voltage
XTR-480-12	<16V
XTR-480-24	<35V
XTR-480-36	<50V
XTR-480-48	<63V

## ■ Mechanical Specification




(Unit:mm , Tolerance  $\pm 1$ mm)

Case No.305

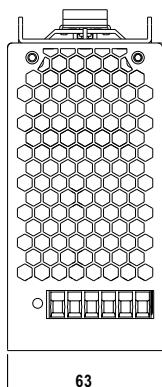


Ⓐ: Terminal Pin No. Assignment

Pin No.	Assignment
1,2,3	DC Output +Vo
4,5,6	DC Output -Vo

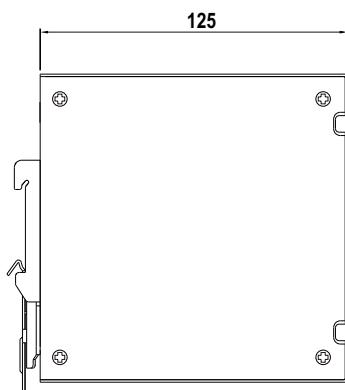


④: Terminal Pin No. Assignment

Pin No.	Assignment
1	FG (GND)
2	AC/L1
3	AC/L2
4	AC/L3



## ■ Recommend Wiring

	AC Input T.B	DC Output T.B	Signal connector
Solid Wire	6mm <sup>2</sup> max.	6mm <sup>2</sup> max.	1.5mm <sup>2</sup> max.
A.W.G	18~10 AWG	18~10 AWG	24~16 AWG
Screw Terminal Torque	9 Lb-In	9 Lb-In	/

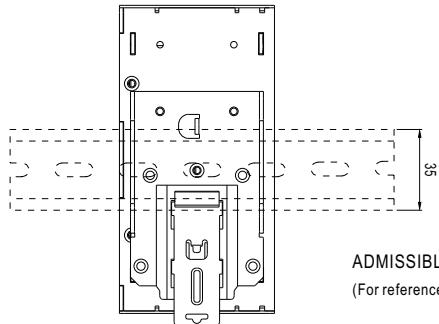**■ Installation Instruction**

This series fits DIN rail TS35/7.5 or TS35/15.  
For installation details, please refer to the Instruction manual.

ADMISSIBLE DIN-RAIL:TS35/7.5 OR TS35/15  
(For reference only. Not included with unit.)

**■ Installation Manual**

Please refer to : <http://www.meanwell.com/manual.html>