


BVT ALD 36 (918 408)


- For d.c. supply systems up to nominal currents of 7 A
- Low voltage protection level
- For installation in conformity with the lightning protection zone concept at the boundaries from $0_A - 2$ and higher



Figure without obligation

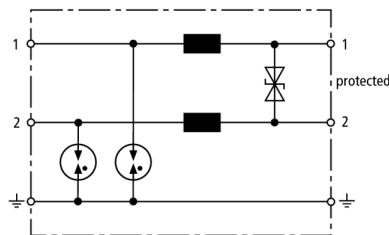

Basic circuit diagram BVT ALD 36

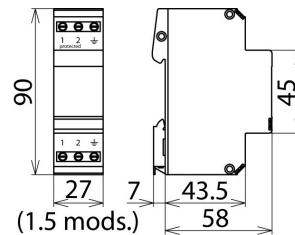

Dimension drawing BVT ALD 36

Energy-coordinated, DIN rail mounted combined lightning current and surge arrester for protecting unearthed d.c. power supply systems.

Type	BVT ALD 36
Part No.	918 408
SPD class	TYPE 1P1
Nominal voltage (d.c.) (U_N)	36 V
Max. continuous operating voltage (d.c.) (U_c)	45 V
Nominal current at 80 °C (I_L)	4 A
Nominal current at 45 °C (I_L)	7 A
D1 Lightning impulse current (10/350 µs) per line (I_{imp})	2.5 kA
D1 Total lightning impulse current (10/350 µs) (I_{imp})	5 kA
C2 Nominal discharge current (8/20 µs) per line (I_n)	10 kA
C2 Total nominal discharge current (8/20 µs) (I_n)	20 kA
Voltage protection line-line for I_n C2 (U_p)	≤ 80 V
Voltage protection level line-PG for I_n C2 (U_p)	≤ 1000 V
Voltage protection level line-line at 1 kV/µs C3 (U_p)	≤ 60 V
Voltage protection level line-PG at 1 kV/µs C3 (U_p)	≤ 650 V
Series resistance per line	22 µH
Capacitance line-line (C)	≤ 1.5 pF
Capacitance line-PG (C)	≤ 100 pF
Operating temperature range (T_u)	-40 °C ... +80 °C
Degree of protection	IP 20
For mounting on	35 mm DIN rails acc. to EN 60715
Connection (input / output)	screw / screw
Cross-sectional area, solid	0.5-6.0 mm ²
Cross-sectional area, flexible	0.5-4.0 mm ²
Tightening torque (terminals)	0.8 Nm
Earthing via	screw terminal
Enclosure material	thermoplastic, UL 94 V-0
Colour	yellow
Test standards	IEC 61643-21 / EN 61643-21
Approvals	UL, EAC
Weight	110 g
Customs tariff number (Comb. Nomenclature EU)	85363010
GTIN	4013364125292
PU	1 pc(s)

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.