



# Actinic BL TL-D(K) Secura

## Actinic BL TL-D TL-D 18W/10 Secura 1SL/25

With an optimized spectrum matching the eye sensitivity of the housefly, Actinic BL TL-D(K) Secura lamps are perfect for attracting insects. They have virtually no UV-B output, and so are perfectly safe. In addition, they have a special "Secura" sleeve that keeps all glass and components together in the case of accidental breakage. This eliminates the risk of glass splinters showering down on food preparation areas, for example. And that is why it meets the strict HACCP requirements. What's more, with the lowest mercury content in the industry and being 100% lead-free, these lamps represent a very good environmental choice.

### Product data

General Information		Operating and Electrical	
Cap-Base	G13 [ Medium Bi-Pin Fluorescent]	Power (Rated) (Nom)	18 W
Main Application	Reprography (R)	Lamp Current (Nom)	0.36 A
Life to 50% Failures (Nom)	9000 h	Voltage (Nom)	59 V
Useful Life (Nom)	5000 h	Approval and Application	
Light Technical		Mercury (Hg) Content (Nom)	5.0 mg
Color Code	10	UV	
Color Designation	Actinic	UV-B/UV-A (IEC)	0.2 %
Chromaticity Coordinate X (Nom)	220	UV-A Radiation 100Hr (IEC)	4.5 W
Chromaticity Coordinate Y (Nom)	200	Product Data	
UV Depreciation at 2000 h	20 %	Full product code	872790085383400
UV Depreciation at 5000 h	30 %	Order product name	Actinic BL TL-D TL-D 18W/10 Secura 1SL/25

# Actinic BL TL-D(K) Secura


EAN/UPC - Product	8727900853834
Order code	928048201003
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25

Material Nr. (12NC)	928048201003
Net Weight (Piece)	127.500 g

## Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.



## Dimensional drawing



Product	D (max)	A (max)	B (max)	B (min)	C (max)
Actinic BL TL-D TL-D 18W/10	28 mm	589.8 mm	596.9 mm	594.5 mm	604 mm
Secura 1SL/25					

### TL-D 18W/10 SECU

## Photometric data

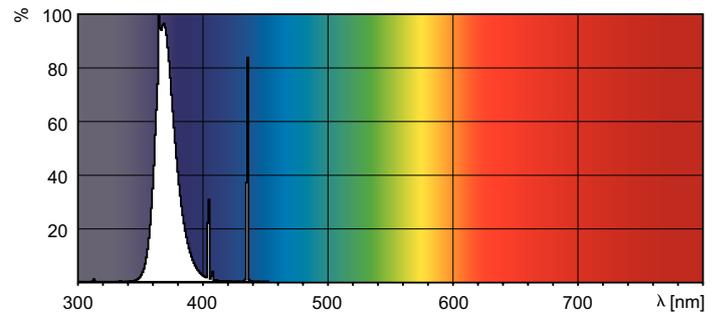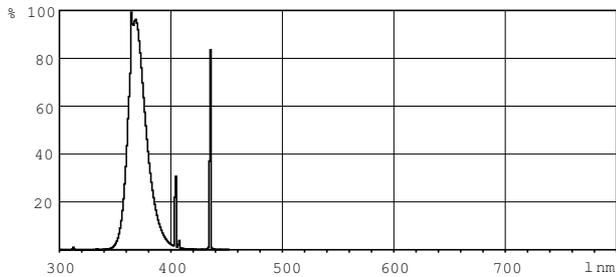

### Lightcolor /10

### Lightcolor /10

