

KBS 20 Cable bracket for shooting/screwing 30460



Areas of application:

Cable Routing of up to 22 cables (3 x 1.5 mm²) after ceiling installation with all common direct shooting fastening systems.

Installation Guide:

- Attach the KSB to the muzzle of the shooting device and shoot the ESP at the desired location
- Insert the cable/s into the gap between the wall or ceiling
- If required, up to three EC clamps can be attached directly to the KSB (on the sides - any pipe diameter size, at the horns in the middle - only the EC 20)

Product details:

Colour	light grey
Content pack/box	100 / 500
Length in mm	200
max. nail thickness	3 mm

Product benefits/properties:


The easy insertion and perfect alignment of up to 20 cables directly on the ceiling after mounting with gas tools from Hilti, Spit or Wurth. Due to the clamping force of the KBS, despite variable high temperatures a durable installation is always maintained. It is possible to add a 20 mm EC Euro Clip for pipe installation to the centre of the KBS without any drilling. Mounting is also possible with a screw.

Technical data:

Material	PP, UV stabilised Temperature range: -10 °C up to +85 °C silicon-free Material tested according OVR R14 (LSFOH)
----------	---

Weight per piece 12,00 g

GTIN (EAN) 
9 008439 404605

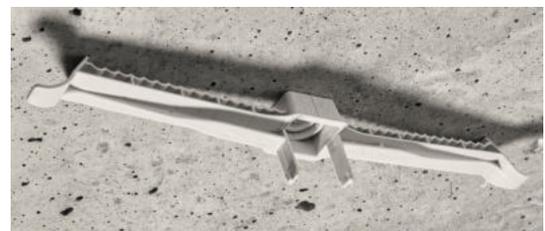

An additional EC Euro-Clip for Pipe installation can be mounted at the center of the KBS.



Schnabl Stecktechnik GmbH, Bahnhofplatz 1, po box 63, 3100 St. Pölten, Austria
Telephone +43 2742 22167-0. office@schnabl.works. www.schnabl.works

