

# FLEXBUS IP55 CONDUCTOR ENTRY, DOUBLE ENTRY, 176 MM X 157 MM X 152 MM

## CATALOG NUMBER

**FLEXCEIP55C1002**



nVent ERIFLEX Flexbus IP55 Conductor Entries can be used for switchboard and/or power supply cover to upgrade an installation to IP55 level. Protect the nVent ERIFLEX Flexbus Conductor insulation against sharp edges from power supply or switchboard top cover.

## CERTIFICATIONS



## FEATURES

Made with soft PVC to follow any potential conductor bending radius

Sealing around the conductor is made by a self-fusing tape with a strong adhesive

Good resistance to solvent and hydrocarbon splashes

Adaptable to any nVent ERIFLEX Flexbus conductor cross section by cutting the top material with traditional cutter

High acid resistance

UV resistance

RoHS compliant

Flame retardant

## PRODUCT ATTRIBUTES

Article Number: 508143

Material: Polyvinylchloride

Enclosure Rating: IP 55

Type: Double Entry

Working Temperature: -40 to 140 °C

A: 176 mm

B: 157 mm


C: 152 mm

Conductor Size: 960 mm²; 1280 mm²; 1810 mm²

Torque: 2.5 N·m

Unit Weight: 1 kg

DIAGRAMS

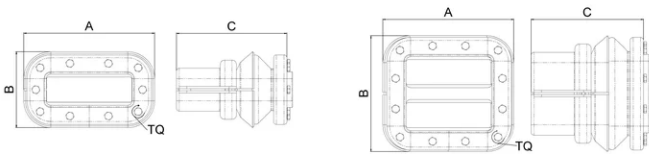

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at [www.nvent.com](http://www.nvent.com) and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

North America

+1.800.753.9221  
Option 1 – Customer Care  
Option 2 – Technical Support

Europe

Netherlands:  
+31 800-0200135  
France:  
+33 800 901 793

Europe

Germany:  
800 1890272  
Other Countries:  
+31 13 5835404

APAC

Shanghai:  
+ 86 21 2412 1618/19  
Sydney:  
+61 2 9751 8500



Our powerful portfolio of brands:  
**nVent.com CADDY ERICO HOFFMAN RAYCHEM SCHROFF**  
**TRACER**