



## ■ Features :

- Universal AC input / Full range (up to 305VAC)
- Built-in active PFC function
- Protections: Short circuit / Over current / Over voltage / Over temperature
- Cooling by free air convection
- OCP point adjustable through output cable or internal potentiometer
- IP64 design for indoor or outdoor installations
- Class 2 power unit
- Three in one dimming function (1~10Vdc or PWM signal or resistance)
- Suitable for LED lighting and moving sign applications
- Compliance to worldwide safety regulations for lighting
- Suitable for dry / damp locations or outdoor application
- 3 years warranty



SELV

IP64



(for 48V,54V only)



US (except for 48V,54V)



CB CE

HLN-60H-15 **A** A : IP64 rated. Output voltage and constant current level can be adjusted through internal potentiometer.  
 B : IP64 rated. Constant current level adjustable through output cable with 1~10Vdc or 10V PWM signal or resistance.


## SPECIFICATION

MODEL	HLN-60H-15	HLN-60H-20	HLN-60H-24	HLN-60H-30	HLN-60H-36	HLN-60H-42	HLN-60H-48	HLN-60H-54	
OUTPUT	<b>DC VOLTAGE</b>	15V	20V	24V	30V	36V	42V	48V	54V
	CONSTANT CURRENT REGION Note.4	9 ~ 15V	12 ~ 20V	14.4 ~ 24V	18 ~ 30V	21.6 ~ 36V	25.2 ~ 42V	28.8 ~ 48V	32.4 ~ 54V
	<b>RATED CURRENT</b>	4A	3A	2.5A	2A	1.7A	1.45A	1.3A	1.15A
	<b>RATED POWER</b>	60W	60W	60W	60W	61.2W	60.9W	62.4W	62.1W
	<b>RIPPLE &amp; NOISE (max.) Note.2</b>	150mVp-p	150mVp-p	150mVp-p	200mVp-p	200mVp-p	300mVp-p	300mVp-p	300mVp-p
	<b>VOLTAGE ADJ. RANGE Note.6</b>	13.5 ~ 17V	17 ~ 22V	22 ~ 27V	27 ~ 33V	33 ~ 40V	40 ~ 46V	44 ~ 53V	49 ~ 58V
	<b>CURRENT ADJ. RANGE</b>	Can be adjusted by internal potentiometer or through output cable							
	2.4 ~ 4A	1.8 ~ 3A	1.5 ~ 2.5A	1.2 ~ 2A	1 ~ 1.7A	0.87 ~ 1.45A	0.78 ~ 1.3A	0.69 ~ 1.15A	
	<b>VOLTAGE TOLERANCE Note.3</b>	±2.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%
	<b>LINE REGULATION</b>	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
INPUT	<b>LOAD REGULATION</b>	±1.5%	±1.0%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	<b>SETUP, RISE TIME Note.7</b>	1500ms, 80ms / 115VAC at full load							
	1000ms, 80ms / 230VAC at full load								
	<b>HOLD UP TIME (Typ.)</b>	16ms/230VAC	16ms/115VAC at full load						
	<b>VOLTAGE RANGE Note.5</b>	90 ~ 305VAC							
	<b>FREQUENCY RANGE</b>	47 ~ 63Hz							
	<b>POWER FACTOR (Typ.)</b>	PF>0.98/115VAC, PF>0.95/230VAC, PF>0.92/277VAC at full load (Please refer to "Power Factor Characteristic" curve)							
	<b>EFFICIENCY (Typ.)</b>	87%	88.5%	89%	89.5%	90%	90%	90.5%	90.5%
	<b>AC CURRENT (Typ.)</b>	0.64A / 115VAC	0.32A / 230VAC	0.3A / 277VAC					
	<b>INRUSH CURRENT(Typ.)</b>	COLD START 70A/230VAC							
PROTECTION	<b>LEAKAGE CURRENT</b>	<0.75mA / 277VAC							
	<b>OVER CURRENT Note.4</b>	95 ~ 108%							
	Protection type : Constant current limiting, recovers automatically after fault condition is removed								
	<b>SHORT CIRCUIT</b>	Hiccup mode, recovers automatically after fault condition is removed							
	<b>OVER VOLTAGE</b>	18 ~ 24V	23 ~ 30V	28 ~ 35V	35 ~ 43V	41 ~ 49V	48 ~ 58V	54 ~ 63V	59 ~ 68V
ENVIRONMENT	Protection type : Shut down o/p voltage, re-power on to recover								
	<b>OVER TEMPERATURE</b>	95°C ±10°C (RTH2)							
	Protection type : Shut down o/p voltage, re-power on to recover								
	<b>WORKING TEMP.</b>	-40 ~ +50°C (Refer to "Derating Curve")							
	<b>WORKING HUMIDITY</b>	20 ~ 95% RH non-condensing							
SAFETY & EMC	<b>STORAGE TEMP., HUMIDITY</b>	-40 ~ +80°C, 10 ~ 95% RH							
	<b>TEMP. COEFFICIENT</b>	±0.03%/°C (0 ~ 40°C)							
	<b>VIBRATION</b>	10 ~ 500Hz, 2G 12min./1cycle, period for 72min. each along X, Y, Z axes							
	<b>SAFETY STANDARDS</b>	UL8750, CSA C22.2 No. 250.0-08 (except for 48V, 54V), EN61347-1, EN61347-2-13 independent, IP64, J61347-1, J61347-2-13 approved ; design refer to UL60950-1, TUV EN60950-1, EN60335-1							
OTHERS	<b>WITHSTAND VOLTAGE</b>	I/P-O/P:3.75KVAC I/P-FG:1.88KVAC O/P-FG:0.5KVAC							
	<b>ISOLATION RESISTANCE</b>	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH							
	<b>EMC EMISSION</b>	Compliance to EN55015, EN61000-3-2 Class C (≥60% load) ; EN61000-3-3							
	<b>EMC IMMUNITY</b>	Compliance to EN61000-4-2,3,4,5,6,8,11; EN61547, EN55024, light industry level (surge 4KV), criteria A							
NOTE	<b>MTBF</b>	338Khrs min. MIL-HDBK-217F (25°C)							
	<b>DIMENSION</b>	161*61.5*35mm (L*W*H)							
	<b>PACKING</b>	0.46Kg;32pcs/15.7Kg/1.10CUFT							
<ol style="list-style-type: none"> <li>1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.</li> <li>2. Ripple &amp; noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf &amp; 47uf parallel capacitor.</li> <li>3. Tolerance : includes set up tolerance, line regulation and load regulation.</li> <li>4. Constant current operation region is within 60% ~100% rated output voltage. This is the suitable operation region for LED related applications, but please reconfirm special electrical requirements for some specific system design.</li> <li>5. Derating may be needed under low input voltages. Please check the static characteristics for more details.</li> <li>6. Type A only.</li> <li>7. Length of set up time is measured at cold first start. Turning ON/OFF the power supply may lead to increase of the set up time.</li> <li>8. The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.</li> </ol>									


## ■ Mechanical Specification

Case No.HLN-60A Unit:mm

A Type:(HLN-60H\_A)

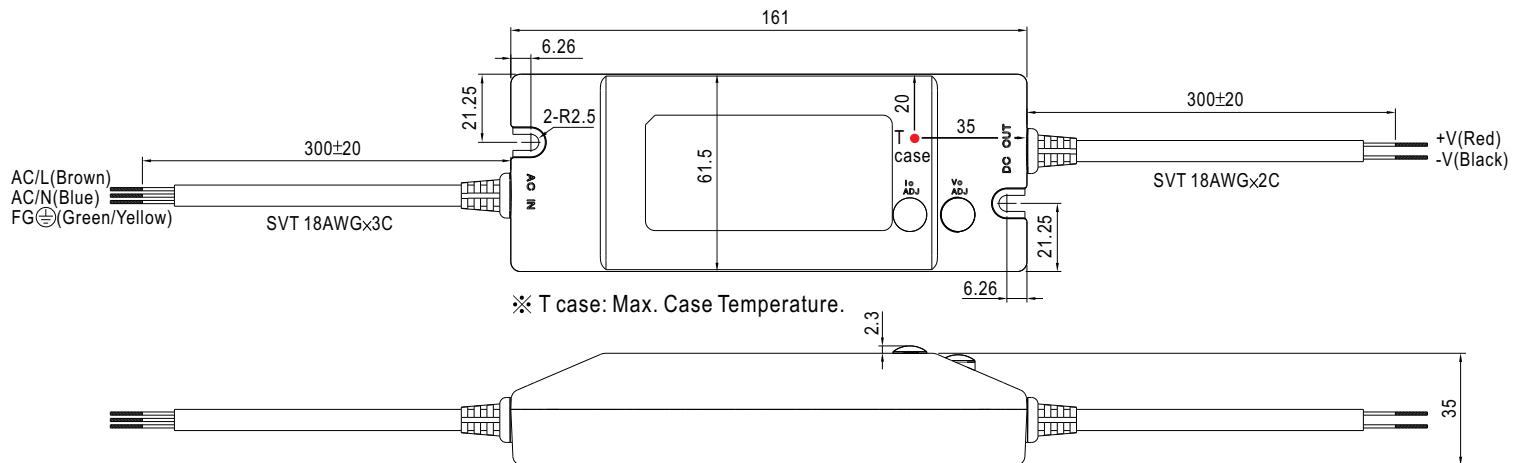





B Type:(HLN-60H\_B)

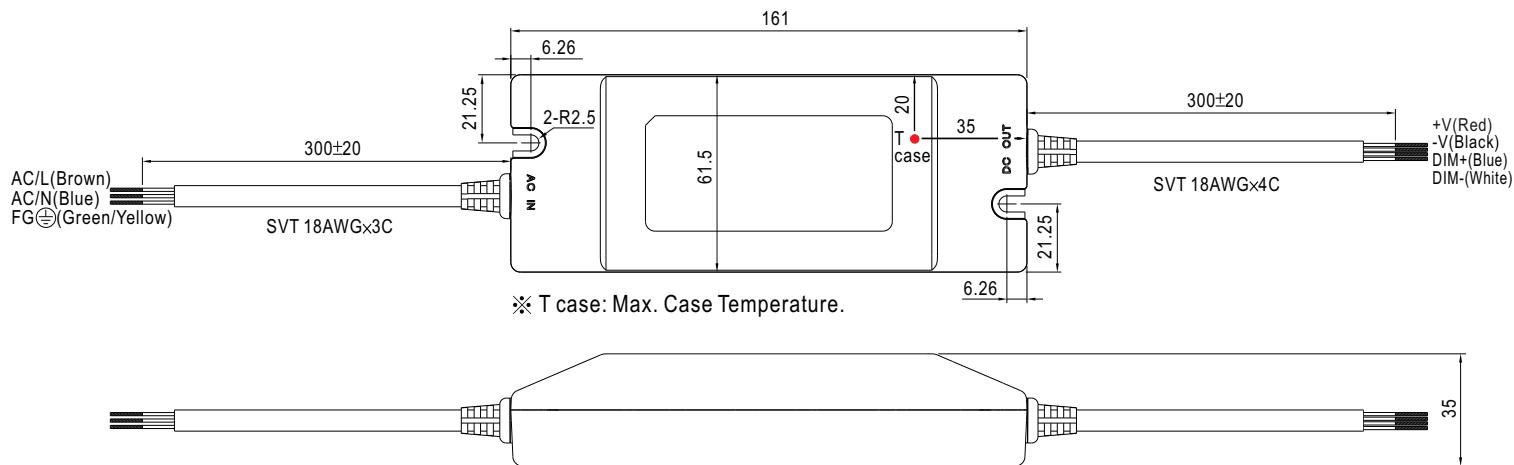


## ■ Block Diagram

fosc : 100KHz

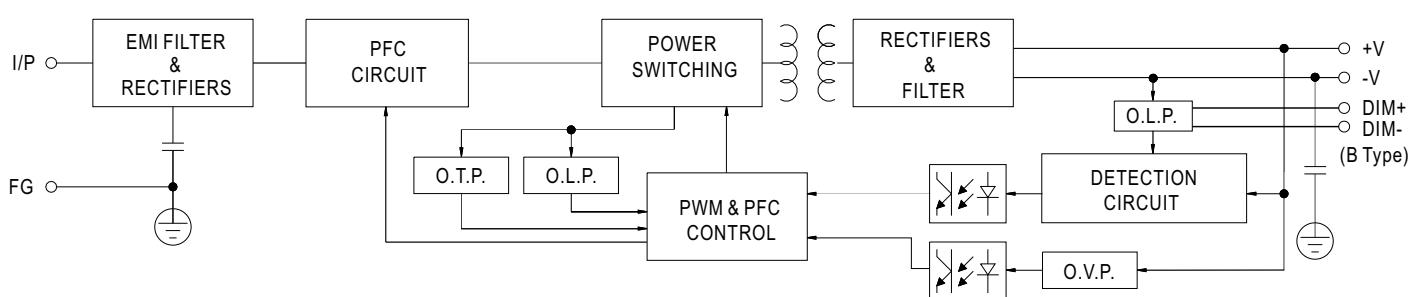

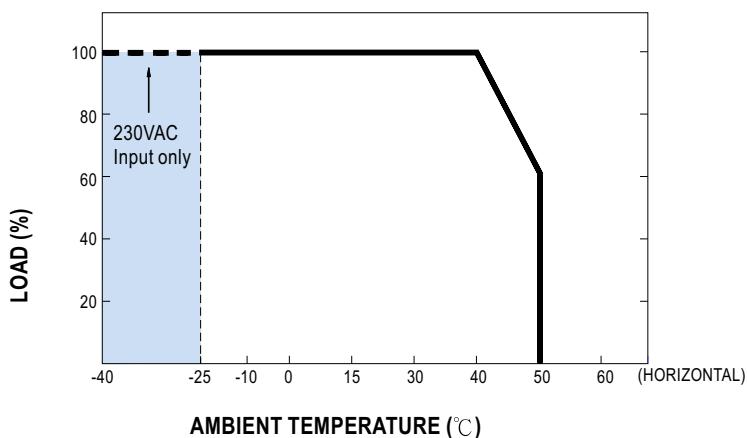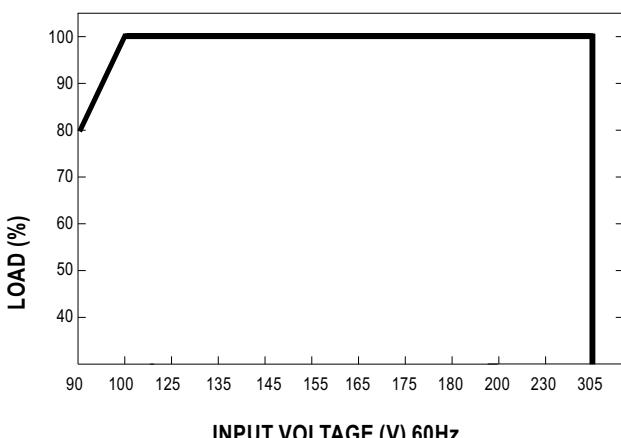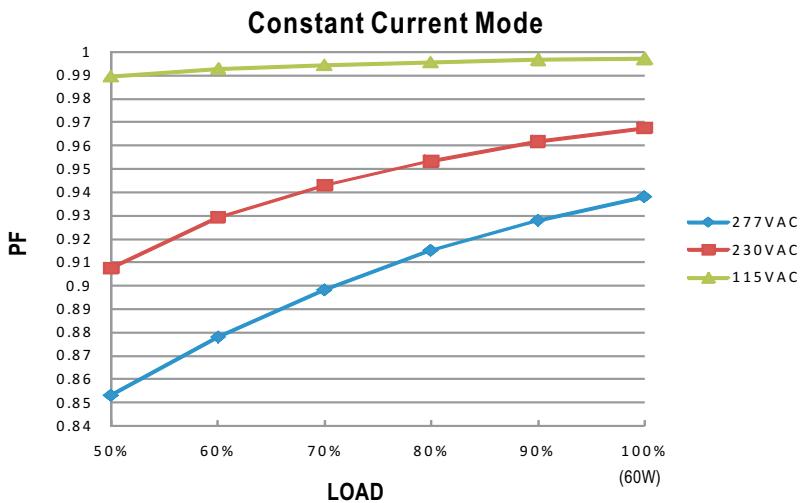**■ Derating Curve**

**■ Static Characteristics**

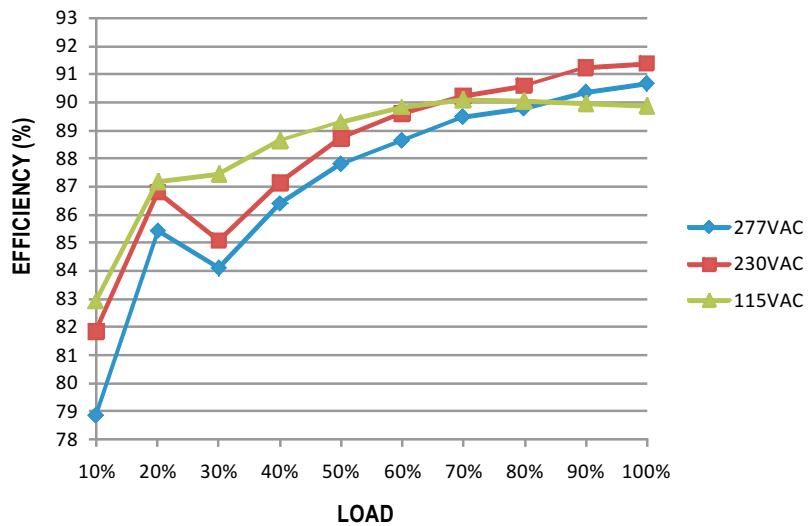**■ Power Factor Characteristic**

**■ EFFICIENCY vs LOAD (48V Model)**

HLN-60H series possess superior working efficiency that up to 90.5% can be reached in field applications.




## ■ DRIVING METHODS OF LED MODULE

There are two major kinds of LED drive method "direct drive" and "with LED driver".


A typical LED power supply may either work in "constant voltage mode (CV) or constant current mode (CC)" to drive the LEDs.

Mean Well's LED power supply with CV+ CC characteristic can be operated at both CV mode (with LED driver, at area (A) and CC mode (direct drive, at area (B).

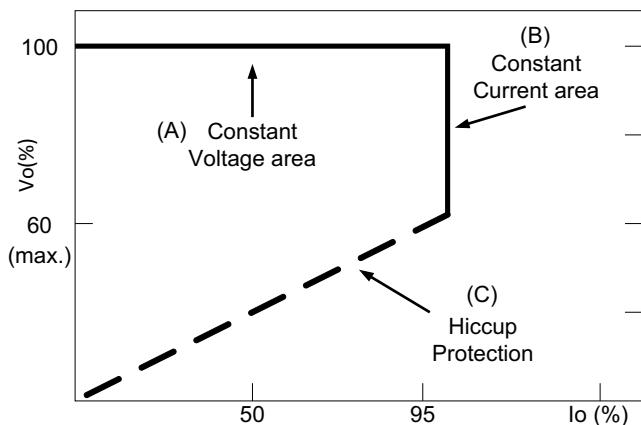

Typical LED power supply I-V curve

## ■ DIMMING OPERATION(for B-type only)

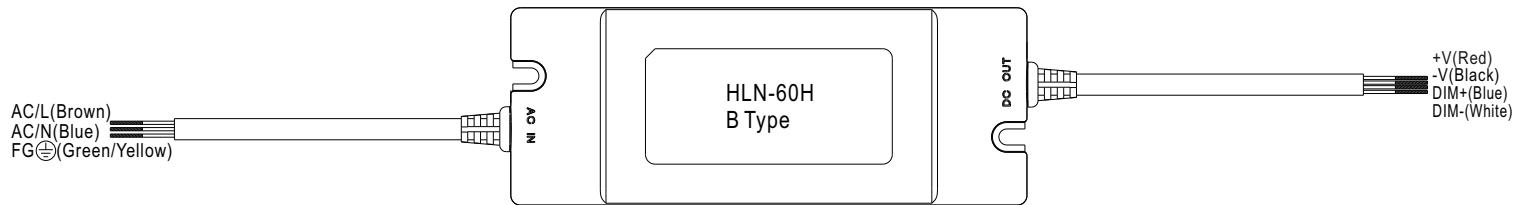

※ Vo and Io can not be adjusted (B type)

※ Built-in 3 in 1 dimming function, IP64 rated. Output constant current level can be adjusted through output cable by connecting a resistance or 1~10Vdc or 10V PWM signal between DIM+ and DIM-.

※ Please DO NOT connect "DIM-" to "-V".

※ Reference resistance value for output current adjustment (Typical)

Resistance value	Single driver	10KΩ	20KΩ	30KΩ	40KΩ	50KΩ	60KΩ	70KΩ	80KΩ	90KΩ	100KΩ	OPEN
	Multiple drivers (N=driver quantity for synchronized dimming operation)	10KΩ/N	20KΩ/N	30KΩ/N	40KΩ/N	50KΩ/N	60KΩ/N	70KΩ/N	80KΩ/N	90KΩ/N	100KΩ/N	-----
Percentage of rated current		10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~105%

※ 1~10V dimming function for output current adjustment (Typical)


Dimming value	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~105%

※ 10V PWM signal for output current adjustment (Typical): Frequency range:100Hz ~ 3KHz

Duty value	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~105%

※Using the built-in dimming function on B-type model can't turn the lighting fixture totally dark. Please refer to the connection method below to achieve 0% brightness of the lighting fixture connecting to the LED power supply unit.

Dimming connection diagram for turning the lighting fixture ON/OFF :

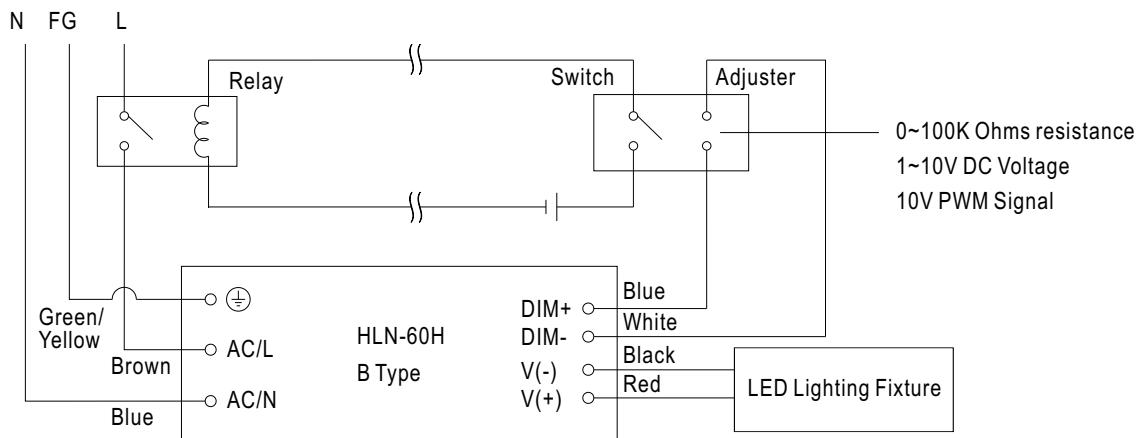

Using a switch and relay can turn ON/OFF the lighting fixture.

1. Output constant current level can be adjusted through output cable by connecting a resistance or 1~10Vdc or 10V PWM signal between DIM+ and DIM-.
2. The LED lighting fixture can be turned ON/OFF by the switch.