


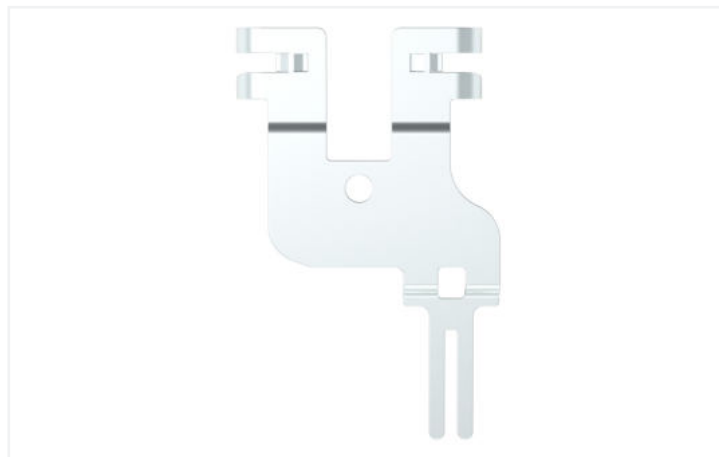

## Shield termination WINSTA® MIDI 5-pole

The shield termination from the WINSTA® MIDI product line guarantees you the greatest flexibility in electrical installation. With WAGO, you get enjoy the advantages of a large selection of accessories for the WINSTA® product line. The WINSTA® MIDI Pluggable Connection System with Push-in CAGE CLAMP® spring pressure connection technology facilitates exemplary electrification. Due to the integrated test slot, it is possible to check connections even when they are plugged in. That saves time and reduces installation labor and costs.

Push-in CAGE CLAMP® spring pressure connection technology – pluggable installation instead of laborious screw connections!

The WINSTA® Pluggable Connection System is perfectly tailored to the very strict requirements of building installation. It makes electrical installation pluggable, and thus faster, even more reliable, and error-free. Using this pre-assembled system decreases time spent on assembly and installation errors at the construction site. Choose quality and durability – with protection against mismatching from WAGO makes the electrical installation of electrical components noticeably easier.

- for automation controllers
- quick replacement of defective units during ongoing operation

## Údaje o připojení

## Připojení 1

|            |   |
|------------|---|
| Počet pólů | 5 |
|------------|---|

## Fyzické údaje

|         |                       |
|---------|-----------------------|
| Šířka   | 25,6 mm / 1.008 palců |
| Výška   | 5,45 mm / 0.215 palců |
| Hloubka | 44,8 mm / 1.764 palců |

## Mechanické údaje

|        |                        |
|--------|------------------------|
| Vhodné | Pro zásuvku a zástrčku |
|--------|------------------------|

| Údaje o materiálu              |                                                               |
|--------------------------------|---------------------------------------------------------------|
| Upozornění (údaje o materiálu) | <a href="#">Zde najdete informace o specifikaci materiálu</a> |
| Požární zatížení               | 0 MJ                                                          |
| Hmotnost                       | 0,3 g                                                         |
| Materiál                       | Měď (SE Cu); speciální pocínování                             |

| Požadavky na prostředí               |                                     |
|--------------------------------------|-------------------------------------|
| Teplota pro zpracování               | -5 ... +40 °C                       |
| Trvalá provozní teplota              | -35 ... +85 °C                      |
| Upozornění k trvalé provozní teplotě | Izolační části pro teploty ≤ 105 °C |

| Obchodní údaje       |               |
|----------------------|---------------|
| ETIM 9.0             | EC002863      |
| ETIM 8.0             | EC002863      |
| PU (SPU)             | 50 ks         |
| Druh balení          | Box           |
| Země původu          | DE            |
| GTIN                 | 4066966242829 |
| Číslo celního tarifu | 85366990990   |

| Soulad produktů s ekologickými standardy |                         |
|------------------------------------------|-------------------------|
| RoHS Compliance Status                   | Compliant, No Exemption |

Ke stažení

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 770-526

↓

CAD/CAE-Data

CAD data

2D/3D Models 770-526

↓