



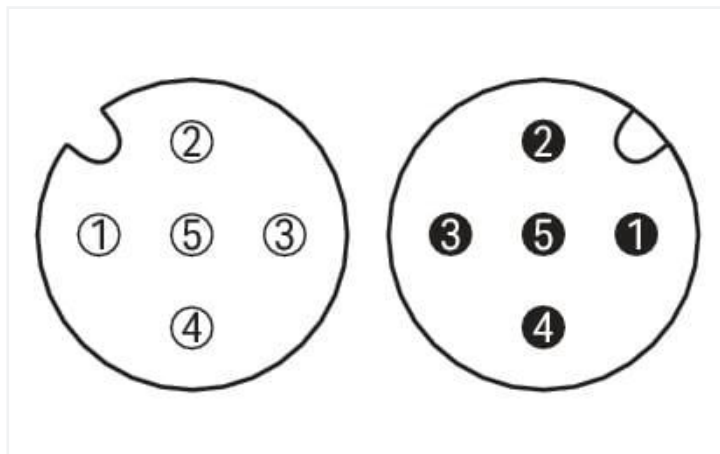

Ilustrační fotografie

A diagram of a 5-bit shift register. On the left, there are five input lines labeled 1 through 5, each with a corresponding colored circle: 1 (brown), 2 (white), 3 (blue), 4 (black), and 5 (gray). On the right, there are five output lines labeled 1 through 5, each with a corresponding colored square: 1 (brown), 2 (white), 3 (blue), 4 (black), and 5 (gray). The connections are as follows: Input 1 connects to Output 5; Input 2 connects to Output 4; Input 3 connects to Output 3; Input 4 connects to Output 2; and Input 5 connects to Output 1. This represents a bit-reversal operation.

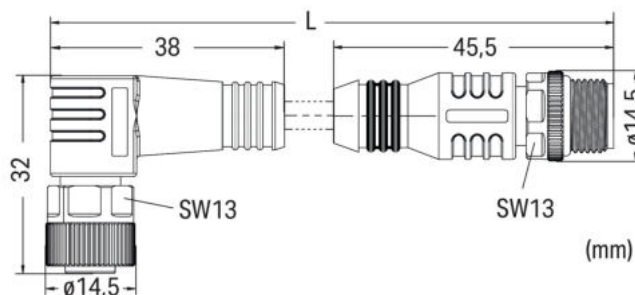

Provozní napětí	300 VDC
Stupeň krytí	IP67
Okolní teplota (při provozu) (statická)	-40 ... +80 °C
Okolní teplota (při provozu) (dynamická)	-20 ... +60 °C

Délka kabelu	5 m
Barva kabelu s pláštěm	Černá

Počet pólů	5
Směr připojení kabelu vůči směru spojení	90 °
Směr připojení kabelu vůči směru spojení (2)	0 °

Kódování rozhraní konektoru (kabel/adaptér) 1 1	Kódování A
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
15	15
16	16
17	17
18	18
19	19
20	20
21	21
22	22
23	23
24	24
25	25
26	26
27	27
28	28
29	29
30	30
31	31
32	32
33	33
34	34
35	35
36	36
37	37
38	38
39	39
40	40
41	41
42	42
43	43
44	44
45	45
46	46
47	47
48	48
49	49
50	50
51	51
52	52
53	53
54	54
55	55
56	56
57	57
58	58
59	59
60	60
61	61
62	62
63	63
64	64
65	65
66	66
67	67
68	68
69	69
70	70
71	71
72	72
73	73
74	74
75	75
76	76
77	77
78	78
79	79
80	80
81	81
82	82
83	83
84	84
85	85
86	86
87	87
88	88
89	89
90	90
91	91
92	92
93	93
94	94
95	95
96	96
97	97
98	98
99	99
100	100

Kódování rozhraní konektoru (kabel/adaptér) 1 2	Kódování A
00	00
01	01
02	02
03	03
04	04
05	05
06	06
07	07
08	08
09	09
10	10
11	11
12	12
13	13
14	14
15	15
16	16
17	17
18	18
19	19
20	20
21	21
22	22
23	23
24	24
25	25
26	26
27	27
28	28
29	29
30	30
31	31
32	32
33	33
34	34
35	35
36	36
37	37
38	38
39	39
40	40
41	41
42	42
43	43
44	44
45	45
46	46
47	47
48	48
49	49
50	50
51	51
52	52
53	53
54	54
55	55
56	56
57	57
58	58
59	59
60	60
61	61
62	62
63	63
64	64
65	65
66	66
67	67
68	68
69	69
70	70
71	71
72	72
73	73
74	74
75	75
76	76
77	77
78	78
79	79
80	80
81	81
82	82
83	83
84	84
85	85
86	86
87	87
88	88
89	89
90	90
91	91
92	92
93	93
94	94
95	95
96	96
97	97
98	98
99	99



Obchodní údaje	
ETIM 9.0	EC001855
ETIM 8.0	EC001855
PU (SPU)	1 ks
Druh balení	Rozbaleno
Země původu	CN
GTIN	4066966489101
Číslo celního tarifu	85444290900

Soulad produktů s ekologickými standardy	
RoHS Compliance Status	Compliant,No Exemption

Ke stažení

Environmental Product Compliance

Compliance Search

Environmental Product Compliance
756-6403/050-050

↓