





Barva: ■ Černá

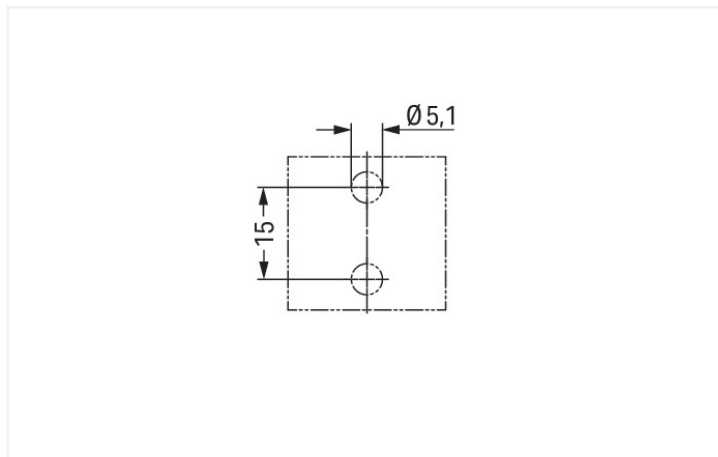

Rozměry v mm

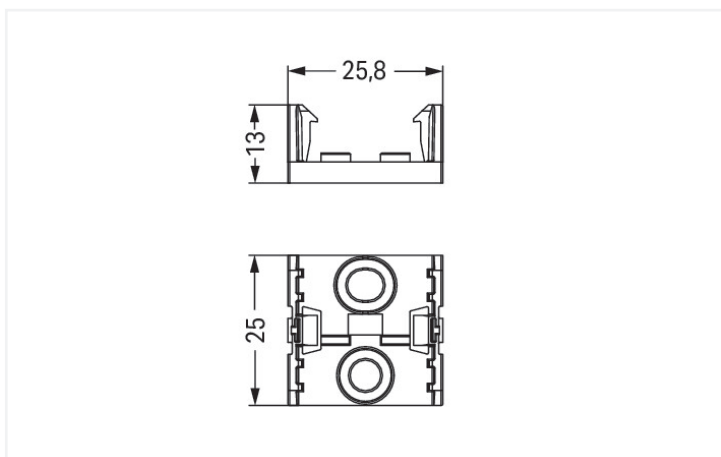

Rozměry v mm

Mounting accessories WINSTA® MINI 4-pole

Implement your installation project without difficulty: The mounting accessories from the WINSTA® MINI product line is the product of your choice for error-free electrical installation. You can rely on the quality of WINSTA® components from WAGO for your electrical installation accessories too. Due to its particularly small dimensions, our WINSTA® MINI Pluggable Connection System with Push-in CAGE CLAMP® spring pressure connection technology is very suitable in very tight spaces, i.e., for connections when very little room is available.

Push-in CAGE CLAMP® spring pressure connection technology – pluggable installation instead of laborious screw connections!

The WINSTA® Pluggable Connection System is perfectly tailored to the very strict requirements of building installation. It makes electrical installation pluggable, and thus more efficient, more reliable, and error-free. Using this pre-assembled system reduces assembly times and installation errors at the construction site. Now you can also cut installation expenses without compromising safety and quality: with protection against mismatching reduces the need for servicing and prevents unnecessary downtime.

- compact design for conductors with a cross-section up to 1.5 mm²
- fast, secure installation

Údaje o připojení

Připojení 1

Počet pólů	4
------------	---



Fyzické údaje	
Šířka	25,8 mm / 1.016 palců
Výška	13 mm / 0.512 palců
Hloubka	25 mm / 0.984 palců

Mechanické údaje	
Způsob montáže	Upevnění pomocí šroubů
Vhodné	Pro rozdělovače (s výjimkou rozdělovačů T); 4pól.

Údaje o materiálu	
Upozornění (údaje o materiálu)	Zde najdete informace o specifikaci materiálu
Barva	Černá
Izolační materiál	Polyamid (PA 66)
Třída hořlavosti podle UL94	V0
Požární zatížení	0,099 MJ
Hmotnost	2,1 g

Požadavky na prostředí	
Teplota pro zpracování	-5 ... +40 °C
Trvalá provozní teplota	-35 ... +85 °C
Upozornění k trvalé provozní teplotě	Izolační části pro teploty ≤ 105 °C

Obchodní údaje	
Product Group	20 (Winsta)
eCl@ss 10.0	27-44-06-92
eCl@ss 9.0	27-44-06-92
ETIM 9.0	EC002863
ETIM 8.0	EC002863
PU (SPU)	50 (50) ks
Druh balení	Box
Země původu	DE
GTIN	4055143838559
Číslo celního tarifu	39269097900

Soulad produktů s ekologickými standardy	
RoHS Compliance Status	Compliant, No Exemption

Atesty/certifikáty	
Approvals for marine applications	



Schválení	Standardní	Název certifikátu
LR Lloyds Register	EN 61535	08/20047 (E2)



Ke stažení			
Environmental Product Compliance			
Compliance Search			
Environmental Product Compliance 890-624			

Documentation			
Bid Text			
890-624	11.03.2015	doc 21.50 KB	
890-624	19.02.2019	xml 2.55 KB	

CAD/CAE-Data	
CAD data	CAE data
2D/3D Models 890-624	WSCAD Universe 890-624
	ZUKEN Portal 890-624