





Barva: ■ Černá

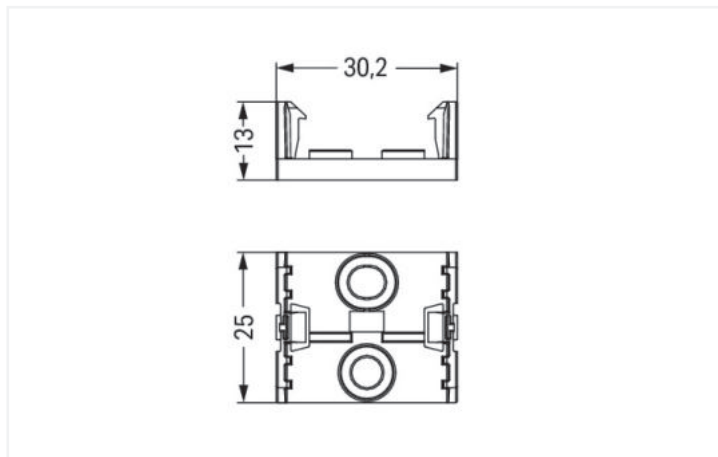

Rozměry v mm

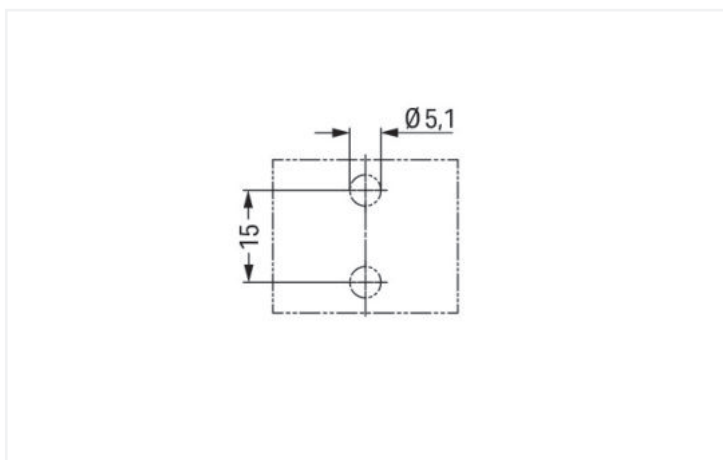

Rozměry v mm

Mounting accessories WINSTA® MINI 5-pole

With the mounting accessories from the WINSTA® MINI product line, zero-defect electrical installation is guaranteed. An extensive range of accessories complements the WINSTA® product line from WAGO. Especially if only limited space is available, our smallest pluggable connection system, WINSTA® MINI, conveniently displays its strengths. It is very compact, and, with Push-in CAGE CLAMP® spring pressure connection technology, it additionally saves time, since the connection is low-maintenance and can be performed without screw connections.

WINSTA® MINI solutions for your electrical installation – protected against mismatching and maintenance-free

The WINSTA® Pluggable Connection System is ideally tailored to the very strict requirements of building installation. It makes electrical installation pluggable, and thus more efficient, more reliable, and error-free. Using this pre-assembled system reduces assembly times and installation errors at the construction site. Now you can also cut installation costs without compromising quality and safety: with protection against mismatching eliminates the need for servicing and prevents unnecessary downtime.

- easy tool-free operation, a wide range of coding options
- quick replacement of defective units during ongoing operation

Údaje o připojení

Připojení 1

Počet pólů	5
------------	---

Fyzické údaje	
Šířka	30,2 mm / 1.189 palců
Výška	13 mm / 0.512 palců
Hloubka	25 mm / 1.189 palců

Mechanické údaje	
Způsob montáže	Upevnění pomocí šroubů
Vhodné	Pro rozdělovače (s výjimkou rozdělovačů T); 5pól.

Údaje o materiálu	
Upozornění (údaje o materiálu)	Zde najdete informace o specifikaci materiálu
Barva	Černá
Izolační materiál	Polyamid (PA 66)
Třída hořlavosti podle UL94	V0
Požární zatížení	0,106 MJ
Hmotnost	2,4 g

Požadavky na prostředí	
Teplota pro zpracování	-5 ... +40 °C
Trvalá provozní teplota	-35 ... +85 °C
Upozornění k trvalé provozní teplotě	Izolační části pro teploty ≤ 105 °C

Obchodní údaje	
Product Group	20 (Winsta)
eCl@ss 10.0	27-44-06-92
eCl@ss 9.0	27-44-06-92
ETIM 9.0	EC002863
ETIM 8.0	EC002863
PU (SPU)	50 (50) ks
Druh balení	Box
Země původu	DE
GTIN	4055143838757
Číslo celního tarifu	39269097900

Soulad produktů s ekologickými standardy	
RoHS Compliance Status	Compliant, No Exemption

Atesty/certifikáty	
Approvals for marine applications	



Schválení	Standardní	Název certifikátu
LR Lloyds Register	EN 61535	08/20047 (E2)



Ke stažení			
Environmental Product Compliance			
Compliance Search			
Environmental Product Compliance 890-625			

Documentation			
Bid Text			
890-625	11.03.2015	doc 21.50 KB	
890-625	19.02.2019	xml 2.55 KB	

CAD/CAE-Data			
CAD data		CAE data	
2D/3D Models 890-625		WSCAD Universe 890-625	
		ZUKEN Portal 890-625	