


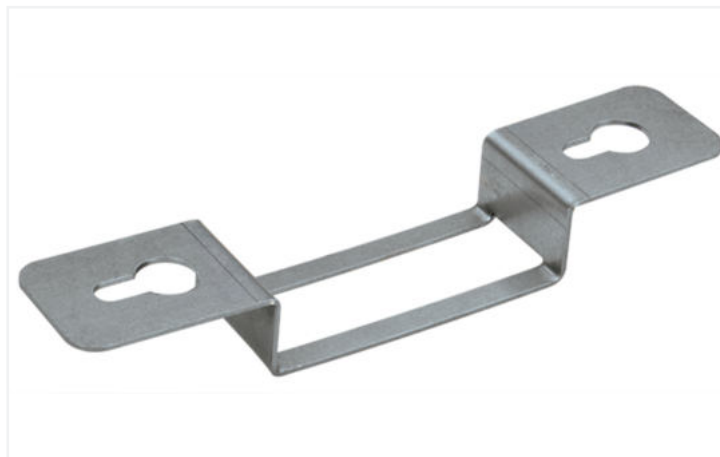

Barva: ■ Barva stříbra

#### Mounting accessories WINSTA® MIDI 5-pole

Put your trust in reliable accuracy for the installation for the implementation of your project: The mounting accessories from the WINSTA® MIDI product line. A comprehensive range of accessories rounds out the WINSTA® product line from WAGO. The WINSTA® MIDI product line offers maximum flexibility for the installation. With its Push-in CAGE CLAMP® spring pressure connection technology, it achieves time-saving, error-free installation and offers flexibility and customization for meeting all installation requirements.

WINSTA® MIDI solutions for your electrical installation – protected against mismatching and maintenance-free

The WINSTA® Pluggable Connection System allows pluggable electrical installation. This saves time, lowers costs, and reduces the need for servicing. Enjoy the benefits of the pluggable version of our maintenance-free spring pressure connection technology too! Plan your installation with with protection against mismatching from WAGO.

- pre-assembled versions
- quick replacement of defective units during ongoing operation

#### Údaje o připojení

##### Připojení 1

|            |   |
|------------|---|
| Počet pólů | 5 |
|------------|---|

#### Mechanické údaje

|        |                                  |
|--------|----------------------------------|
| Vhodné | Pro rozdělovače T; 2pól. – 5pól. |
|--------|----------------------------------|

#### Údaje o materiálu

Upozornění (údaje o materiálu)

[Zde najdete informace o specifikaci materiálu](#)

|                  |               |
|------------------|---------------|
| Barva            | Barva stříbra |
| Požární zatížení | 0 MJ          |
| Hmotnost         | 21,2 g        |
| Materiál         | Lakovaná ocel |



| Požadavky na prostředí               |                                     |  |
|--------------------------------------|-------------------------------------|--|
| Teplota pro zpracování               | -5 ... +40 °C                       |  |
| Trvalá provozní teplota              | -35 ... +85 °C                      |  |
| Upozornění k trvalé provozní teplotě | Izolační části pro teploty ≤ 105 °C |  |

| Obchodní údaje       |  |               |
|----------------------|--|---------------|
| eCl@ss 10.0          |  | 27-44-06-92   |
| eCl@ss 9.0           |  | 27-44-06-92   |
| ETIM 9.0             |  | EC002863      |
| ETIM 8.0             |  | EC002863      |
| PU (SPU)             |  | 50 ks         |
| Druh balení          |  | Sáček         |
| Země původu          |  | DE            |
| GTIN                 |  | 4055143508162 |
| Číslo celního tarifu |  | 85366990990   |

| Soulad produktů s ekologickými standardy |                         |
|------------------------------------------|-------------------------|
| RoHS Compliance Status                   | Compliant, No Exemption |

| Atesty/certifikáty |  |
|--------------------|--|
| General approvals  |  |



| Schválení                                  | Standardní | Název certifikátu |
|--------------------------------------------|------------|-------------------|
| cURus<br>Underwriters Laboratories<br>Inc. | UL 1059    | E 45172           |

| Ke stažení                               |  |
|------------------------------------------|--|
| Environmental Product Compliance         |  |
| Compliance Search                        |  |
| Environmental Product Compliance 770-354 |  |

| Documentation              |            |                 |  |
|----------------------------|------------|-----------------|--|
| Bid Text                   |            |                 |  |
| 770-354                    | 19.02.2019 | xml<br>2.53 KB  |  |
| 770-354                    | 13.04.2017 | doc<br>23.00 KB |  |
| ausschreiben.de<br>770-354 |            |                 |  |



CAD/CAE-Data

CAD data

2D/3D Models 770-354



Změny vyhrazeny. Berte prosím na vědomí také informace z produktové dokumentace!

Aktuální adresy najdete na: [www.wago.com](https://www.wago.com)