



AC Input: 100-240Vac  
(for DA2-Type only)

IS 15885(Part 2/Sec13)  
R-41027766  
( for 12,24,48  
Blank Type only)

cUL US  
E320521  
( for 12,24  
Blank Type only)

cUL US  
E334687  
Type HL  
( except for DA-Type)

IP67  
(CCC optional)  
DALI  
(for DA2-Type only)  
DALI  
(for DA-Type only)



## ■ Features

- Constant Voltage PWM style output
- Emergency lighting application is available according to IEC61347-2-13
- Built-in active PFC function and class II/2 design
- No load power consumption <0.5W
- Fully encapsulated with IP67 level
- Function: 3 in 1 dimming(dim-to-off); DALI/DALI-2
- Minimum dimming level 0.2% for DALI type
- Typical lifetime>50000 hours and 5 years warranty

## ■ Applications

- LED strip lighting
- Indoor LED lighting
- LED decorative lighting
- LED architecture lighting
- Industrial lighting
- Type "HL" for use in Class I, Division 2 hazardous (Classified) location.

## ■ GTIN CODE


MW Search: <https://www.meanwell.com/serviceGTIN.aspx>

## ■ Description

PWM-60 series is a 60W LED AC/DC LED driver featuring the constant voltage mode with PWM style output, which is able to maintain the brightness homogeneity when driving all kinds of LED strips.

PWM-60 operates from 90~305VAC and offers models with different rated voltage ranging between 12V and 48V. Thanks to the high efficiency up to 90%, with the fanless design, the entire series is able to operate for -40°C ~ +85°C case temperature under free air convection. The entire series is rated with IP67 ingress protection level and is suitable to work for dry, damp or wet locations. PWM-60 is equipped with dimming function that varies the duty cycle of the output, providing great flexibility for LED strips applications.

## ■ Model Encoding

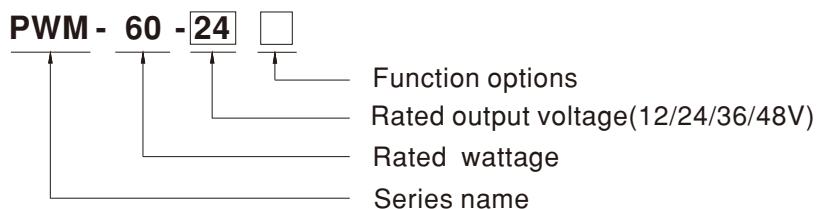


Type	IP Level	Function	Note
Blank	IP67	3 in 1 dimming function (0~10Vdc, 10V PWM signal and resistance)	In stock
DA	IP67	DALI control technology.(for 12V/24V with DA type only )	In stock
DA2	IP67	DALI-2 control technology.(for 12V/24V with DA2 type only )	In stock

## SPECIFICATION


MODEL	PWM-60-12□	PWM-60-24□	PWM-60-36□	PWM-60-48□
OUTPUT	<b>DC VOLTAGE</b>	12V	24V	36V
	<b>RATED CURRENT</b>	5A	2.5A	1.67A
	<b>RATED POWER</b>	60W	60W	60.12W
	<b>DIMMING RANGE</b>	0 ~ 100%		
	<b>PWM FREQUENCY (Typ.)</b>	1.47kHz for Blank/DA-Type, 2.5kHz for DA2-Type		
	<b>SETUP, RISE TIME</b> Note.2 <b>Note.9</b>	500ms, 80ms/ 115AC or 230VAC		
	<b>HOLD UP TIME (Typ.)</b>	16ms/115VAC or 230VAC		
INPUT	<b>VOLTAGE RANGE</b> Note.3	90 ~ 305VAC	127 ~ 431VDC (Please refer to "STATIC CHARACTERISTIC" section)	
	<b>FREQUENCY RANGE</b>	47 ~ 63Hz		
	<b>POWER FACTOR (Typ.)</b>	PF>0.97/115VAC, PF>0.95/230VAC, PF>0.92/277VAC @ full load (Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section)		
	<b>TOTAL HARMONIC DISTORTION</b>	THD< 20%(@load $\geq$ 60%/115VAC, 230VAC; @load $\geq$ 75%/277VAC) (Please refer to "TOTAL HARMONIC DISTORTION" section)		
	<b>EFFICIENCY (Typ.)</b>	86%	89%	90%
	<b>AC CURRENT (Typ.)</b>	0.8A / 115VAC	0.4A / 230VAC	0.32A / 277VAC
	<b>INRUSH CURRENT (Typ.)</b>	COLD START 50A(twidth=270 $\mu$ s measured at 50% Ipeak) at 230VAC; Per NEMA 410		
	<b>MAX. NO. of PSUs on 16A CIRCUIT BREAKER</b>	9 units (circuit breaker of type B) / 16 units (circuit breaker of type C) at 230VAC		
	<b>LEAKAGE CURRENT</b>	<0.25mA / 277VAC		
	<b>NO LOAD POWER CONSUMPTION</b>	<0.5W		
PROTECTION	<b>OVERLOAD</b>	108 ~ 130% rated output power Hiccup mode, recovers automatically after fault condition is removed		
	<b>SHORT CIRCUIT</b>	Shut down o/p voltage, re-power on to recover(except for DA2-type) Hiccup mode, recovers automatically after fault condition is removed (only for DA2-type)		
	<b>OVER VOLTAGE</b>	15 ~ 17V	28 ~ 34V	41 ~ 46V
		Shut down o/p voltage, re-power on to recover		
	<b>OVER TEMPERATURE</b>	Shut down o/p voltage, re-power on to recover		
ENVIRONMENT	<b>WORKING TEMP.</b>	Tcase=-40 ~ +85°C (Please refer to "OUTPUT LOAD vs TEMPERATURE" section)		
	<b>MAX. CASE TEMP.</b>	Tcase=+85°C		
	<b>WORKING HUMIDITY</b>	20 ~ 95% RH non-condensing		
	<b>STORAGE TEMP., HUMIDITY</b>	-40 ~ +80°C, 10 ~ 95% RH		
	<b>TEMP. COEFFICIENT</b>	$\pm 0.03\%/\text{°C}$ (0 ~ 50°C)		
	<b>VIBRATION</b>	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes		
SAFETY & EMC	<b>SAFETY STANDARDS</b> Note.5	UL8750( type "HL" )( except for DA-Type), UL879( for 12V,24V Blank Type only), CSA C22.2 No. 250.13-12; ENEC BS EN/EN61347-1, BS EN/EN61347-2-13 independent, BS EN/EN62384, IP67, BIS IS15885(for 12,24, 48 Blank Type only), EAC TP TC 004, GB19510.1,GB19510.14 approved; Design refer to BS EN/EN60335-1; According to BS EN/EN61347-2-13 appendix J suitable for emergency installations(EL)(AC Input: 100-240Vac)(for DA2-Type only)		
	<b>DALI STANDARDS</b>	IEC62386-101, 102, 207,251 for DA/DA2-Type only,Device type 6(DT6)		
	<b>WITHSTAND VOLTAGE</b>	I/P-O/P:3.75KVAC; I/P-DA:1.5KVAC; O/P-DA:1.5KVAC		
	<b>ISOLATION RESISTANCE</b>	I/P-O/P:100M Ohms / 500VDC / 25°C / 70% RH		
	<b>EMC EMISSION</b> Note.6	Compliance to BS EN/EN55015, BS EN/EN61000-3-2 Class C (@load $\geq$ 60%) ; BS EN/EN61000-3-3,GB/T 17743, GB17625.1;EAC TP TC 020		
	<b>EMC IMMUNITY</b>	Compliance to BS EN/EN61000-4-2,3,4,5,6,8,11; BS EN/EN61547, light industry level (surge immunity Line-Line 2KV),EAC TP TC 020		
OTHERS	<b>MTBF</b>	2626.6K hrs min. Telcordia SR-332 (Bellcore) ; 227.1K hrs min. MIL-HDBK-217F (25°C)		
	<b>DIMENSION</b>	150*53*35mm (L*W*H)		
	<b>PACKING</b>	0.49Kg;30pcs/15.7Kg/1.0CUFT		
<b>NOTE</b>	1. All parameters NOT specially mentioned are measured at 230VAC input, rated current and 25°C of ambient temperature. 2. De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details. 3. Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time. 4. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again. (as available on <a href="https://www.meanwell.com/Upload/PDF/EMI_statement_en.pdf">https://www.meanwell.com/Upload/PDF/EMI_statement_en.pdf</a> ) 5. This series meets the typical life expectancy of >50,000 hours of operation when Tcase, particularly $(t_c)$ point (or TMP, per DLC), is about 75°C or less. 6. Please refer to the warranty statement on MEAN WELL's website at <a href="http://www.meanwell.com">http://www.meanwell.com</a> 7. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft). 8. For any application note and IP water proof function installation caution, please refer our user manual before using. <a href="https://www.meanwell.com/Upload/PDF/LED_EN.pdf">https://www.meanwell.com/Upload/PDF/LED_EN.pdf</a> 9. Based on IEC 62386-101/102 DALI power on timing and interruption regulations, the set up time needs to test with a DALI controller which can support for DALI power on function, otherwise the set up time will be higher than 0.5 second for DA type. ✎ Product Liability Disclaimer : For detailed information, please refer to <a href="https://www.meanwell.com/serviceDisclaimer.aspx">https://www.meanwell.com/serviceDisclaimer.aspx</a>			

## ■ DIMMING OPERATION

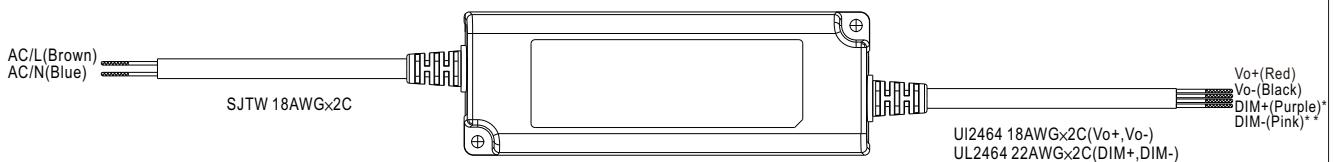

## ※ Dimming principle for PWM style output

- Dimming is achieved by varying the duty cycle of the output current.

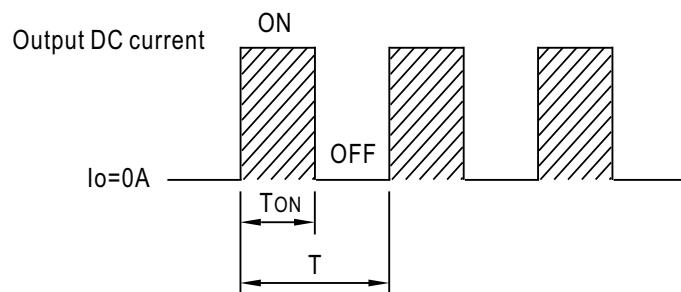

$$\text{Duty cycle}(\%) = \frac{TON}{T} \times 100\%$$

## Output PWM frequency :



1.47kHz for Blank/DA-Type fixed (Typ.)

2.5kHz for DA2-Type fixed (Typ.)



## ※ 3 in 1 dimming function (for Blank-Type)

- Apply one of the three methodologies between DIM+ and DIM-: 0 ~ 10VDC, or 10V PWM signal or resistance.
- Dimming source current from power supply: 100μA (typ.)



## ◎ Applying additive 0 ~ 10VDC

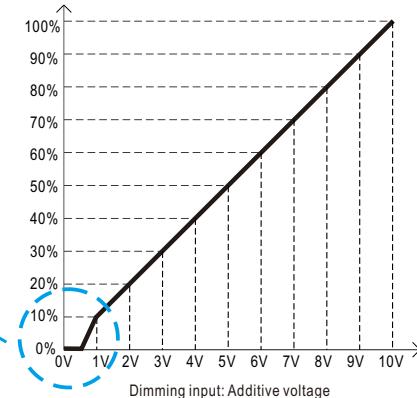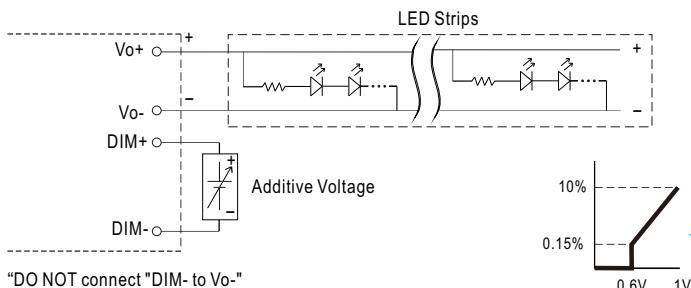

## ◎ Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):

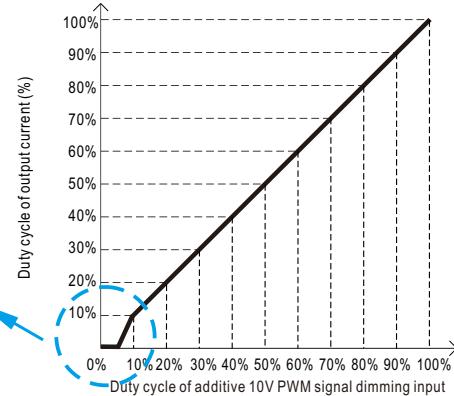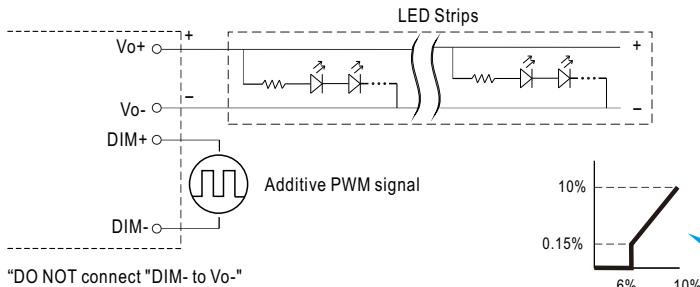

◎ Applying additive resistance:

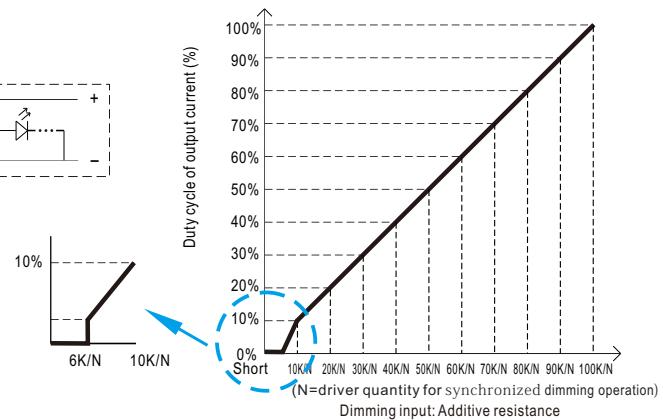
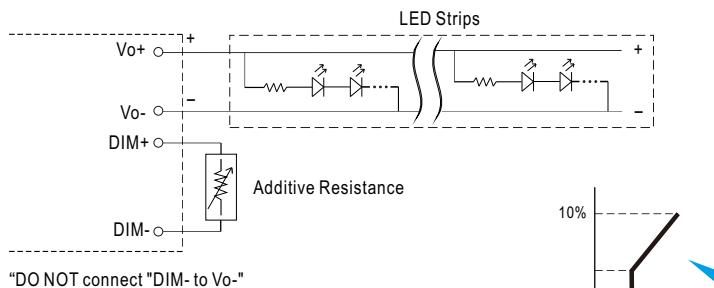


Note : 1. Min. duty cycle of output current is about 6% and the output current is not defined when  $0\% < I_{out} < 6\%$ .  
 2. The duty cycle of output current could drop down to 0% when dimming input is about  $0\text{k}\Omega$  or  $0\text{Vdc}$ , or  $10\text{V}$  PWM signal with 0% duty cycle.


※ DALI Interface (primary side; for DA/DA2-Type)

- Apply DALI signal between DA+ and DA-.
- DALI protocol comprises 16 groups and 64 addresses.
- First step is fixed at 0.2% of output

## ■ OUTPUT LOAD vs TEMPERATURE

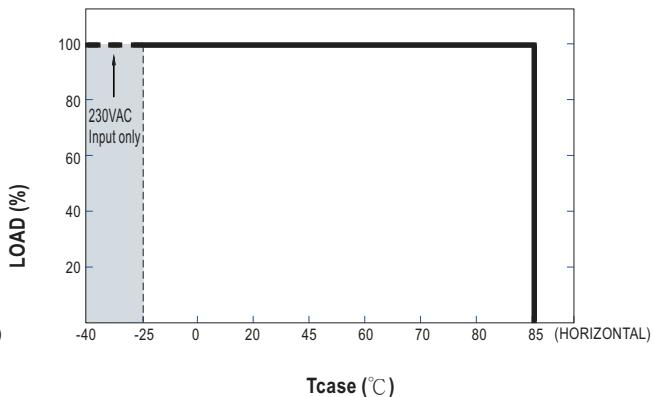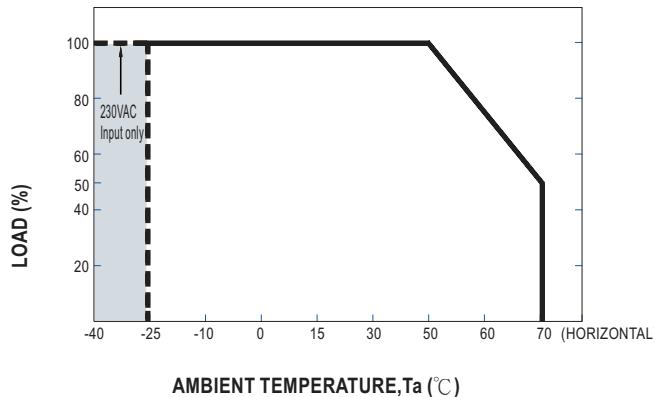


## ■ STATIC CHARACTERISTIC

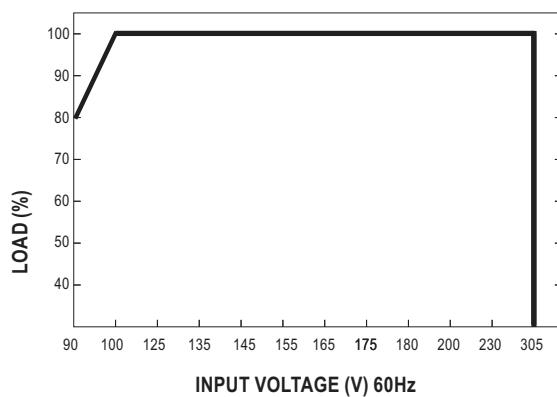


※ De-rating is needed under low input voltage.

## ■ POWER FACTOR (PF) CHARACTERISTIC

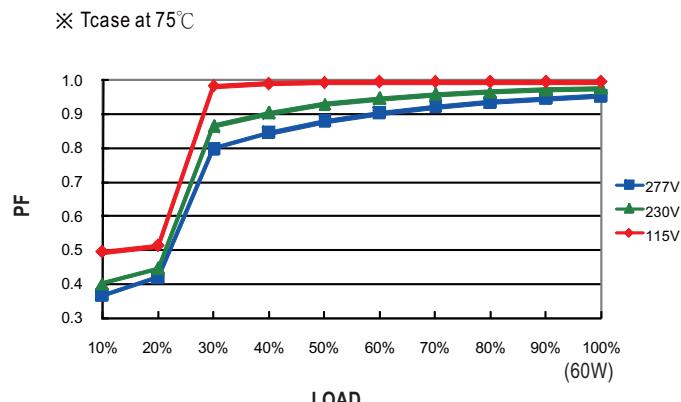

## ■ TOTAL HARMONIC DISTORTION (THD)


※ 48V Model,  $T_{case}$  at 75°C

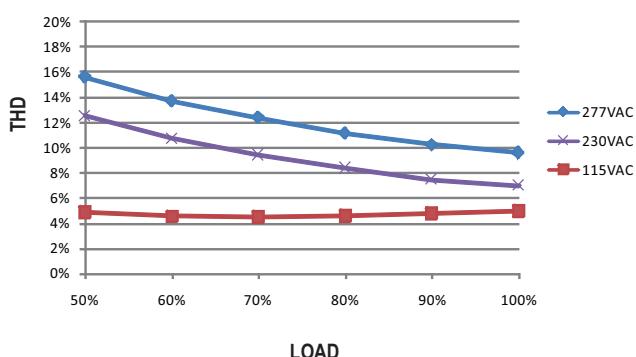


## ■ EFFICIENCY vs LOAD

PWM-60 series possess superior working efficiency that up to 90% can be reached in field applications.


※ 48V Model,  $T_{case}$  at 75°C

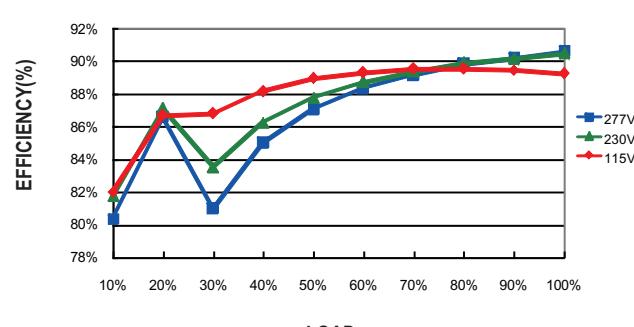

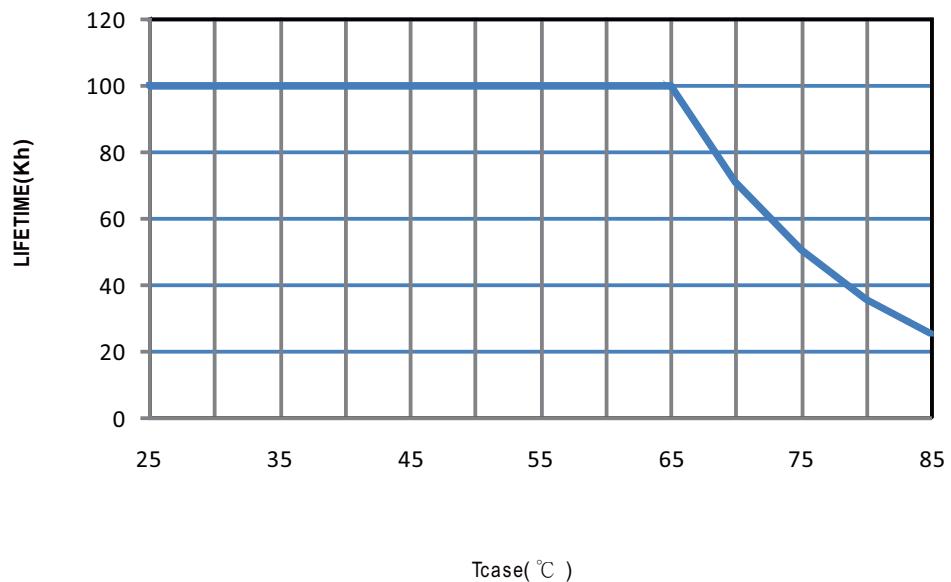**LIFE TIME**


Tcase( °C )

## ■ Block Diagram

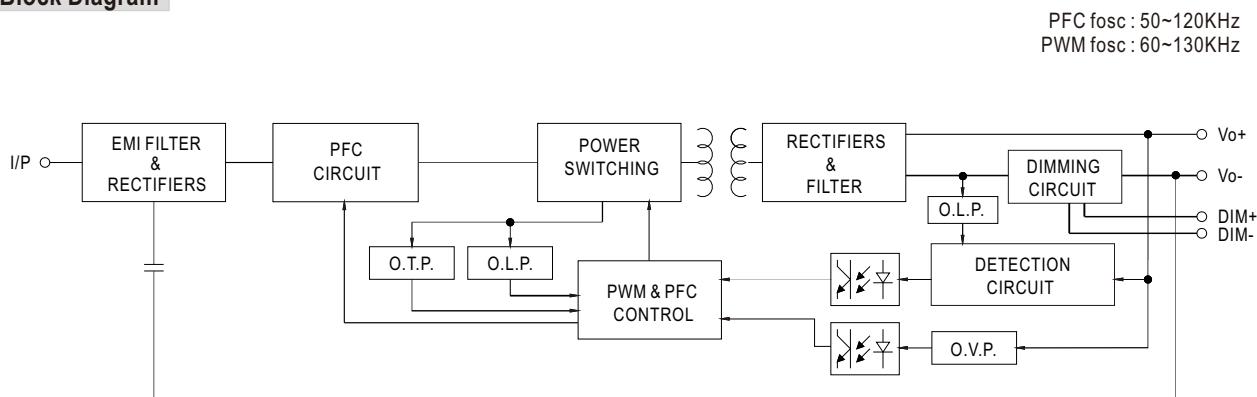



## ■ Mechanical Specification

Case No. NPF-60A      Unit:mm

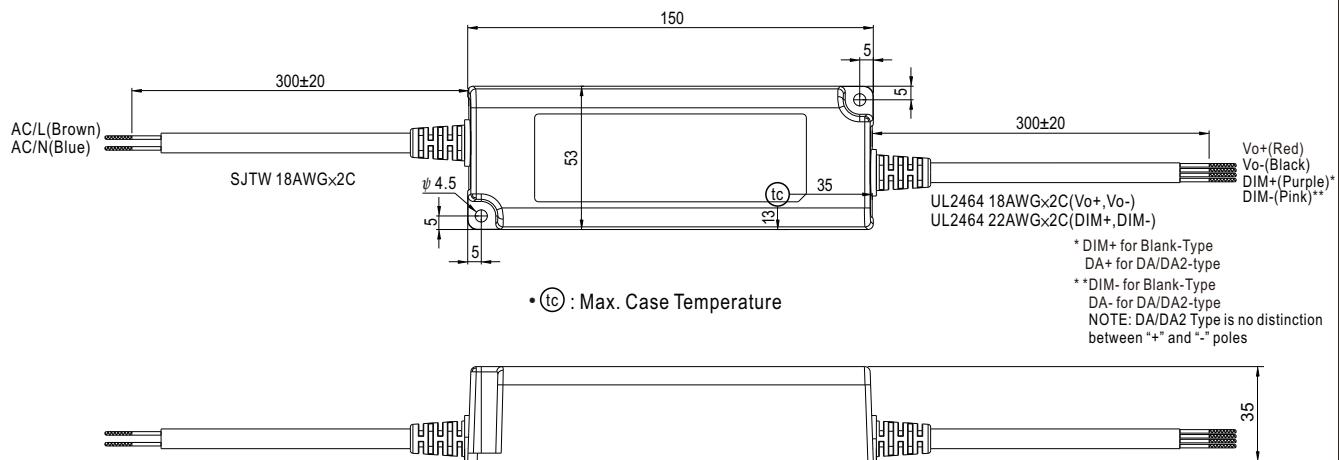

## ■ Recommend Mounting Direction

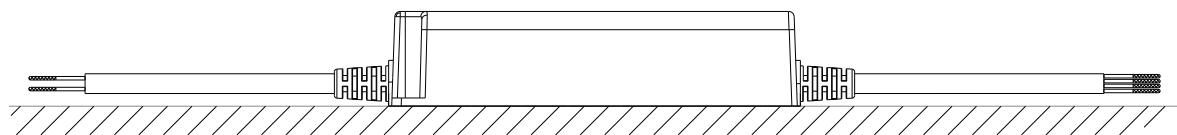

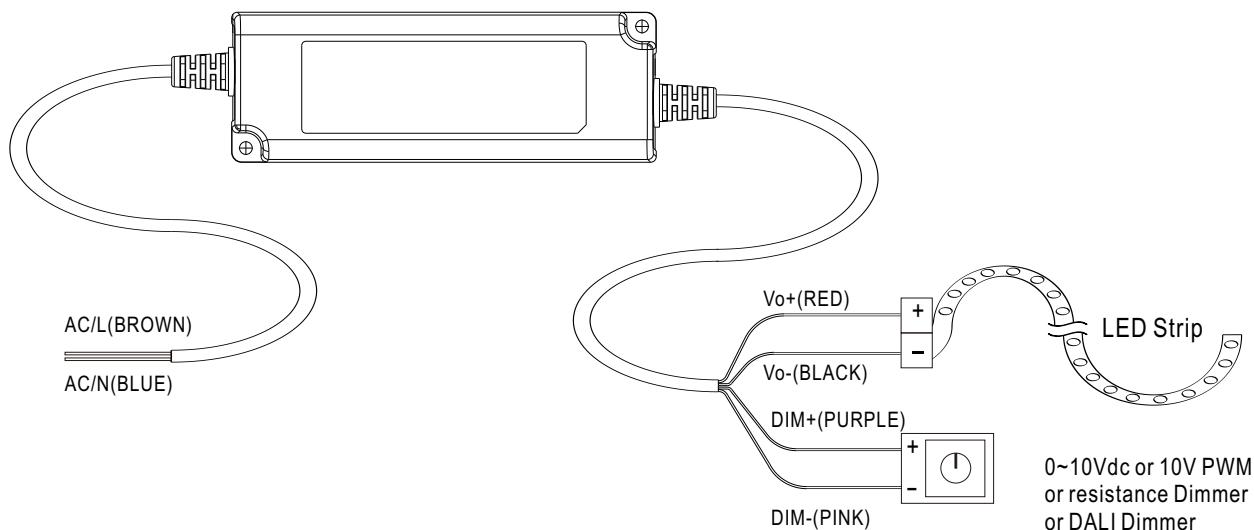**■ Installation Manual****◎Connection for Blank-type****◎Cautions**

- Before commencing any installation or maintenance work, please disconnect the power supply from the utility. Ensure that it cannot be re-connected inadvertently!
- Keep proper ventilation around the unit and do not stack any object on it. Also a 10-15 cm clearance must be kept when the adjacent device is a heat source.
- Mounting orientations other than standard orientation or operate under high ambient temperature may increase the internal component temperature and will require a de-rating in output current.
- Current rating of an approved primary /secondary cable should be greater than or equal to that of the unit. Please refer to its specification.
- For LED drivers with waterproof connectors, verify that the linkage between the unit and the lighting fixture is tight so that water cannot intrude into the system.
- For dimmable LED drivers, make sure that your dimming controller is capable of driving these units. PWM series require 0.15mA each unit.
- Tc max. is identified on the product label. Please make sure that temperature of Tc point will not exceed limit.
- DO NOT connect "DIM- to Vo-".
- Suitable for indoor use or outdoor use without direct sunlight exposure. Please avoid immerse in the water over 30 minutes.
- The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.