

## XACB125

nevybavený závěsný ovládač XAC-B - 12 otvorů ve 2 sloupcích



### Hlavní parametry

|                            |                 |
|----------------------------|-----------------|
| Řada výrobků               | Harmony XAC     |
| Typ produktu nebo součásti | Závěsný ovládač |
| Označení přístroje         | XACB            |

### Doplňěk

|                                     |                                                   |
|-------------------------------------|---------------------------------------------------|
| Typ ovladače                        | Dvojitě izolovaný                                 |
| Materiál rozvaděče                  | Polyester vyztužený sklem                         |
| Typ elektrického obvodu             | Ovládací obvod<br>Výkonový obvod                  |
| Typ rozvaděče                       | Prázdná skříň                                     |
| Počet výřezů                        | 12 výřezů ve 2 řadách                             |
| Barva ovladače                      | Žlutá                                             |
| Kabelová průchodka                  | Pryžový návlek s odstupňovaným vstupem 22...35 mm |
| Kryt lišty                          | Ne                                                |
| Svislý ovladač s vyříznutým středem | 40 mm                                             |
| Standardy                           | EN/IEC 60947-5-1<br>CSA C22.2 č. 14               |
| Certifikace výrobku                 | CSA typ 4                                         |
| Stupeň ochrany                      | TH                                                |
| Teplota okolního vzduchu pro provoz | -25...70 °C                                       |
| Teplota okolí pro uskladnění        | -40...70 °C                                       |
| Odolnost proti vibracím             | 15 gn 10...500 Hz IEC 60068-2-6                   |
| Odolnost proti otřesům              | 100 gn IEC 60068-2-27                             |
| Kategorie přepětí                   | Třída II IEC 61140                                |
| Stupeň krytí IP                     | IP65 IEC 60529                                    |
| Stupeň ochrany IK                   | IK08 EN 50102                                     |
| Mechanická životnost                | 1000000 cykly                                     |
| Hmotnost přístroje                  | 1,66 kg                                           |


### Životní prostředí

### Contractual warranty

|               |           |
|---------------|-----------|
| Záruční lhůta | 18 měsíců |
|---------------|-----------|

### Dimensions

Below drawing shows a product with 12 cut-outs. Select the number of cut-outs according to the product characteristics in order to get b, b1 and c dimensions.

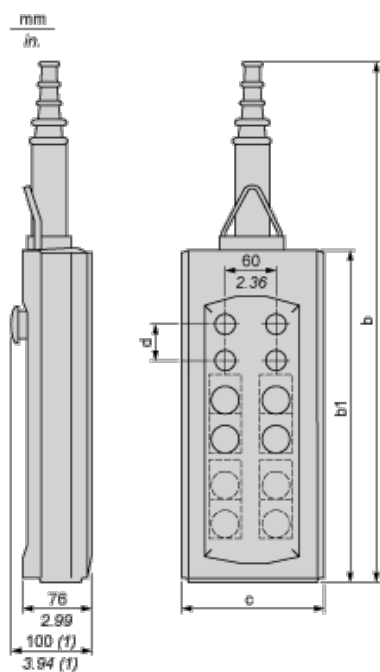


Dimensions in mm

| Number of cut-outs | 2   | 4   | 6   | 8   | 12  |
|--------------------|-----|-----|-----|-----|-----|
| b                  | 409 | 499 | 589 | 679 | 593 |
| b1                 | 220 | 310 | 400 | 490 | 404 |
| c                  | 98  | 98  | 98  | 98  | 158 |
| d                  | 40  | 40  | 40  | 40  | 40  |

Dimensions in in.

| Number of cut-outs | 2     | 4     | 6     | 8     | 12    |
|--------------------|-------|-------|-------|-------|-------|
| b                  | 16.10 | 19.64 | 23.19 | 26.73 | 23.35 |
| b1                 | 8.66  | 12.20 | 15.75 | 19.29 | 15.90 |
| c                  | 3.86  | 3.86  | 3.86  | 3.86  | 6.22  |
| d                  | 1.57  | 1.57  | 1.57  | 1.57  | 1.57  |


Protective cable sleeves

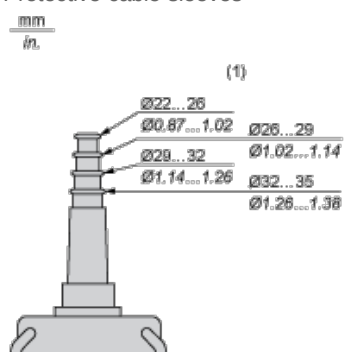

(1) Internal Ø


## Control of Single-Speed Reversing Motor

With XESD1181 contact block, to be ordered separately

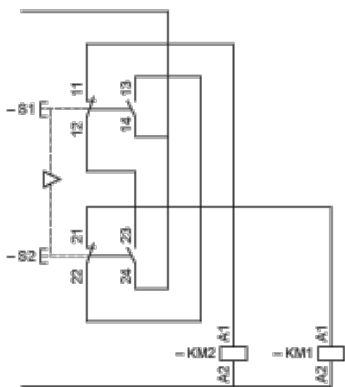

## Control of 2-Speed Reversing Motor


With XESD1281 contact block, to be ordered separately

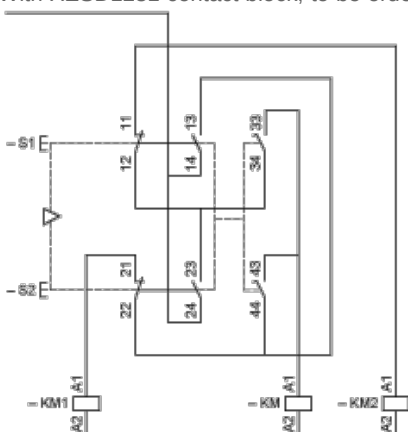


KM High speed contactor

## Control of Single-Speed Reversing Motor 2-Phase Switching

With XESD1191 contact block, to be ordered separately

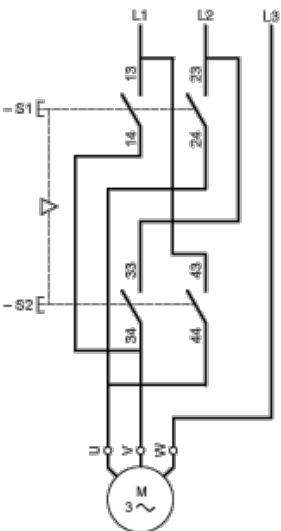


Combined with 3-pole isolating block XACS399 or XACS3991, shown in the unoperated position (pendant station "supplied"), fitted with key release trigger action latching Emergency stop operator.

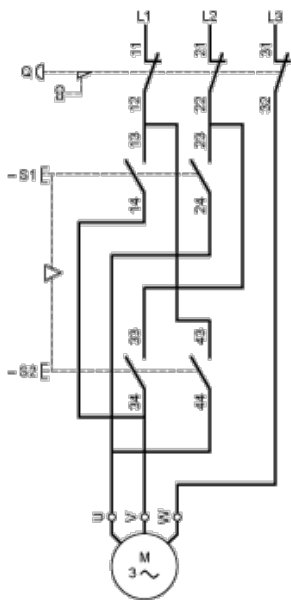


### Control of 2-Speed Reversing Motor 2-Phase Switching

With XESD1291 contact block, to be ordered separately

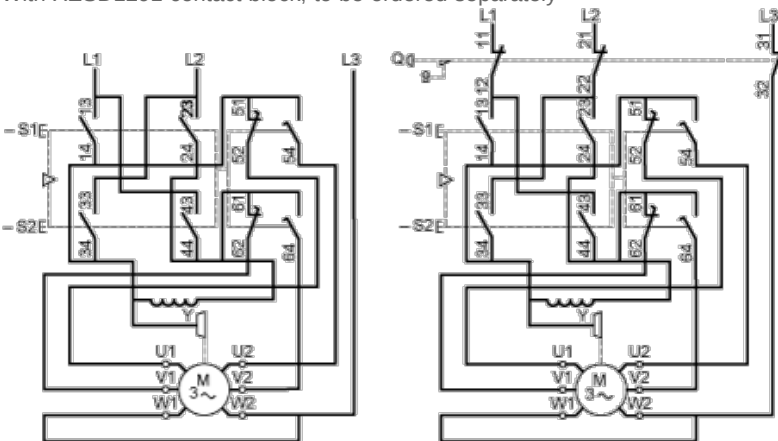

### Control of Single-Speed Reversing Motor 3-Phase switching, Reversing by 2-Phase Inversion

With XESD2201 contact block, to be ordered separately

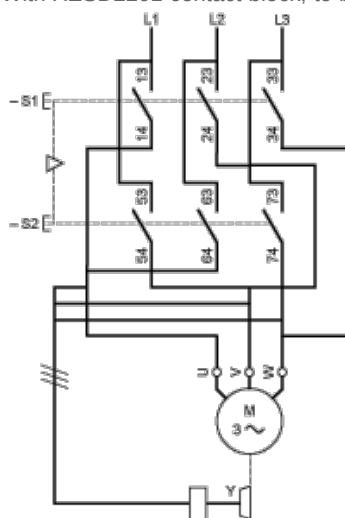

### Control of Single-Speed Reversing Motor 3-Phase switching, Reversing by 2-Phase Inversion

With XESD2241 contact block, to be ordered separately

