


ENDURA® STYLE

ROBUST WALL



	EAN	W	lm light source	lm output	K	° (°C)	V~	mA	Hz	DF	◊ (°)	
ENDURA STY ROBUST W IP54 DG	4099854415739	12	1450	1000	3000	-20...+40	220- 240	65	50/60	>0.7	90	>100000
ENDURA STY ROBUST W S IP54 DG	4099854415753	12.5	1450	1000	3000	-20...+40	220- 240	70	50/60	>0.7	90	>100000

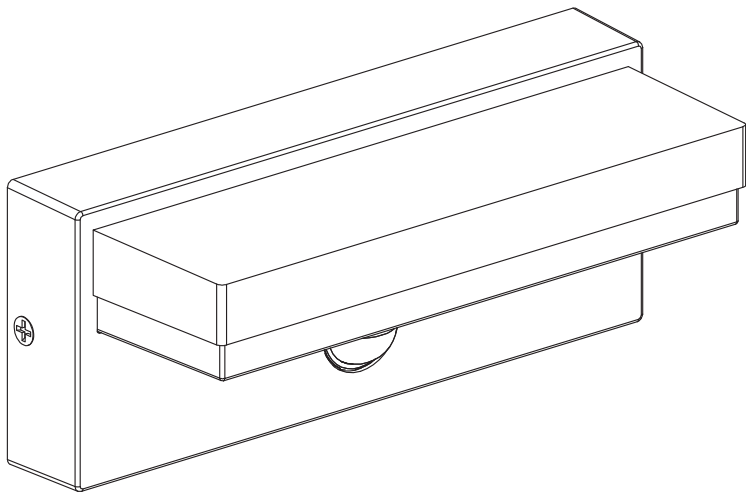