



## ■ Features

- Extreme small and space-saving, takes up one spot on power strip
- Universal AC input / Full range
- 2 pole EURO plug, Class II power unit
- No load power consumption<0.075W
- **Energy efficiency Level VI**
- Comply with EU ErP and meet CoC Version 5
- Protections: Short circuit / Overload / Over voltage
- Fully enclosed plastic case
- Pass LPS
- 7.5V / 18V / 48V models available (by request)
- **Various DC plug quick adapter accessory available**  
(Plug kit sold separately, please refer to : [https://www.meanwell.com/upload/pdf/DC\\_plug.pdf](https://www.meanwell.com/upload/pdf/DC_plug.pdf))
- 3 years warranty

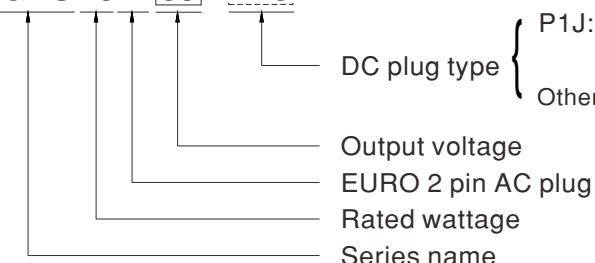
## ■ Description

SGAS15E is a 15W compact size highly reliable wall-mounted style single-output green adaptor series, which is compact and convenient for carry. SGAS15E is a class II power unit (no FG) equipped with the standard 2-Pin European plug, accepting the input range from 90VAC to 264VAC. The whole series provides different models with output voltages ranging between 5VDC and 24VDC that it can satisfy the demands for various types of consumer electronic devices.

With the efficiency up to 86% and the extremely low no-load power consumption below 0.075W, SGAS15E is compliant with EU ErP and meet CoC version 5. The supreme feature allows the adaptor to save the energy when it is under either the operating mode or the standby mode. The entire series is approved for international safety regulations; moreover, it adopts the 94V-0 flame retardant plastic case that it can effectively prevent users from electric hazards.

## ■ Model Encoding

**SGAS15E 05 - P1J**



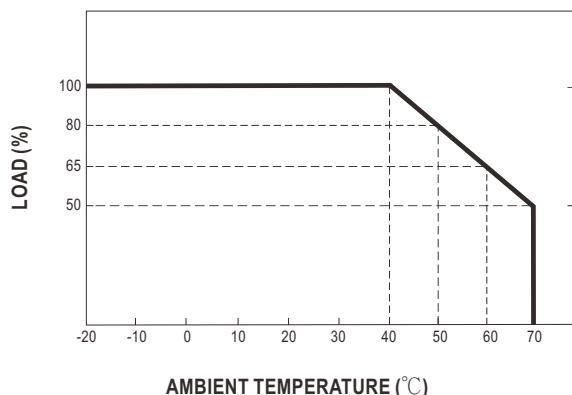
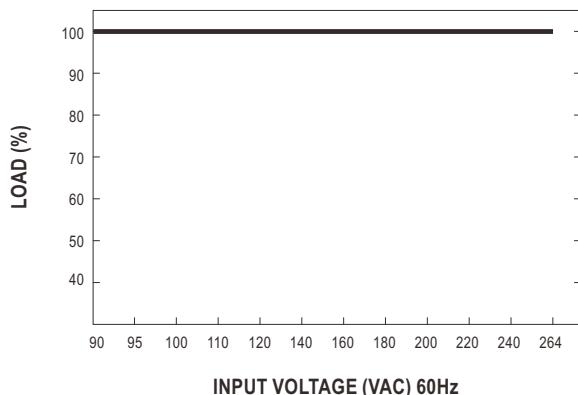
P1J: Plug for standard model,  $2.1\psi \times 5.5\psi \times 11\text{mm}$ ,  
C+ tuning fork type  
Other options available by customer requested (see Page 4~5)



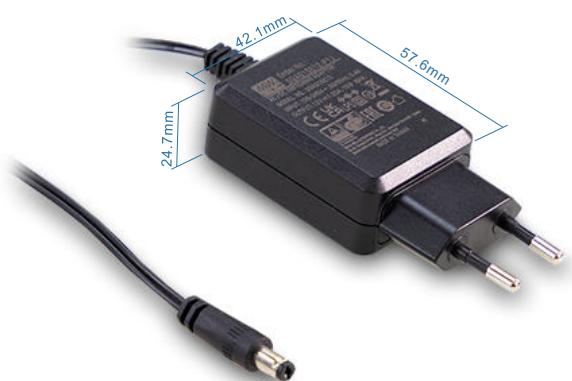
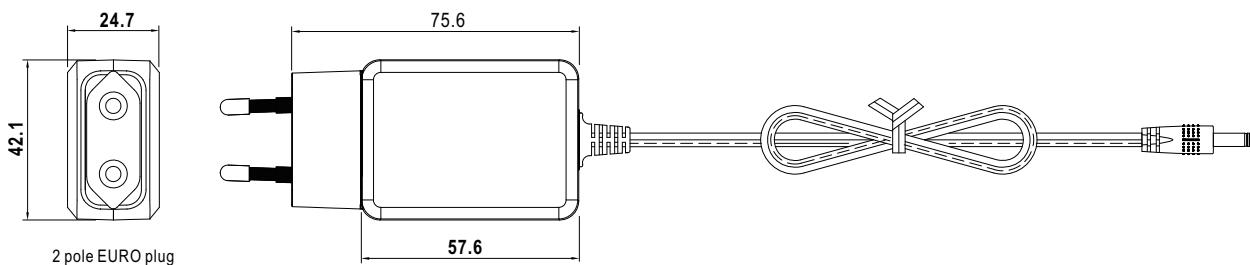
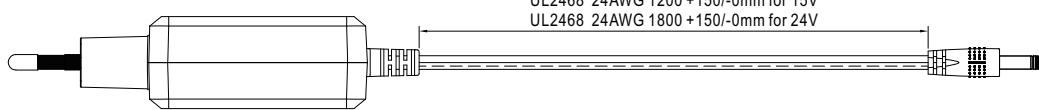
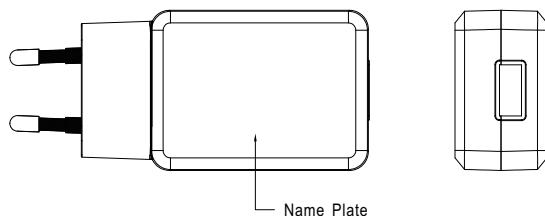
15W AC-DC High Reliable Extreme Small Wall-mounted Industrial Adaptor

**SGAS15E** series**SPECIFICATION**

ORDER NO.	SGAS15E05-P1J	SGAS15E09-P1J	SGAS15E12-P1J	SGAS15E15-P1J	SGAS15E24-P1J		
OUTPUT	SAFETY MODEL NO.	SGAS15E05	SGAS15E09	SGAS15E12	SGAS15E15		
	DC VOLTAGE Note.2	5V	9V	12V	15V		
	RATED CURRENT	2.40A	1.66A	1.25A	1.00A		
	CURRENT RANGE	0 ~ 2.40A	0 ~ 1.66A	0 ~ 1.25A	0 ~ 1.00A		
	RATED POWER	12W	15W	15W	15W		
	RIPPLE & NOISE (max.) Note.3	80mVp-p	80mVp-p	80mVp-p	100mVp-p		
	VOLTAGE TOLERANCE Note.4	±5.0%	±5.0%	±3.0%	±3.0%		
	LINE REGULATION Note.5	±0.5%	±0.5%	±0.5%	±0.5%		
INPUT	LOAD REGULATION Note.6	±5.0%	±5.0%	±3.0%	±2.0%		
	SETUP, RISE, HOLD UP TIME	3000ms, 50ms, 10ms at full load					
PROTECTION	VOLTAGE RANGE	90 ~ 264VAC 127 ~ 370VDC					
	FREQUENCY RANGE	47 ~ 63Hz					
	EFFICIENCY (Typ.)	79%	84%	85%	85%		
	AC CURRENT	0.4A / 100VAC					
	INRUSH CURRENT (max.)	Cold start 30A/ 115VAC 50A / 230VAC					
ENVIRONMENT	LEAKAGE CURRENT(max.)	0.25mA / 240VAC					
	OVERLOAD	105 ~ 250% rated output power Protection type : Hiccup mode, recovers automatically after fault condition is removed					
	OVER VOLTAGE	>120% rated output voltage Protection type : Clamp by zener diode					
	WORKING TEMP.	-20 ~ +70°C (Refer to "Derating Curve")					
	WORKING HUMIDITY	20% ~ 90% RH non-condensing					
SAFETY & EMC (Note. 7)	STORAGE TEMP., HUMIDITY	-20 ~ +85°C, 10 ~ 95% RH non-condensing					
	TEMP. COEFFICIENT	±0.03% / °C (0 ~ 40°C)					
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes					
	SAFETY STANDARDS	TUV BS EN/EN62368-1 approved					
	WITHSTAND VOLTAGE	I/P-O/P:3KVAC					
	ISOLATION RESISTANCE	I/P-O/P:100M Ohms / 500VDC / 25°C / 70% RH					
	EMC EMISSION	Parameter	Standard	Test Level / Note			
		Conducted emission	BS EN/EN55032(CISPR32)	Class B			
		Radiated emission	BS EN/EN55032(CISPR32)	Class B			
		Harmonic current	BS EN/EN61000-3-2	Class A			
	EMC IMMUNITY	Voltage flicker	BS EN/EN61000-3-3	-----			
		Parameter	Standard	Test Level / Note			
		ESD	BS EN/EN61000-4-2	Level 3, 8KV air; Level 2, 4KV contact			
		RF field susceptibility	BS EN/EN61000-4-3	Level 2, 3V/m			
		EFT bursts	BS EN/EN61000-4-4	Level 2, 1KV			
		Surge susceptibility	BS EN/EN61000-4-5	Level 3, 1KV/L-N			
		Conducted susceptibility	BS EN/EN61000-4-6	Level 2, 3V			
		Magnetic field immunity	BS EN/EN61000-4-8	Level 1, 1A/m			
	Voltage dips , interruption		BS EN/EN61000-4-11	>95% dip 0. 5 periods, 30% dip 25 periods, >95% interruptions 250 periods			
OTHERS	LIFE	3 years : 100% load 40°C, 12hours / day					
	MTBF	507Khrs min. MIL-HDBK-217F(25°C)					
CONNECTOR	DIMENSION	57.6*42.1*24.7mm (L*W*H)					
	PACKING	130g ; 72pcs / 11Kg / CARTON					
NOTE	PLUG	See page 4~5 ; Other type available by customer requested					
	CABLE	See page 4~5 ; Other type available by customer requested					
1.All parameters are specified at 230VAC input, rated load, 25°C 70% RH ambient. 2.DC voltage: The output voltage set at point measure by plug terminal & 50% load. 3.Ripple & noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1µF & 47µF capacitor. 4.Tolerance: includes set up tolerance, line regulation, load regulation. 5.Line regulation is measured from low line to high line at rated load. 6.Load regulation is measured from 0% to 100% rated load. 7.The power supply is considered as an independent unit, but the final equipment still need to re-confirm that the whole system complies with the EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on <a href="http://www.meanwell.com">http://www.meanwell.com</a> )							
※ Product Liability Disclaimer : For detailed information, please refer to <a href="https://www.meanwell.com/serviceDisclaimer.aspx">https://www.meanwell.com/serviceDisclaimer.aspx</a>							

**■ Derating Curve**

**■ Static Characteristics**

**■ Mechanical Specification**

Unit:mm



**■ DC output plug**

- ◎ Standard plug: P1J

Unit:mm

P1J	Pin Assignment
 	 Outside   - - - + + + Inside

- ◎ DC plug changeable through:



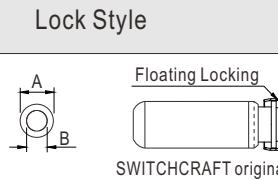
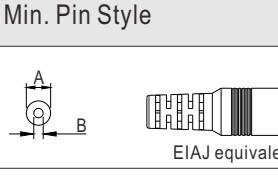
- (1) Customization of the standard part with an optional DC plug according to the table (MOQ applicable)
- (2) Quick adapter accessory (sold separately without MOQ)




Please refer to below table and online selection guide : [https://www.meanwell.com/upload/pdf/DC\\_plug.pdf](https://www.meanwell.com/upload/pdf/DC_plug.pdf)

Example quick adapter accessory:



- ◎ Optional DC plug: (Available in customized cable or quick adapter)

Tuning Fork Style	Type No.	A	B	C	Quick Adapter Accessory
		OD	ID	L	
 	P1I	5.5	2.1	9.5	Available (Current rating: 7.5A max.)
	P1L	5.5	2.5	9.5	
	P1M	5.5	2.5	11.0	
	P1IR	5.5	2.1	9.5	
	P1JR	5.5	2.1	11.0	
	P1LR	5.5	2.5	9.5	
	P1MR	5.5	2.5	11.0	
Barrel Style		Type No.	A	C	None
 	Type No.	A	B	C	
		OD	ID	L	
	P2I	5.5	2.1	9.5	
	P2J	5.5	2.1	11.0	
	P2L	5.5	2.5	9.5	
	P2M	5.5	2.5	11.0	
	P2IR	5.5	2.1	9.5	
	P2JR	5.5	2.1	11.0	
Lock Style		Type No.	A	C	None
 	Type No.	A	B	C	
		OD	ID	L	
	P2S(S761K)	5.53	2.03	12.06	
	P2K(761K)	5.53	2.54	12.06	
Min. Pin Style		Type No.	A	C	Available (Current rating: 5A max.)
 	Type No.	A	B	C	
		OD	ID	L	
	P3A	2.35	0.7	11.0	
	P3B	4.0	1.7	11.0	
	P3C	4.75	1.7	11.0	

Center Pin Style	Type No.	A	B	C	D	Quick Adapter Accessory	
		OD	ID	L	Center Pin		
	P4A	5.5	3.4	11.0	1.0	Available (Current rating: 7.5A max.)	
	P4B	6.5	4.4	11.0	1.4		
	P4C	7.4	5.1	11.0	0.6		
Min. DIN 3 Pin with Lock (male)	Type No.	Pin Assignment				Available (Current rating: 7.5A max.)	
		PIN No.		Output			
		1		+Vo			
	R6B	2		-Vo		Available (Current rating: 7.5A max.)	
		3		+Vo			
Min. DIN 4 Pin with Lock (male)		Pin Assignment					
	R7B	PIN No.		Output		Available (Current rating: 7.5A max.)	
		1		+Vo			
		2		-Vo			
		3		-Vo			
		4		+Vo			
Min. DIN 4 Pin with Lock (female)	R7BF	Pin Assignment				None	
		PIN No.		Output			
		1		+Vo			
		2		-Vo			
		3		-Vo			
		4		+Vo			
Stripped and tinned leads	by customer	Pin Assignment				None	
		PIN No.		Output			
		1 ( White )		+Vo			
Length of Land L1 by request (MW's standard length, L: <u>25</u> mm, L1: <u>10</u> mm)		2 ( Black )		-Vo			

### ■ Installation Manual

Please refer to : <http://www.meanwell.com/manual.html>