



■ Features :


- 2:1 wide input range
- 1500VDC I/O isolation
- Built-in remote ON/OFF control
- Built-in EMI filter
- Protections: Short circuit / Overload
- Cooling by free air convection
- Five-sided shield metal case
- 100% full load burn-in test
- Low cost / High reliability
- 2 years warranty



SPECIFICATION

■ Mechanical Specification


Unit:mm(inch)

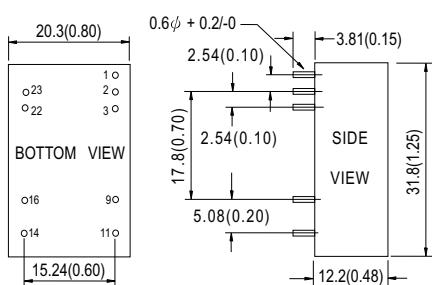

■ Pin Configuration

| Pin No. | Output |
|---------|--------|
| 1 | R.C. |
| 2 & 3 | -Vin |
| 9 | COM |
| 11 | -Vout |
| 14 | +Vout |
| 16 | COM |
| 22 & 23 | +Vin |

■ Derating Curve

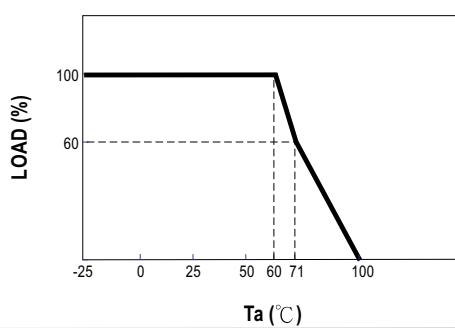

| | Ta (°C) |
|-------------|---|
| NOTE | 1.All parameters are specified at normal input, rated load, 25°C 70% RH ambient. 2.Ripple & noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1uf & 47uf capacitor. 3.Line regulation is measured from low line to high line at rated load. 4.Load regulation is measured from 20% to 100% rated load. 5.Please prevent the converter from operating in overload or short circuit condition for more than 30 seconds. |