



■ Features

- **250~ 1500Vdc** 6:1 ultra-wide input range
- Withstand 1700Vdc surge input for 10 seconds
- 4KVac I/O high isolation(Reinforced isolation)
- Protections: Short circuit / Overload / Over voltage / Over temperature
DC input under voltage / DC input reverse polarity
- **Fanless design**, half encapsulated, cooling by free air convection
- **-40~+80°C** ultra-wide operating temperature (> +55°C derating)
- Over voltage category II
- Operating altitude up to 5000 meters
- DC output voltage adjustable(12~15V, 24~29V, 30~36V, 48~58V)
- 1U low profile 41mm
- 3 years warranty

■ Applications

- Photovoltaic power generation
- Renewable Energy System
- High voltage frequency conversion
- Industrial control system
- Semiconductor fabrication equipment
- Electro-mechanical apparatus
- DC bus centralized application
- Energy storage system(ESS)
- Charging pile
- Third rail

■ GTIN CODE

MW Search: <https://www.meanwell.com/serviceGTIN.aspx>


■ Description

RSDH-150 series is a 250 ~ 1500Vdc ultra-high input enclosed type DC-DC converter which can supply stable working voltage for the load. Main features are as following: -40~+80°C wide range operating temperature, 4KVac high isolation voltage, operation at 5000m altitude, high efficiency, low ripple & noise, complete protections and so on.

RSDH-150 is compliant with BS EN/EN-61000-6-2 standard regarding immunity for industrial environments. It is suitable for industrial automation, surveillance, telecommunication and can be widely deployed in the applications of new energy generation such as solar power, and windmill power generation, for instances, photovoltaic power systems, high voltage inverting, DC bus centralized application, ESS, charging pile, railway and so forth.

■ Model Encoding


RSDH - 150 - 24

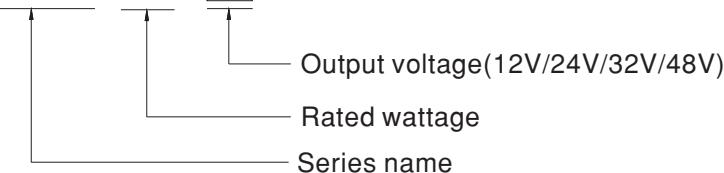


SPECIFICATION

MODEL	RSDH-150-12	RSDH-150-24	RSDH-150-32	RSDH-150-48			
OUTPUT	DC VOLTAGE	12V	24V	32V			
	RATED CURRENT	10A	6.2A	4.68A			
	CURRENT RANGE	0 ~ 10A	0 ~ 6.2A	0 ~ 4.68A			
	RATED POWER	120W	150W	150W			
	RIPPLE & NOISE (max.) Note.2	120mVp-p	240mVp-p	240mVp-p			
	VOLTAGE ADJ. RANGE	12 ~ 15V	24 ~ 29V	30 ~ 36V			
	VOLTAGE TOLERANCE Note.3	±1.5%	±1.0%	±1.0%			
	LINE REGULATION	±0.5%	±0.5%	±0.5%			
	LOAD REGULATION	±1.5%	±1.5%	±1.0%			
INPUT	EXTERNAL CAPACITANCE LOAD (Max.)	4000 μ F	2500 μ F	2000 μ F			
	VOLTAGE RANGE Note.4	250 ~ 1500Vdc					
	EFFICIENCY (Typ.)	300Vdc	88%	88%			
		800Vdc	88%	91%			
		1500Vdc	85%	87%			
	INRUSH CURRENT (max.)	COLD START 300A/1500Vdc 200A/800Vdc 70A/250Vdc					
	EXTERNAL INPUT FUSE	4A/1500VDC, required (Please refer to page 4 for more details)					
	OVERLOAD	105 ~ 135% rated output power					
		Protection type : Hiccup mode when output voltage < 55%, recovers automatically after condition is removed; Constant current limiting, recovers automatically after fault condition is removed within 55% ~ 100% rated output voltage					
PROTECTION	OVER VOLTAGE	16.5 ~ 21V	33 ~ 42V	40 ~ 48V			
	Protection type : Hiccup mode, recovers automatically after fault condition is removed						
	OVER TEMPERATURE	Protection type : Hiccup mode, recovers automatically after fault condition is removed					
	DC INPUT	REVERSE POLARITY By internal Bridge Diode, no damage, recovers automatically after fault condition removed					
ENVIRONMENT	UNDER VOLTAGE LOCKOUT	Under voltage protection range: 200 ~ 225Vdc, Under voltage release range: 225 ~ 246.5Vdc					
	WORKING TEMP.	-40 ~ +80°C (Refer to "Derating Curve")					
	WORKING HUMIDITY	20 ~ 90% RH non-condensing					
	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH non-condensing					
	TEMP. COEFFICIENT	±0.03%/°C (0 ~ 55°C)					
	VIBRATION	Component: 10 ~ 500Hz, 3G 10min./1cycle, 60min. each along X, Y, Z axes; Mounting clip: Compliance to IEC60068-2-6					
	OPERATING ALTITUDE Note.5	5000m					
SAFETY & EMC (Note.6)	OVER VOLTAGE CATEGORY	OVC II 2000m; According to EN62109-1					
	SAFETY STANDARDS	IEC62109-1, BS EN/EN62109-1, EAC TP TC 004 approved; Design refer to UL1741 (By request)					
	WITHSTAND VOLTAGE	I/P-O/P:4KVAC	I/P-FG:2KVAC	O/P-FG:2KVAC			
	ISOLATION RESISTANCE	I/P-O/P, 100M Ohms / 500VDC / 25°C / 70% RH					
	EMC EMISSION	Parameter	Standard	Test Level / Note			
		Conducted	BS EN/EN55032(CISPR32)	Class A			
		Radiated	BS EN/EN55032(CISPR32)	Class A			
	EMC IMMUNITY	BS EN/EN55035, BS EN/EN61000-6-2					
		Parameter	Standard	Test Level / Note			
		ESD	BS EN/EN61000-4-2	Level 3, 8KV air; Level 2, 4KV contact, criteria A			
		Radiated Susceptibility	BS EN/EN61000-4-3	Level 3, 10V, criteria A			
		EFT/Burst	BS EN/EN61000-4-4	Level 3, 2KV, criteria A			
		Surge	BS EN/EN61000-4-5	Level 4, 2KV/Vin+ ~ Vin-, 4KV Vin~FG			
		Conducted	BS EN/EN61000-4-6	Level 3, 10V, criteria A			
		Magnetic Field	BS EN/EN61000-4-8	Level 4, 30A, criteria A			
OTHERS	MTBF	1924.7K hrs min. Telcordia SR-332 (Bellcore); 285.9K hrs min. MIL-HDBK-217F (25°C)					
	DIMENSION	191*86*41mm (L*W*H)					
	PACKING	0.81Kg; 12pcs/10.7Kg/0.75CUFT					
NOTE	1. All parameters NOT specially mentioned are measured at 800Vdc input, rated load and 25°C of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1 μ F & 47 μ H parallel capacitor. 3. Tolerance : includes set up tolerance, line regulation and load regulation. 4. Derating may be needed under low input voltage. Please check the derating curve for more details. 5. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft). 6. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on http://www.meanwell.com)						
	※ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx						


■ Block Diagram

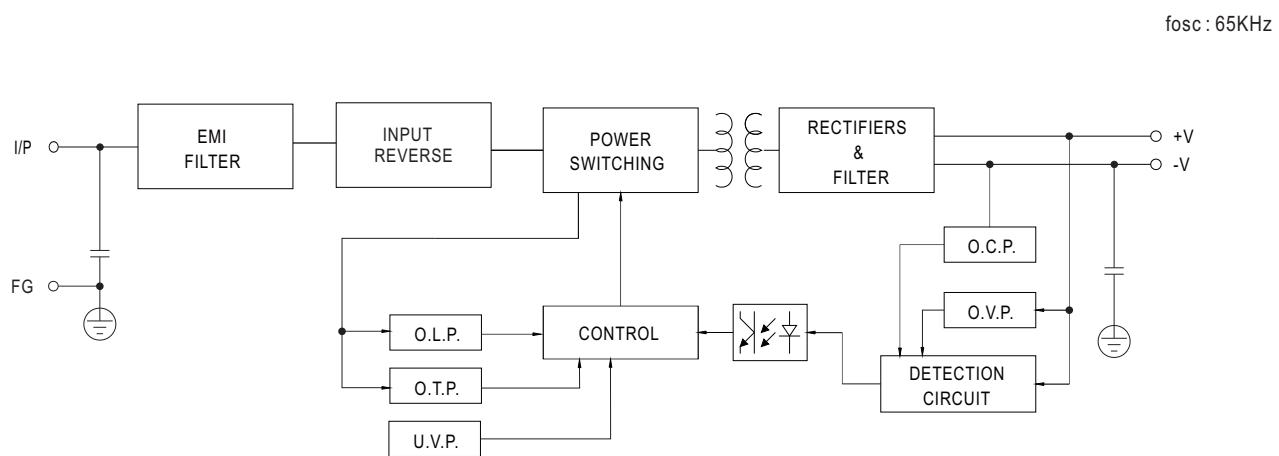


■ Derating Curve

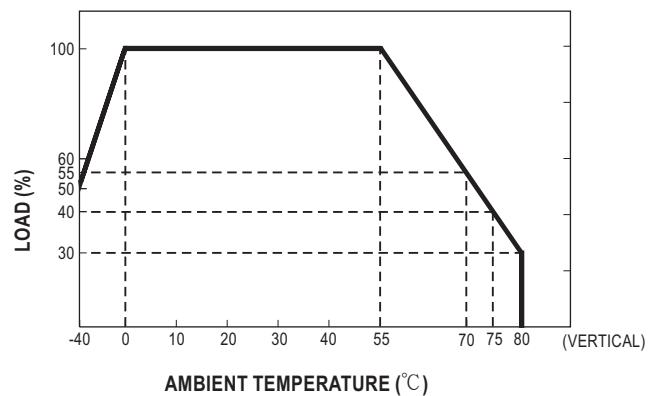

■ Static Characteristics

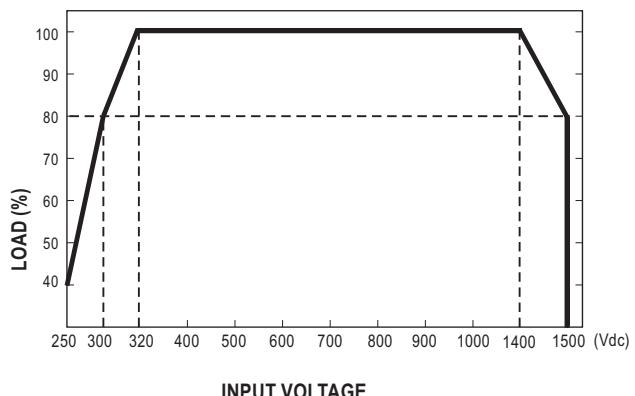


■ Altitude Curve

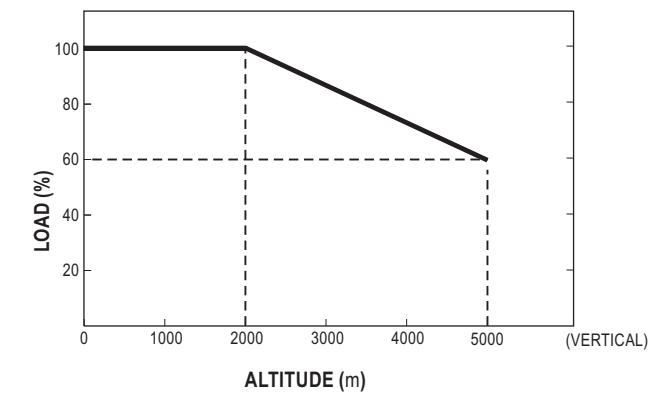

Note: Multiply by the regular power limit factor

■ Mechanical Specification

Case No.203B Unit:mm

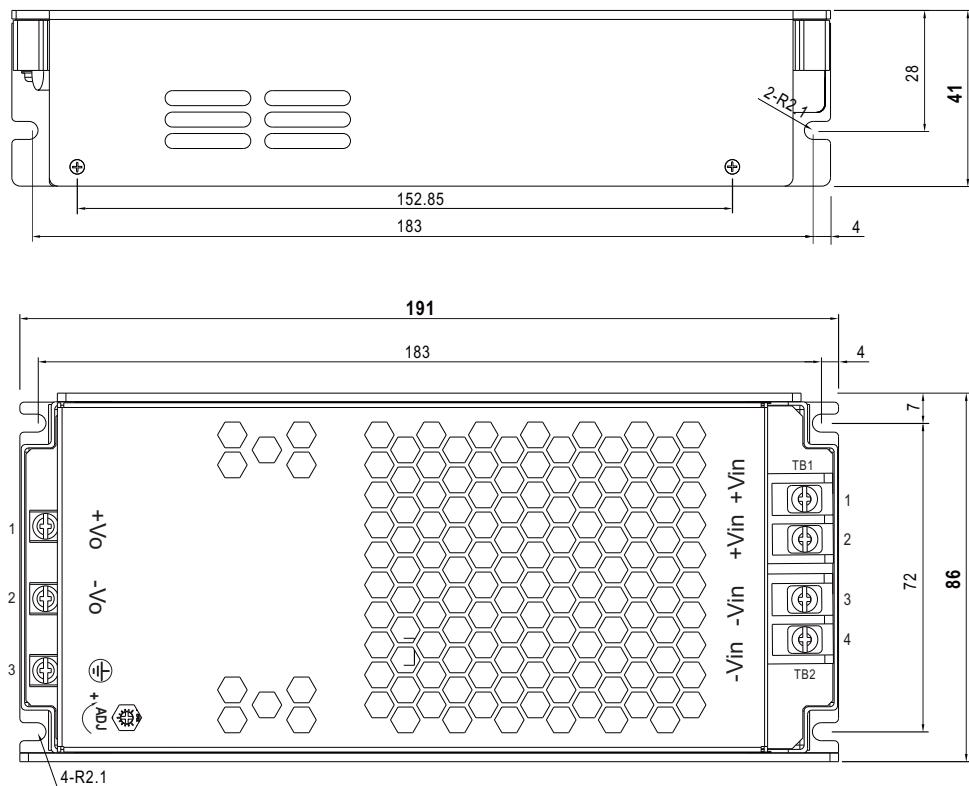

Output Terminal Pin No. Assignment

Pin No.	Assignment
1	+Vo
2	-Vo
3	FG

Input Terminal Pin No. Assignment (TB1,TB2)


Pin No.	Assignment
1	+Vin
2	+Vin
3	-Vin
4	-Vin

■ External FUSE wiring instruction

External FUSE is required. FUSE specification: 4A/1500Vdc.

Suggested model:

Fuse Brand	Manufacturer Part NO.		MW's Order NO.
	Fuse	Fuse Holder	
WalterFuse	WJ30-4	WJ30-H	DDRH-WJ30-4-H
Littelfuse	SPXV-4A	LFPXV/LPXV	Not provide
Bussmann	PV-4A10F85L	CHPV15L85	Not provide

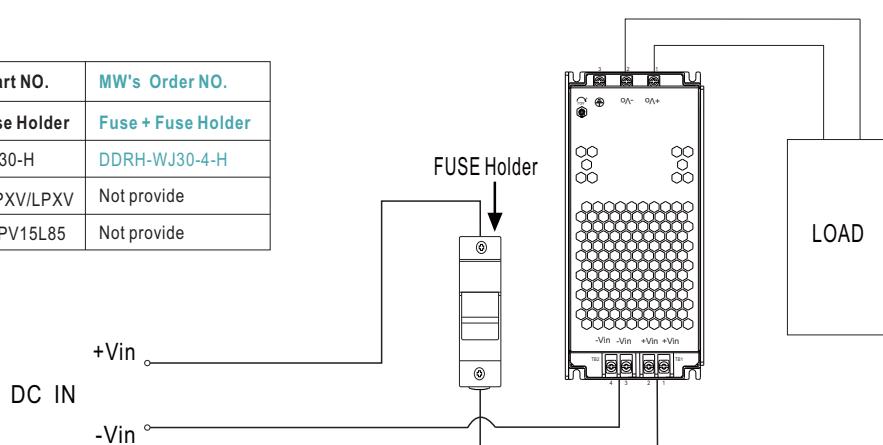

■ Installation Manual

Please refer to : <http://www.meanwell.com/manual.html>