




■ Features :

- Wide 4:1 DC input range
- Protections: Short circuit / Overload / Over voltage
- 1500VDC I/O isolation
- Built-in EMI filter
- Cooling by free air convection
- Output voltage trimming function
- Built-in remote ON-OFF control
- 100% full load burn-in test
- Low cost
- High reliability
- 2 years warranty




SPECIFICATION

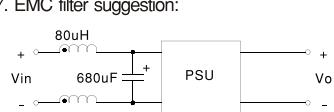MODEL	NSD15-12S3	NSD15-12S5	NSD15-12S12	NSD15-12S15	NSD15-48S3	NSD15-48S5	NSD15-48S12	NSD15-48S15				
OUTPUT	DC VOLTAGE	3.3V	5V	12V	15V	3.3V	5V	12V				
	RATED CURRENT	3.75A	3A	1.25A	1A	3.75A	3A	1.25A				
	CURRENT RANGE	0.18 ~ 3.75A	0.15 ~ 3A	0.06 ~ 1.25A	0.05 ~ 1A	0.18 ~ 3.75A	0.15 ~ 3A	0.06 ~ 1.25A				
	RATED POWER	12.375W	15W	15W	15W	12.375W	15W	15W				
	CAPACITIVE LOAD (max.)	3300uF										
	RIPPLE & NOISE (max.) Note.2	100mVp-p(25% ~ 100% load) for 3.3V only			75mVp-p(25% ~ 100% load)							
	VOLTAGE TOLERANCE Note.3	±2.0%										
	LINE REGULATION	±1.0% at 10% ~ 100% load										
	LOAD REGULATION	±1.0% at 10% ~ 100% load										
INPUT	TRIM OUTPUT (Typ.)	+10%	±5.0%	±5.0%	±3.0%	+10%	±5.0%	±5.0%				
	RATED DC INPUT	12VDC			48VDC							
	VOLTAGE RANGE	9.4 ~ 36VDC			18 ~ 72VDC							
	EFFICIENCY (Typ.)	73%	77%	81%	81%	77%	81%	84%				
	DC CURRENT	1.8A/12VDC			0.4A/48VDC							
PROTECTION	SHUTDOWN IDLE CURRENT	20mA										
	OVERLOAD	Above 105% rated output power Protection type : Over power limiting, recovers automatically after fault condition is removed										
	OVER VOLTAGE(CLAMP)	5.8 ~ 6.93V	5.8 ~ 7.5V	13.8 ~ 18V	17.25 ~ 22.5V	5.61 ~ 6.93V	5.5 ~ 7.5V	13.8 ~ 18V				
FUNCTION	SHORT CIRCUIT Note.4	Recovering automatically after fault condition is removed										
	ON/OFF CONTROL	Logic "1" or open circuit : ON Logic "0" or short to PIN2 : OFF										
ENVIRONMENT	WORKING TEMP.	-25 ~ +70°C										
	WORKING HUMIDITY	0% ~ 95% RH max.										
	STORAGE TEMP., HUMIDITY	-40 ~ +85°C, 0 ~ 95% RH										
	TEMP. COEFFICIENT	±0.03%/°C (0~50°C)										
SAFETY & EMC (Note 5)	SAFETY STANDARDS	UL60950-1 approved, Design refer to TUV EN60950-1										
	ISOLATION VOLTAGE	I/P-O/P:1.5KVDC										
	ISOLATION RESISTANCE	I/P-O/P:100M Ohms / 500VDC / 25°C / 70% RH										
	EMC EMISSION	Compliance to EN55022 (CISPR22) Class B										
OTHERS	EMC IMMUNITY	Compliance to EN61000-4-2,3,4,6,8; EN55024, light industry level, criteria A										
	MTBF	1734K hrs min. MIL-HDBK-217F (25°C)										
	DIMENSION	50.8*38.1*9.82mm (2*1.5*0.387") (L*W*H)										
NOTE	PACKING	0.03Kg; 180pcs/6.4Kg/0.97CUFT										
	1. All parameters NOT specially mentioned are measured at 12, 48VDC input, rated load and 25°C of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uF & 47uF parallel capacitor. 3. Tolerance : includes set up tolerance, line regulation and load regulation. 4. Short circuit no more than 60 seconds. 5. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on http://www.meanwell.com) 6. Derating to 80% load is needed for NSD15-48S series at 18Vdc input voltage. Full output wattage can be acquired when the input voltage is higher than 20Vdc. 7. EMC filter suggestion:											

■ Mechanical Specification

Unit:mm[inch]

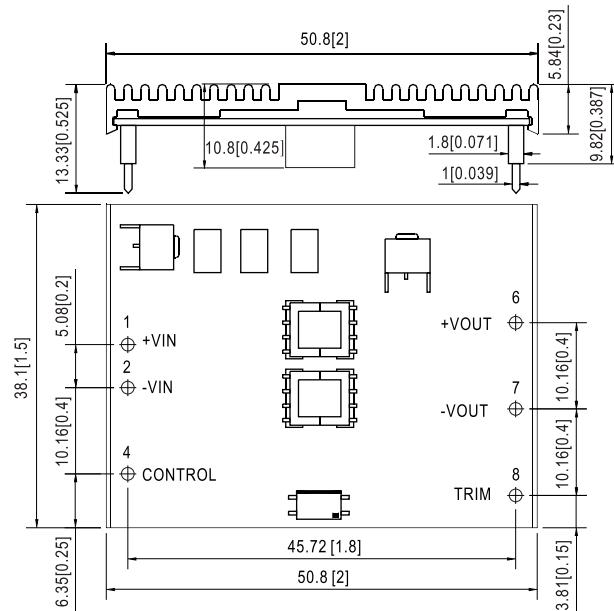


Pin No. Assignment


Pin No.	Assignment	Pin No.	Assignment
1	+VIN	6	+VOUT
2	-VIN	7	-VOUT
3,5	No Pin	8	TRIM
4	CONTROL		

■ Block Diagram


fosc : 400KHz

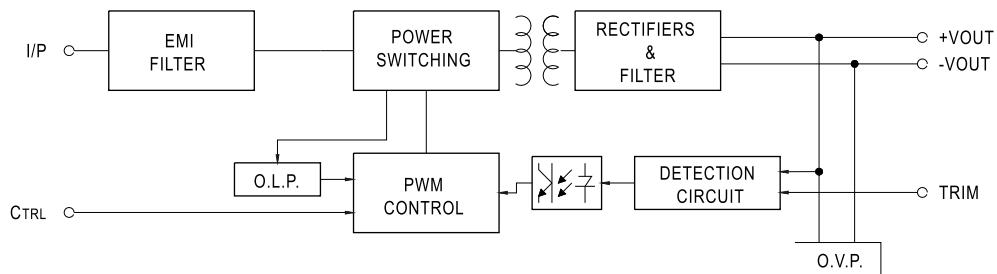

■ Derating Curve

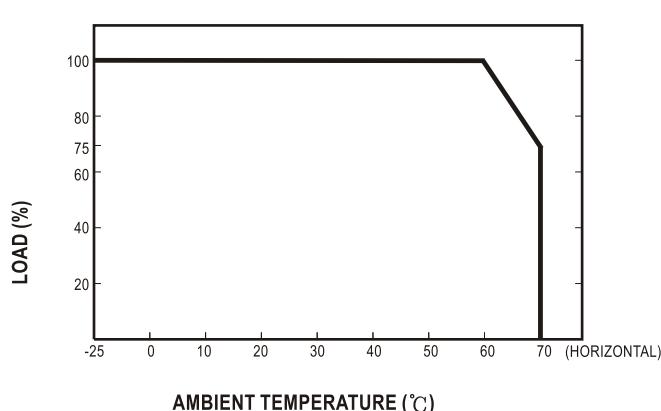

■ ON/OFF Control & Output Trim

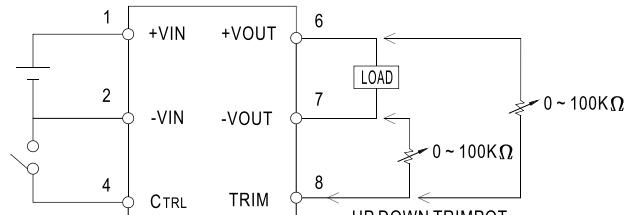

CONTROL INPUT.....PIN4

CONTROL COMMON.....PIN2

LOGIC COMPATIBILITY.....CMOS OR OPEN COLLECTOR TTL

CONTROL VOLTAGE

ON.....+5.5VDC min OR OPEN CIRCUIT

OFF.....+2.5VDC max. OR SHORT TO PIN2