



(IRM-90)



(IRM-90-xxST)


 BS EN/EN60335-1  
 BS EN/EN62368-1


## ■ Features


- 3.43"x2.05"compact size
- PCB,chassis or screw terminal mounting version
- Universal input 80~305VAC
- No load power consumption<0.3W
- EMI BS EN/EN55032 ClassB without additional components
- Wide operating temp. rage -30~80°C
- Protections: Short circuit / Overload / Over voltage
- Cooling by free air convection
- Isolation Class II
- Over voltage category III
- Operating attitude up to 4000 meters (Note.7)
- 100W peak(10 sec.)
- 3 years warranty

## ■ Description

IRM-90 is a 90W miniature (87\*52\*29.5mm) AC-DC PCB-mount module type power supply, ready to be soldered onto the PCB boards of various kinds of electronic instruments or industrial automation equipments. This product allows the universal input voltage range of 80~305VAC. The 94V-0 flame retardant plastic case and potted with silicone enhance the heat dissipation and meet the anti-vibration demand up to 2~5G anti-vibration by model; moreover, it provides the fundamental resistance to dust and moisture.

With the high efficiency up to 93% and the extremely low no-load power consumption below 0.3W, IRM-90 series fulfills the worldwide regulation for the low power consumption requirement for electronics. The entire series is a Class II design (no FG pin), incorporating the built-in EMI filtering components, enabling the compliance with BS EN/EN55032 Class B; the supreme EMC features keep the end electronic units from from electromagnetic interference. In addition to the PCB mounting style model, IRM-90 series also offers the screw terminal style model (ST).

## ■ Model Encoding

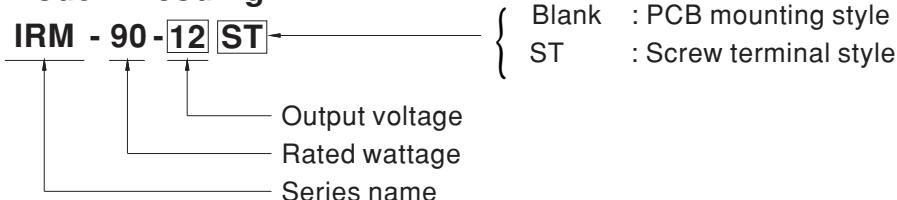

## ■ Applications

- Industrial electrical equipment
- Mechanical equipment
- Factory automation equipment
- Handheld electronic device


## ■ GTIN CODE

 MW Search: <https://www.meanwell.com/serviceGTIN.aspx>


## SPECIFICATION

MODEL	IRM-90-12 <input type="checkbox"/>	IRM-90-15 <input type="checkbox"/>	IRM-90-24 <input type="checkbox"/>	IRM-90-48 <input type="checkbox"/>		
OUTPUT	<b>DC VOLTAGE</b>	12V	15V	24V		
	<b>CURRENT</b>	Peak(10 sec.) Convection	7.37A 6.7A	4.13A 3.75A		
	<b>RATED POWER</b>	Peak(10 sec.) <sup>Note.2</sup> Convection	88.4W 80.4W	93.5W 85.05W		
	<b>RIPPLE &amp; NOISE (max.)</b> Note.3	120mVp-p	150mVp-p	200mVp-p		
	<b>VOLTAGE TOLERANCE</b> Note.4	±2.0%	±2.0%	±2.0%		
	<b>LINE REGULATION</b>	±0.5%	±0.5%	±0.5%		
	<b>LOAD REGULATION</b>	±1.0%	±0.5%	±0.5%		
	<b>SETUP, RISE TIME</b>	1000ms, 30ms/230VAC	1000ms, 30ms/115VAC at full load			
	<b>HOLD UP TIME (Typ.)</b>	30ms/230VAC	10ms/115VAC at full load			
	<b>VOLTAGE RANGE</b> Note.5	80 ~ 305VAC	113 ~ 431VDC			
INPUT	<b>FREQUENCY RANGE</b>	47 ~ 63Hz				
	<b>EFFICIENCY (Typ.)</b>	92%	92.5%	93%		
	<b>AC CURRENT (Typ.)</b>	1.9A/115VAC	1.1A/230VAC			
	<b>INRUSH CURRENT (Typ.)</b>	COLD START	30A/115VAC	65A/230VAC		
	<b>LEAKAGE CURRENT (max.)</b> Note.6	< 0.25mA/240VAC				
PROTECTION	<b>OVERLOAD</b>	115% ~ 160% rated output power Protection type : Hiccup mode, recovers automatically after fault condition is removed				
	<b>OVER VOLTAGE</b>	12.6 ~ 16.2V	15.8 ~ 20.3V	25.2 ~ 32.4V		
	<b>OVER TEMPERATURE</b>	Protection type : Shut down o/p voltage, re-power on to recover				
ENVIRONMENT	<b>WORKING TEMP.</b>	-30 ~ +80°C (Refer to "Derating Curve")				
	<b>WORKING HUMIDITY</b>	20 ~ 90% RH non-condensing				
	<b>STORAGE TEMP.</b>	-40 ~ +85°C				
	<b>TEMP. COEFFICIENT</b>	±0.03%/°C (0 ~ 50°C)				
	<b>SOLDERING TEMPERATURE</b>	Wave soldering: 265°C, 5s (max.); Manual soldering: 390°C, 3s (max.)				
	<b>VIBRATION</b>	Blank:10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes ST:10 ~ 500Hz, 5G 10min./1cycle, period for 60min. each along X, Y, Z axes				
	<b>OPERATING ALTITUDE</b> Note.7	III; EN62368-1;altitude up to 2000 meters				
SAFETY & EMC (Note 8)	<b>SAFETY STANDARDS</b>	IEC62368-1, IEC60335-1, Dekra BS EN/EN60335-1,BS EN/EN62368-1,UL62368-1, TUV BS EN/EN62368-1, EAC TP TC 004 approved				
	<b>WITHSTAND VOLTAGE</b>	I/P-O/P:4KVAC				
	<b>ISOLATION RESISTANCE</b>	I/P-O/P:100M Ohms / 500VDC / 25°C / 70% RH				
	<b>EMC EMISSION</b>	<b>Parameter</b>	<b>Standard</b>	<b>Test Level / Note</b>		
		Conducted	BS EN/EN55032 (CISPR32),BS EN/EN55014-1	Class B		
		Radiated	BS EN/EN55032 (CISPR32),BS EN/EN55014-1	Class B		
		Harmonic Current	BS EN/EN61000-3-2	Class A		
	<b>EMC IMMUNITY</b>	Voltage Flicker	BS EN/EN61000-3-3	-----		
		BS EN/EN55035, BS EN/EN1000-6-2,BS EN/EN55014-2				
		<b>Parameter</b>	<b>Standard</b>	<b>Test Level / Note</b>		
		ESD	BS EN/EN61000-4-2	Level 3, 8KV air; Level 2, 4KV contact, criteria A		
		RF field susceptibility	BS EN/EN61000-4-3	Level 3, criteria A		
		EFT bursts	BS EN/EN61000-4-4	Level 3, criteria A		
		Surge susceptibility	BS EN/EN61000-4-5	Level 4, 2KV/L-N, criteria A		
		Conducted susceptibility	BS EN/EN61000-4-6	Level 3, criteria A		
OTHERS	<b>Magnetic field immunity</b>	BS EN/EN61000-4-8	Level 4, criteria A			
	<b>Voltage dip, interruption</b>	BS EN/EN61000-4-11	>95% dip 0.5 periods, 30% dip 25 periods, >95% interruptions 250 periods			
	<b>MTBF</b>	5088.4K hrs min. Telcordia SR-332 (Bellcore) ; 609.9K hrs min. MIL-HDBK-217F (25°C)				
<b>DIMENSION</b>	PCB mounting style : 87*52*29.5mm (L*W*H)		Screw terminal style : 109*52*33.5mm (L*W*H)			
	PCB mounting style : 0.197Kg;60pcs/11.8Kg/0.94CUFT		Screw terminal style : 0.219Kg;50pcs/12Kg/0.56CUFT			
NOTE	1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. 2. 33% Duty cycle maximum within every 30 seconds. Average output power should not exceed the rated power. 3. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1 μf & 47 μf parallel capacitor. 4. Tolerance : includes set up tolerance, line regulation and load regulation. 5. Derating may be needed under low input voltages. Please check the derating curve for more details. 6. Leakage current was measured from primary input to DC output. 7. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft). 8. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on <a href="http://www.meanwell.com">http://www.meanwell.com</a> )					
	※ Product Liability Disclaimer : For detailed information, please refer to <a href="https://www.meanwell.com/serviceDisclaimer.aspx">https://www.meanwell.com/serviceDisclaimer.aspx</a>					


## ■ Block Diagram

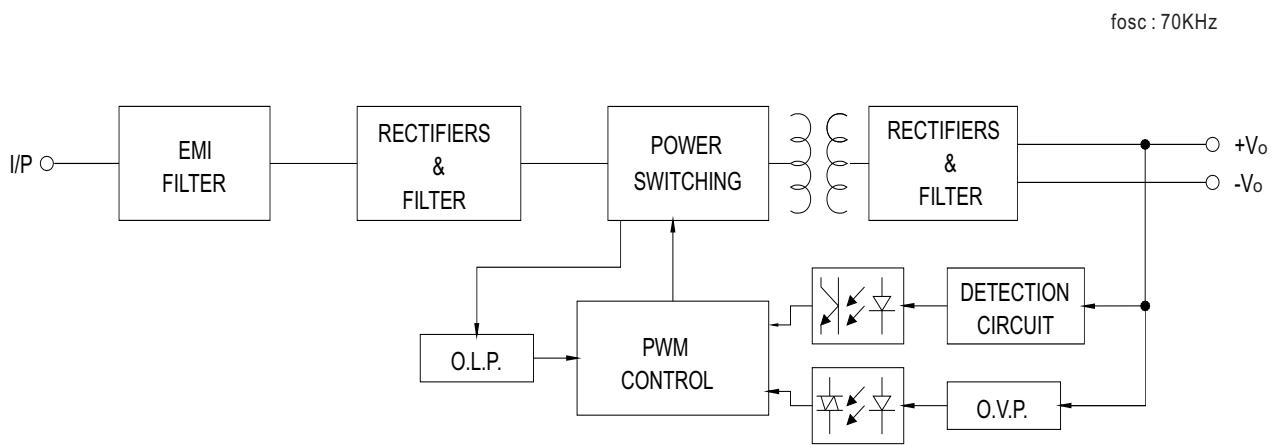

## ■ Derating Curve

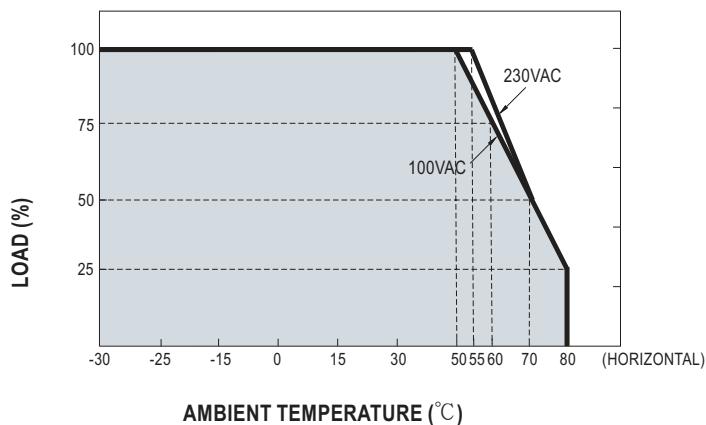


## ■ Output Derating VS Input Voltage

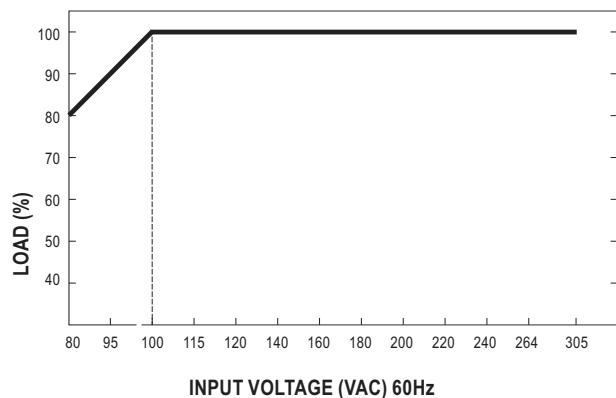


**■ Mechanical Specification**

Case No.IRM60 Unit:mm

- PCB mounting style (IRM-90)

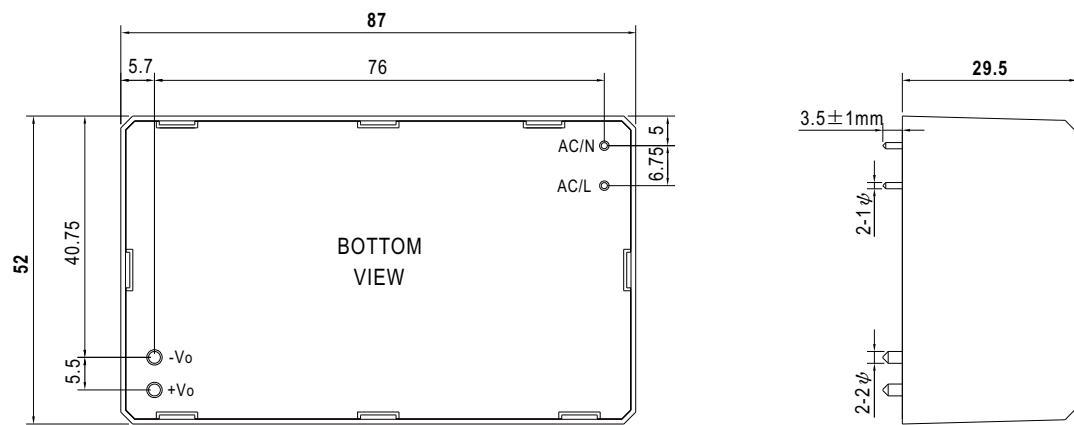
 AC/L, AC/N P/N diameter: 1 $\phi$   
 +Vo, -Vo P/N diameter: 2 $\phi$ 

- Screw terminal style (IRM-90-xxST)

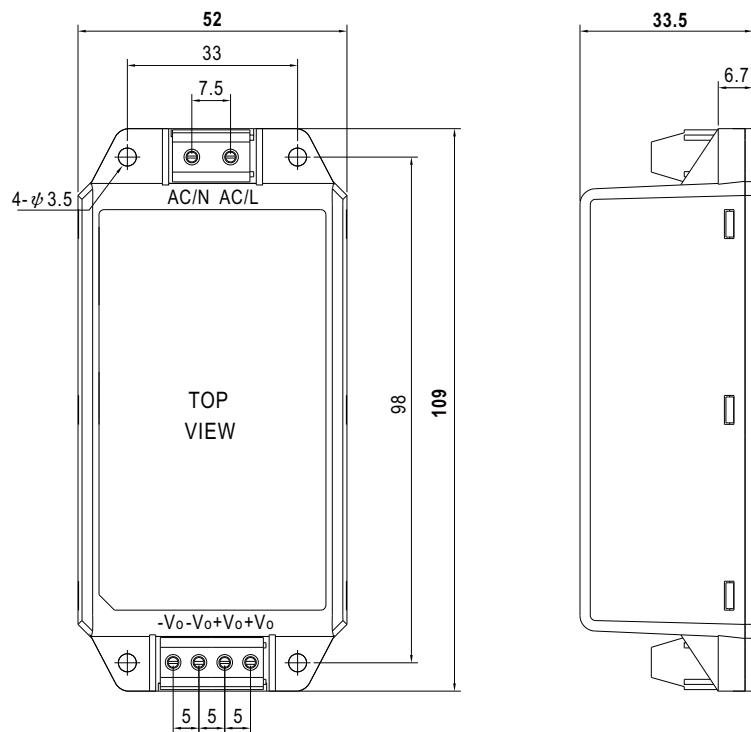
**■ Installation Manual**

 Please refer to : <http://www.meanwell.com/manual.html>