



(NGE45I)



(NGE45E)



(NGE45U)



IEC62368-1  
BS EN/IEC62368-1  
IEC60061-1/1-1-11  
BS EN/IEC60061-1/1-1-11  
IEC61558-1/1-2-16  
BS EN/IEC61558-1/1-2-16  
IEC60335-1  
BS EN/IEC60335-1

IEC62368-1  
BS EN/IEC62368-1  
IEC60061-1/1-1-11  
BS EN/IEC60061-1/1-1-11  
IEC61558-1/1-2-16  
BS EN/IEC61558-1/1-2-16  
IEC60335-1  
BS EN/IEC60335-1

Energy Verified  
Rendement  
Énergétique Vérifié



## ■ Features

- MEAN WELL Patent Application Number: 202330347779.4
- Interchangeable AC plugs (I-Type)**
- Global certificates in multi-fields**  
(ITE 62368-1, Medical 60601-1, Household 60335-1, Industrial 61558-1/-2-16)
- 80~264Vac Universal AC input
- Ultra slim(30mm)**
- No load power consumption < 0.075W
- Energy efficiency Level **VI**
- Class II power (no earth pin)
- Protections: Short circuit / Overload / Over voltage
- Pass LPS
- Extremely low leakage current <100uA
- 30°C~+70°C wide range working temperature
- Various DC plug quick adapter accessory available  
(Plug kit sold separately, please refer to : [https://www.meanwell.com/upload/pdf/DC\\_plug.pdf](https://www.meanwell.com/upload/pdf/DC_plug.pdf))
- 3 years warranty

## ■ Description

NGE45 is a highly reliable, 45W wall-mounted style single-output green adaptor series, which is compact and convenient for carry. This product is equipped with 7 types of interchangeable AC plug (European, USA, U.K., Australian, China, Korea and India type) that makes it very suitable for travel use. NGE45 is a Class II power unit (no FG), accepting the input range from 80VAC to 264VAC that it can satisfy the demands for various types of electrical devices.

With the working efficiency up to 91% and the extremely low no-load power consumption below 0.075W, NGE45 is compliant with the latest USA energy regulation EISA 2007/DoE, Canada NRCan, Australia and New Zealand MEPS, Korea KMEPS, EU ErP and CoC version5. The supreme feature allows the adaptor to save the energy when it is under either the operating mode or the standby mode. The entire series is approved for ITE, medical, household and industrial appliance safety regulations; moreover, it adopts the 94V-0 flame retardant plastic case that it can effectively prevent users from electric hazard.

## ■ Model Encoding

**NGE 45 I 12 -P1J**

DC plug type { P1J :Plug for standard model, 2.1 φ × 5.5 φ × 11mm, C+ tuning fork type  
Other options available by customer requested (see Page 6~7)

Output voltage (5V/9V/12V/15V/18V/24V/48V)

AC Plug { I : AC Pin fixed; Universal version with interchangeable plugs  
E : AC Pin fixed; EU version with non-interchangeable plug  
U : Foldable AC Pin; US version with non-interchangeable plug

Rated wattage

Series name

User's Manual



**SPECIFICATION**

ORDER NO.		NGE45○05-P1J	NGE45○09-P1J	NGE45○12-P1J	NGE45○15-P1J	NGE45○18-P1J	NGE45○24-P1J	NGE45○48-P1J						
		○ = I, U, E												
OUTPUT	DC VOLTAGE Note.2	5V	9V	12V	15V	18V	24V	48V						
	RATED CURRENT	5.63A	4.5A	3.75A	3A	2.5A	1.88A	0.94A						
	CURRENT RANGE	0 ~ 5.63A	0 ~ 4.5A	0 ~ 3.75A	0 ~ 3A	0 ~ 2.5A	0 ~ 1.88A	0 ~ 0.94A						
	RATED POWER	28.1W	40.5W	45W	45W	45W	45.1W	45.1W						
	RIPLE & NOISE (max.) Note.3	100mVp-p	100mVp-p	120mVp-p	150mVp-p	180mVp-p	240mVp-p	240mVp-p						
	VOLTAGE TOLERANCE Note.4	±5.0%	±5.0%	±3.0%	±3.0%	±3.0%	±2.0%	±2.0%						
	LINE REGULATION Note.5	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%						
	LOAD REGULATION Note.6	±5.0%	±5.0%	±3.0%	±3.0%	±3.0%	±2.0%	±2.0%						
SETUP, RISE, HOLD UP TIME		1500ms, 50ms, 30ms / 230VAC		3000ms, 50ms, 10ms / 115VAC at full load										
INPUT	VOLTAGE RANGE Note.7	80 ~ 264VAC	113 ~ 370VDC											
	FREQUENCY RANGE	47 ~ 63Hz												
	EFFICIENCY (Typ.)	84%	89%	90%	90%	90%	90%	91%						
	AC CURRENT	1A / 115VAC	0.6A / 230VAC											
	INRUSH CURRENT (max.)	COLD START 35A / 115VAC 70A / 230VAC												
PROTECTION	OVERLOAD	110% ~ 150% rated output power Protection type : 5~24V Hiccup mode, recovers automatically after fault condition is removed. 48V Shut down and latch off o/p voltage, re-power on to recover.												
		110% ~ 140% rated output voltage Protection type : Clamp by zener diode												
	WORKING TEMP.	-30 ~ +70°C (Refer to "Derating Curve")												
	WORKING HUMIDITY	20% ~ 90% RH non-condensing												
ENVIRONMENT	STORAGE TEMP., HUMIDITY	-20 ~ +85°C, 10 ~ 95% RH non-condensing												
	TEMP. COEFFICIENT	±0.03% / °C (0 ~ 45°C)												
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes												
SAFETY & EMC (Note. 8)	SAFETY STANDARDS	CB	IEC62368-1, IEC60601-1/1-11, IEC61558-1/2-16, IEC60335-1;											
		UL	UL62368-1, CSA C22.2 NO. 62368-1, ANSI/AAMI ES60601-1/1-11(3.2 Version), CAN/CSA-C22.2 NO.60601-1/1-11; ANSI/AAMI ES60601-1-11, CAN/CSA-C22.2 NO.60601-1-11(for U Type only)											
		DEKRA	BS EN/EN62368-1, BS EN/EN60601-1/1-11, BS EN/EN61558-1/2-16, BS EN/EN60335-1;											
		PSE	J62368-1; BSMI CNS15598-1;											
		RCM	AS/NZS 61558-1/2-16; EAC TPTC004;											
		CCC	GB4943.1 approved.											
	EMC EMISSION	KC	KC62368-1;											
		BIS	IS13252(part1):2010/IEC60950-1:2005. (Please refer to next page for more details)											
		WITHSTAND VOLTAGE	I/P-O/P:4000VAC											
		ISOLATION RESISTANCE	I/P-O/P:100M Ohms / 500VDC / 25°C / 70% RH											
OTHERS	EMC IMMUNITY	Parameter	Standard			Test Level / Note								
		Conducted emission	BS EN/EN55032(CISPR32)/EN55011 , FCC Part15 , CNS15936, GB/T 9254.1-2021, KC C9832			Class B								
		Radiated emission	BS EN/EN55032(CISPR32)/EN55011 , FCC Part15 , CNS15936, GB/T 9254.1-2021, KC C9832			Class B								
		Harmonic current	BS EN/EN61000-3-2			Class A								
		Parameter	Standard			Test Level / Note								
		ESD	BS EN/EN61000-4-2			Level 3, 15KV air; Level 2, 8KV contact								
	EMC IMMUNITY	RF field susceptibility	BS EN/EN61000-4-3			Level 2, 3V/m								
		EFT bursts	BS EN/EN61000-4-4			Level 3, 2KV								
		Surge susceptibility	BS EN/EN61000-4-5			Level 3, 1KV/L-N								
		Conducted susceptibility	BS EN/EN61000-4-6			Level 2, 3V								
DC OUTPUT CONNECTOR	Magnetic field immunity		BS EN/EN61000-4-8			Level 1, 1A/m								
	Voltage dips , interruption		BS EN/EN61000-4-11			>95% dip 0. 5 periods, 30% dip 25 periods, >95% interruptions 250 periods								
	PLUG		See page 6~7 ; Other type available by customer requested											
OTHERS	CABLE		See page 6~7 ; Other type available by customer requested											
	PACKING	MAIN BODY	196g; 60pcs/ 13.4Kg / 0.94CUFT for NGE45lxz/Uxx-P1J			211g; 45pcs/ 11.4Kg / 1.06CUFT for NGE45Exx-P1J								
NOTE	AC PLUGS		Refer to Page 3											
	CABLE		See page 6~7 ; Other type available by customer requested											
1.All parameters are specified at 230VAC input, rated load, 25°C 70% RH ambient. 2.DC voltage: The output voltage set at point measure by plug terminal & 50% load. 3.Ripple & noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1 μF & 47 μF capacitor. 4.Tolerance: includes set up tolerance, line regulation, load regulation. 5.Line regulation is measured from low line to high line at rated load. 6.Load regulation is measured from 0% to 100% rated load. 7.Derating may be needed under low input voltage. Please check the derating curve for more details. 8.The power supply is considered as an independent unit, but the final equipment still need to re-confirm that the whole system complies with the EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on <a href="https://www.meanwell.com/Upload/PDF/EMI_statement_en.pdf">https://www.meanwell.com/Upload/PDF/EMI_statement_en.pdf</a> ) 9.Design meet US DoE Level VII (from Docket number EERE-2020-BT-STD-0006). ※ Product Liability Disclaimer : For detailed information, please refer to <a href="https://www.meanwell.com/serviceDisclaimer.aspx">https://www.meanwell.com/serviceDisclaimer.aspx</a>														

■ **Interchangeable AC Plug Specifically for NGE12/18/30/45/65/90 (I-Type)**

Order NO.	NGE45Ixx-P1J (Universal Version)							NGE45Exx-P1J (EU Version)	NGE45Uxx-P1J (US Version)
AC plug	Interchangeable Type (Unfoldable; AC Pin fixed)							Non-Interchangeable Type	
	EU	US	UK	AU	CN	KR	IN	Unfoldable AC Pin	Foldable AC Pin
Certificate	           	       							

 ■ **AC Plugs Accessory (Sold Separately)**

MW's order NO.	Per Unit	Per Bag	Per Carton	
		Q'Ty	Q'Ty	G.W.
AC PLUG-EU4		30 pcs	300 pcs (10 bags)	5.4Kg
AC PLUG-US4		30 pcs	300 pcs (10 bags)	4.7Kg
AC PLUG-UK4		30 pcs	300 pcs (10 bags)	7.1Kg
AC PLUG-AU4		30 pcs	300 pcs (10 bags)	5.2Kg
AC PLUG-CN4		30 pcs	300 pcs (10 bags)	4.8Kg
AC PLUG-KR4		30 pcs	300 pcs (10 bags)	6.3Kg
AC PLUG-IN4		30 pcs	300 pcs (10 bags)	7.7Kg
AC PLUG-MIX4	 (Per Set)	30 pcs (5 Types*6 mixed bags)	300 pcs (5 Types*6 mixed bags) (10 bags)	5.45Kg
AC PLUG-MIX5	 (Per Set)	35 pcs (7 Types*5 mixed bags)	315 pcs (7 Types*5 mixed bags) (9 bags)	6.13Kg


■ **Interchangeable AC Plug Installation Steps (Convertible with I Type only)**

Step1	Step2
	
Slide in AC converter along the guided rail between the metal prongs until it is locked in (with a "click" sound).	Check if the new plug type is stable and correct before use.


**Note:**

1. NGE45I main body unit and AC inlet plug should be ordered separately.
2. NGE45I needs to be used along with one of the AC inlet plug (EU,US,UK,AU,CN,KR,IN).

■ **Derating Curve**

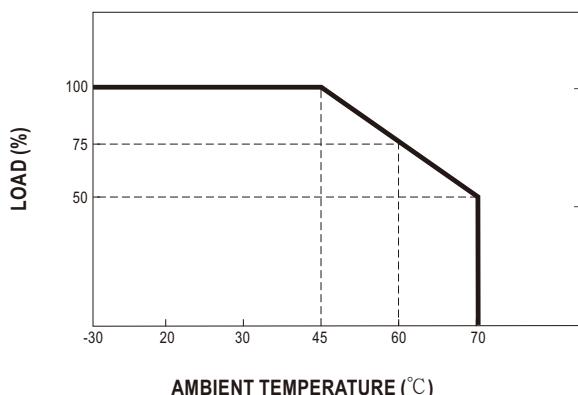

■ **Static Characteristics**

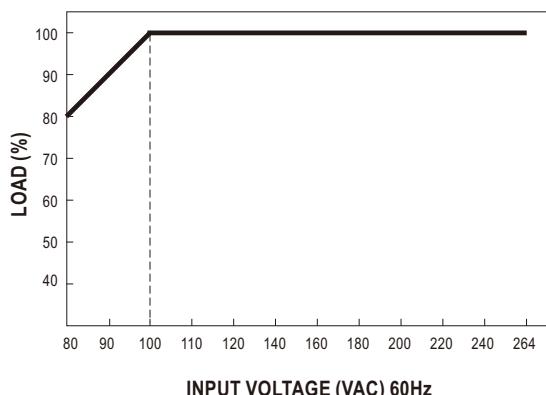


**■ Mechanical Specification**

 (Unit: mm, tolerance  $\pm 1\text{mm}$ )


Case No.NGE65

**※ Cable connection**


NGE45Ixx-P1J (Universal Version - AC Pin fixed; With interchangeable plugs) :

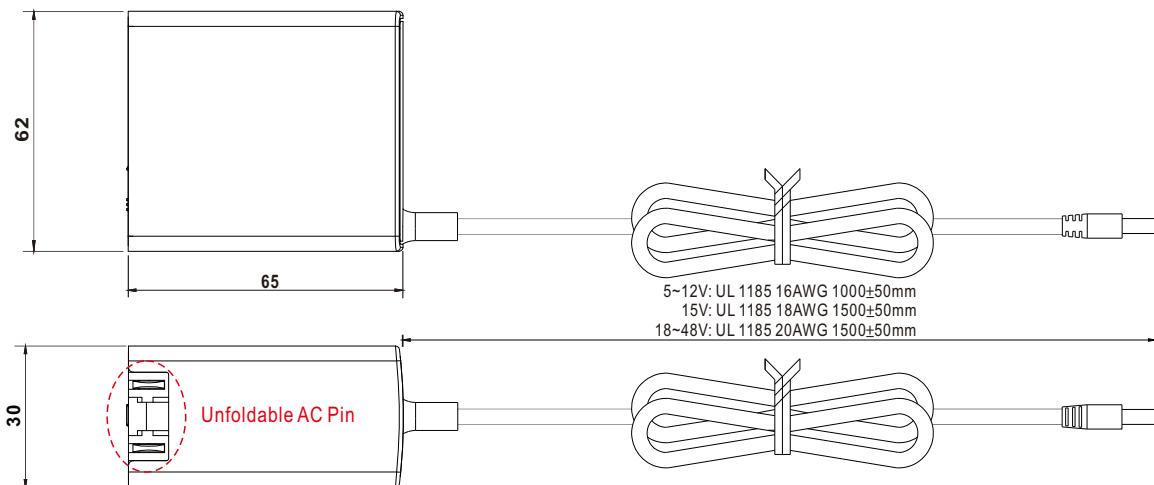

NGE45Exx-P1J (EU Version - AC Pin fixed; With non-interchangeable plug) :

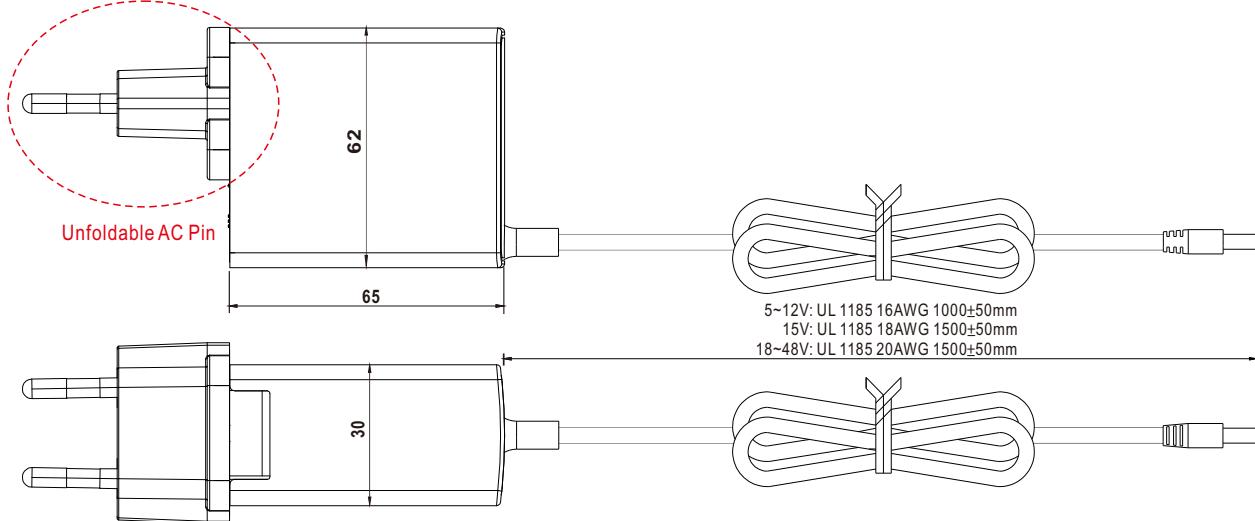

NGE45Uxx-P1J (US Version - Foldable AC Pin; With non-interchangeable plug) :

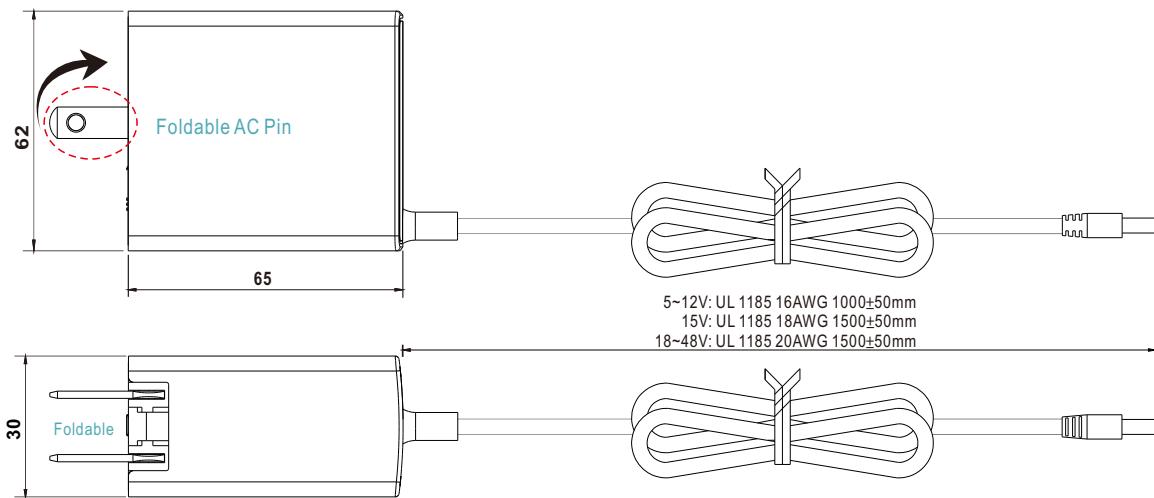

**■ DC Output Plug**

- ◎ Standard plug: P1J

Unit:mm

P1J	Pin Assignment
	
5.5 2.1	Outside $\ominus$ $\bullet$ $\oplus$ Inside

- ◎ DC plug changeable through:

- (1) Customization of the standard part with an optional DC plug according to the table (MOQ applicable)
- (2) Quick adapter accessory (sold separately without MOQ)





Please refer to below table and online selection guide : [https://www.meanwell.com/upload/pdf/DC\\_plug.pdf](https://www.meanwell.com/upload/pdf/DC_plug.pdf)

Example quick adapter accessory:



- ◎ Optional DC plug: (Available in customized cable or quick adapter)

Tuning Fork Style	Type No.	A OD	B ID	C L	Quick Adapter Accessory
	P1I	5.5	2.1	9.5	Available (Current rating: 7.5A max.)
	P1L	5.5	2.5	9.5	
	P1M	5.5	2.5	11.0	
	P1IR	5.5	2.1	9.5	
	P1JR	5.5	2.1	11.0	
	P1LR	5.5	2.5	9.5	
	P1MR	5.5	2.5	11.0	
Barrel Style	Type No.	A OD	B ID	C L	None
	P2I	5.5	2.1	9.5	
	P2J	5.5	2.1	11.0	
	P2L	5.5	2.5	9.5	
	P2M	5.5	2.5	11.0	
	P2IR	5.5	2.1	9.5	
	P2JR	5.5	2.1	11.0	
	P2LR	5.5	2.5	9.5	
	P2MR	5.5	2.5	11.0	
Lock Style	Type No.	A OD	B ID	C L	None
	P2S(S761K)	5.53	2.03	12.06	
	P2K(761K)	5.53	2.54	12.06	
	P2C(S760K)	5.53	2.03	9.52	
	P2D(760K)	5.53	2.54	9.52	

Min. Pin Style	Type No.	A	B	C	Quick Adapter Accessory	
		OD	ID	L		
  EIAJ equivalent	P3A	2.35	0.7	11.0	Available (Current rating: 5A max.)	
	P3B	4.0	1.7	11.0		
	P3C	4.75	1.7	11.0		
Center Pin Style	Type No.	A	B	C	Available (Current rating: 7.5A max.)	
		OD	ID	L		
	P4A	5.5	3.4	11.0	1.0	
  EIAJ equivalent	P4B	6.5	4.4	11.0	1.4	
	P4C	7.4	5.1	11.0	0.6	
	Type No.	Pin Assignment				
  KYCON KPPX-3P equivalent	R6B	PIN No.		Output		
		1		+Vo	Available (Current rating: 7.5A max.)	
		2		-Vo		
		3		+Vo		
  KYCON KPPX-4P equivalent	R7B	PIN No.		Output		
		1		+Vo	Available (Current rating: 7.5A max.)	
		2		-Vo		
		3		-Vo		
		4		+Vo		
  Length of Land L1 by request (MW's standard length, L: <u>25</u> mm, L1: <u>10</u> mm)	by customer	Pin Assignment				
		PIN No.		Output		
		1 (Ribbed)		+Vo	None	
		2 (Letter)		-Vo		

## ■ Installation Manual

Please refer to : <http://www.meanwell.com/manual.html>