



■ Feature

- Width only 35mm (2SU)
- 4:1 ultra wide input range
- -40~+85°C wide working temperature
- No minimum load required
- DC output adjustable ($\pm 10\%$)
- Cooling by free air convection
- Can be installed on DIN rail TS-35/7.5 or 15
- Protections: Short circuit / Overload / Over voltage /
Input reverse polarity /
Input under voltage protection
- 4KVdc I/O isolation(Reinforced isolation)
- 3 years warranty

■ Applications

- Industrial control system
- Semi-conductor fabrication equipment
- Factory automation
- Electro-mechanical
- Wireless network
- Telecom or datacom system

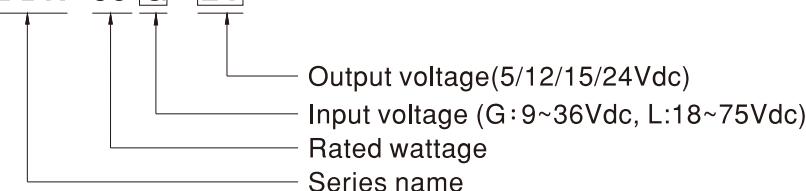
■ Description

DDR-30 series is a 30W DIN Rail type DC-DC converter with main features including DIN rail-type easy installation, ultra slim width (35mm), 4:1 ultra wide input voltage, -40~+85°C wide operating temperature, 4KVdc I/O isolation, adjustable output voltage ($\pm 10\%$) and full protective functions...etc.

This series has two input options: 9~36V / 18~75V and various output options: 5V / 12V / 15V / 24V and can be used for industrial control, security control, communication system and other fields. Suitable applications are DC buck/boost regulator, increasing system insulation level and voltage drop compensation along cable...etc.

■ Model Encoding

DDR - 30 [G] - 24



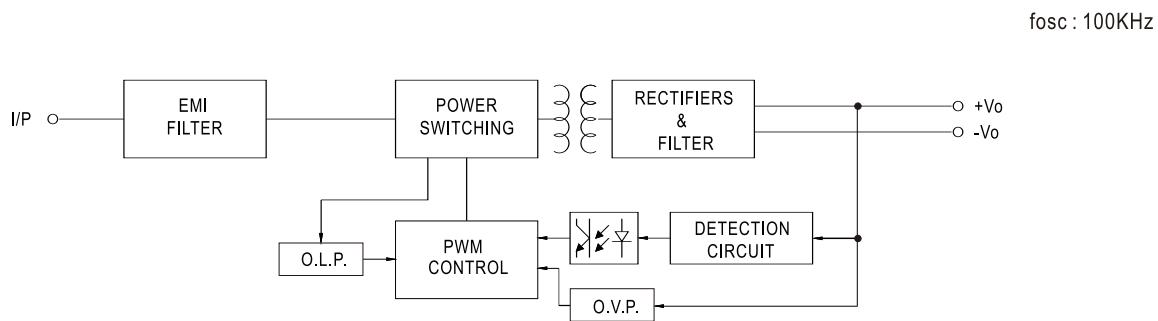
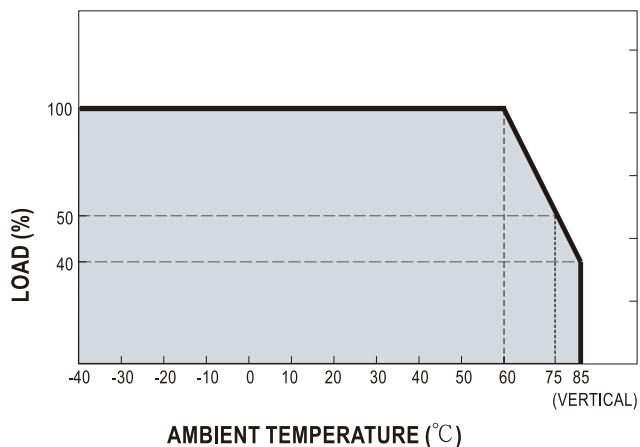
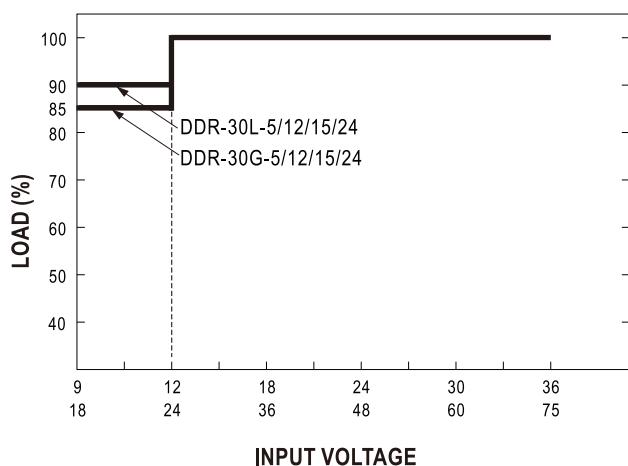


30W DIN Rail Type DC-DC Converter

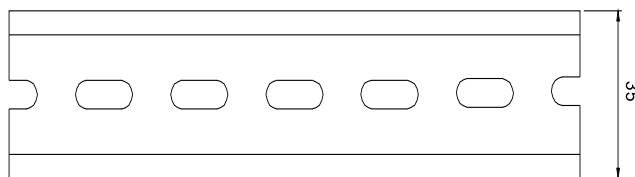
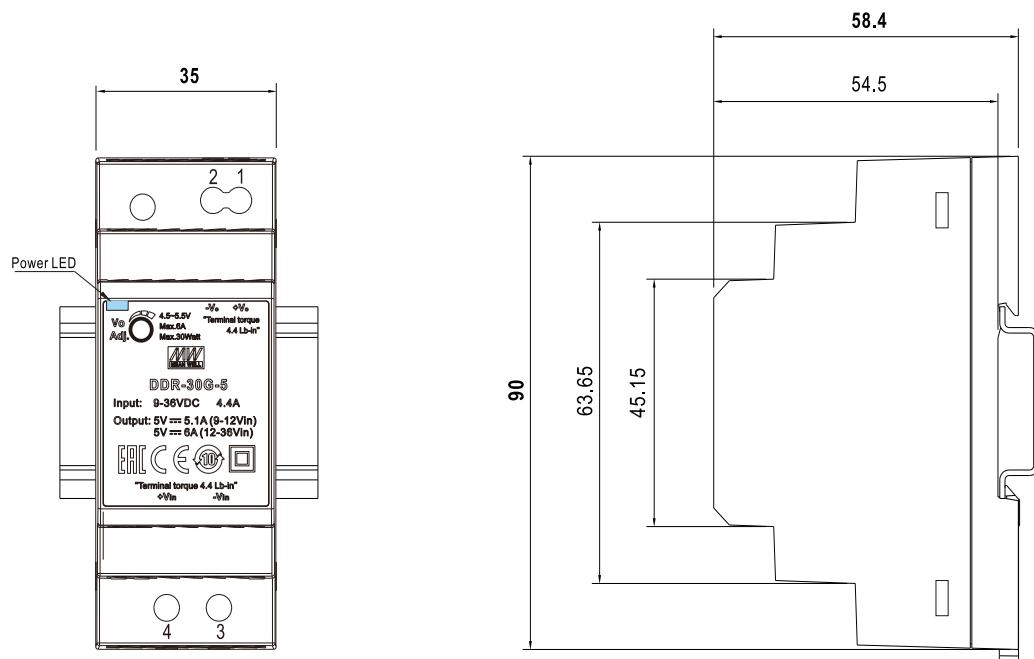
DDR-30 series

SPECIFICATION

MODEL	DDR-30G-5	DDR-30G-12	DDR-30G-15	DDR-30G-24	DDR-30L-5	DDR-30L-12	DDR-30L-15	DDR-30L-24							
OUTPUT	DC VOLTAGE	5V	12V	15V	24V	5V	12V	15V	24V						
	RATED CURRENT	6A	2.5A	2A	1.25A	6A	2.5A	2A	1.25A						
	CURRENT RANGE	0 ~ 6A	0 ~ 2.5A	0 ~ 2A	0 ~ 1.25A	0 ~ 6A	0 ~ 2.5A	0 ~ 2A	0 ~ 1.25A						
	RATED POWER	30W	30W	30W	30W	30W	30W	30W							
	RIPPLE & NOISE (max.) Note.2	60mVp-p	75mVp-p	75mVp-p	100mVp-p	60mVp-p	75mVp-p	75mVp-p	100mVp-p						
	VOLTAGE ADJ. RANGE	4.5 ~ 5.5V	9 ~ 13.2V	13.5 ~ 16.5V	21.6 ~ 28V	4.5 ~ 5.5V	9 ~ 13.2V	13.5 ~ 16.5V	21.6 ~ 28V						
	VOLTAGE TOLERANCE Note.3	±2.0%	±2.0%	±2.0%	±2.0%	±2.0%	±2.0%	±2.0%	±2.0%						
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%						
	LOAD REGULATION	±1.5%	±0.5%	±0.5%	±0.5%	±1.5%	±0.5%	±0.5%	±0.5%						
	SETUP, RISE TIME	120ms, 85ms at full load													
INPUT	HOLD UP TIME (Typ.)	G-type: 7ms@24Vdc input				L-type: 18ms@48Vdc input									
	EXTERNAL CAPACITANCE LOAD (Max.)	3300 μ F	2200 μ F	1500 μ F	1000 μ F	3300 μ F	2200 μ F	1500 μ F	1000 μ F						
	VOLTAGE RANGE Note.4	9 ~ 36Vdc				18 ~ 75Vdc									
	EFFICIENCY (Typ.)	85%	86%	87%	89%	86%	89%	90%	91%						
PROTECTION	DC CURRENT (Typ.)	1.5A /24Vdc				0.8A /48Vdc									
	INRUSH CURRENT (Typ.)	15A /24Vdc				15A /48Vdc									
	OVERLOAD	110 ~ 150% rated output power Protection type : Constant current limiting, recovers automatically after fault condition is removed													
	OVER VOLTAGE	5.75 ~ 7V	13.8 ~ 16.2V	17.25 ~ 20.25V	28.8 ~ 34V	5.75 ~ 7V	13.8 ~ 16.2V	17.25 ~ 20.25V	28.8 ~ 34V						
ENVIRONMENT	REVERSE POLARITY	Protection type : Shut down o/p voltage, re-power on to recover													
	UNDER VOLTAGE LOCKOUT	By internal MOSFET, no damage, recovers automatically after fault condition removed 24Vin (G-type):Power ON \geq 9V, OFF \leq 8.5V 48Vin (L-type):Power ON \geq 18V , OFF \leq 17V													
	WORKING TEMP.	-40 ~ +85°C (Refer to "Derating Curve")													
	WORKING HUMIDITY	5 ~ 95% RH non-condensing													
	STORAGE TEMP., HUMIDITY	-40 ~ +85°C , 5 ~ 95% RH non-condensing													
SAFETY & EMC (Note 5)	TEMP. COEFFICIENT	±0.03%/°C (0 ~ 60°C)													
	VIBRATION	Component:10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes; Mounting: Compliance to IEC60068-2-6													
	OPERATING ALTITUDE	2000 meters													
	SAFETY STANDARDS	IEC 62368-1 (LVD) ,AS/NZS 62368.1 approved; Design refer to UL508													
	WITHSTAND VOLTAGE	I/P-O/P:4KVdc													
	ISOLATION RESISTANCE	I/P-O/P>100M Ohms / 500Vdc / 25°C / 70% RH													
OTHERS	EMC EMISSION	Parameter	Standard	Test Level / Note											
		Conducted	EN55032	Class B											
		Radiated	EN55032	Class B											
		Voltage Flicker	EN61000-3-3	-----											
	EMC IMMUNITY	EN55024 , EN61000-6-2(EN50082-2)	Parameter	Standard	Test Level / Note										
		ESD	EN61000-4-2	Level 3, 8KV air ; Level 3, 6KV contact; criteria A											
		Radiated	EN61000-4-3	Level 3, 10V/m ; criteria A											
		EFT / Burst	EN61000-4-4	Level 3, 2KV ; criteria A											
NOTE	Surge	EN61000-4-5	Level 3, 1KV/Line-Line ; criteria A												
	Conducted	EN61000-4-6	Level 3, 10V ; criteria A												
	Magnetic Field	EN61000-4-8	Level 4, 30A/m ; criteria A												
DIMENSION	MTBF	483.3K hrs min. MIL-HDBK-217F (25°C)													
	DIMENSION	35*90*54.5mm (W*H*D)													
	PACKING	0.12Kg;96pcs/12.5Kg/1.04CUFT													
1. All parameters NOT specially mentioned are measured at normal input (G:24Vdc, L:48Vdc), rated load and 25°C of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. 3. Tolerance : includes set up tolerance, line regulation and load regulation. 4. Derating may be needed under low input voltage. Please check the derating curve for more details. 5. The power supply is considered as an independent unit, but the final equipment still need to re-confirm that the whole system complies with the EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on http://www.meanwell.com) 6. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).															

Block Diagram

Derating Curve

Output derating VS input voltage


■ Mechanical Specification

 (Unit: mm, tolerance $\pm 0.5\text{mm}$)


ADMISSIBLE DIN-RAIL:TS35/7.5 OR TS35/15

Terminal Pin No. Assignment

Pin No.	Assignment
1	DC Output +Vo
2	DC Output -Vo
3	DC Input -Vin
4	DC Input +Vin

■ Installation Manual

 Please refer to : <http://www.meanwell.com/manual.html>