



28A AC Inrush Current Limiter

ICL-28R/28L



(ICL-28R)



(ICL-28L)



■ Features

- 48A inrush limiting current, 28A continuous
- 180~264VAC AC input
- Integrated bypass relay, no simple NTC
- Internal thermal protection
- Installed on DIN Rail TS-35/7.5 or 15 (ICL-28R)
- -30~+70°C wide working temperature
- Over voltage category III
- Operating altitude up to 5000 meters (Note. 2)
- 3 years warranty

■ Applications

- Allow connecting multiple power supply at same line
- Allows smaller and faster Circuit Breaker
- Capacitive load
- Protects against unintended trigger of circuit breaker

■ GTIN CODE

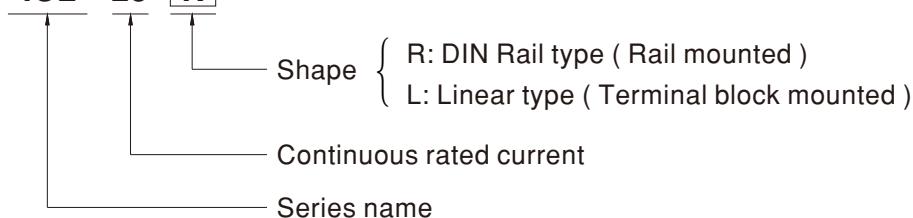
MW Search: <https://www.meanwell.com/serviceGTIN.aspx>

■ Description

The ICL-28 is a 28A inrush current limiter that can be used to reduce the high starting current due to capacitive load causing the circuit breaker to be false triggered. Several power supplies can be installed on the same AC line after the implementation of an ICL-28.

■ Model Encoding

ICL - 28 - R



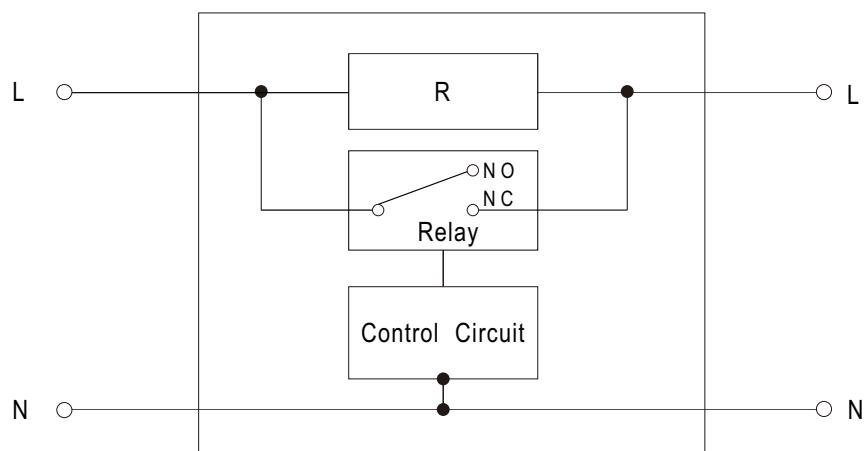
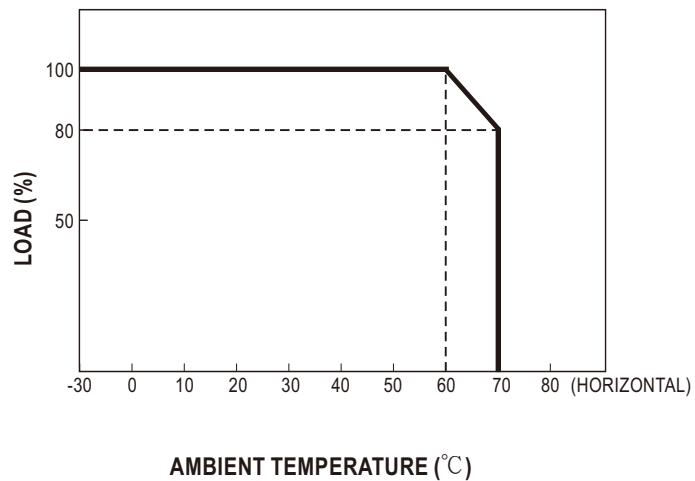


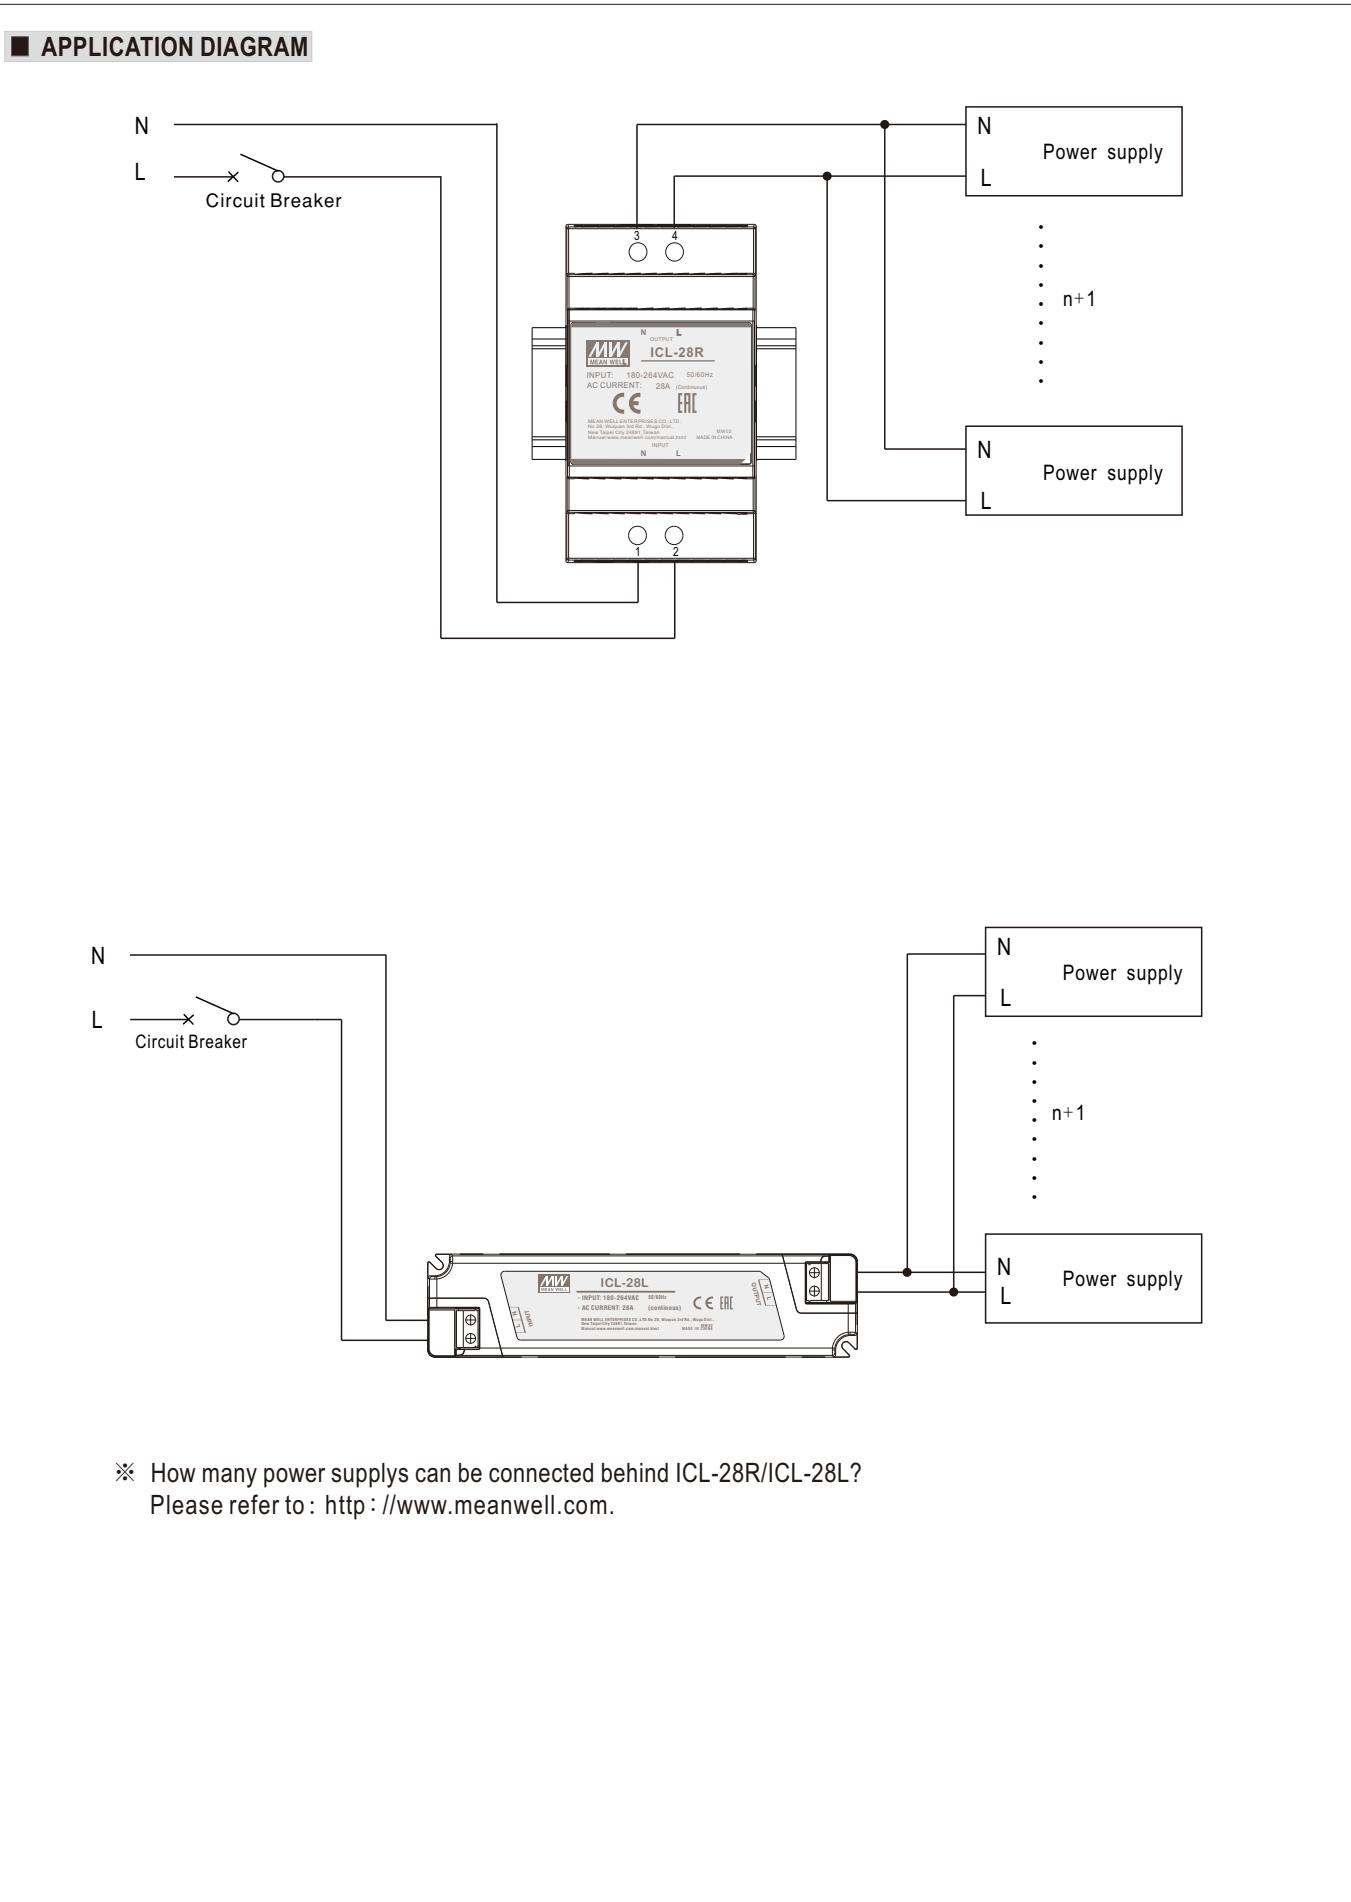
28A AC Inrush Current Limiter

ICL-28R/28L

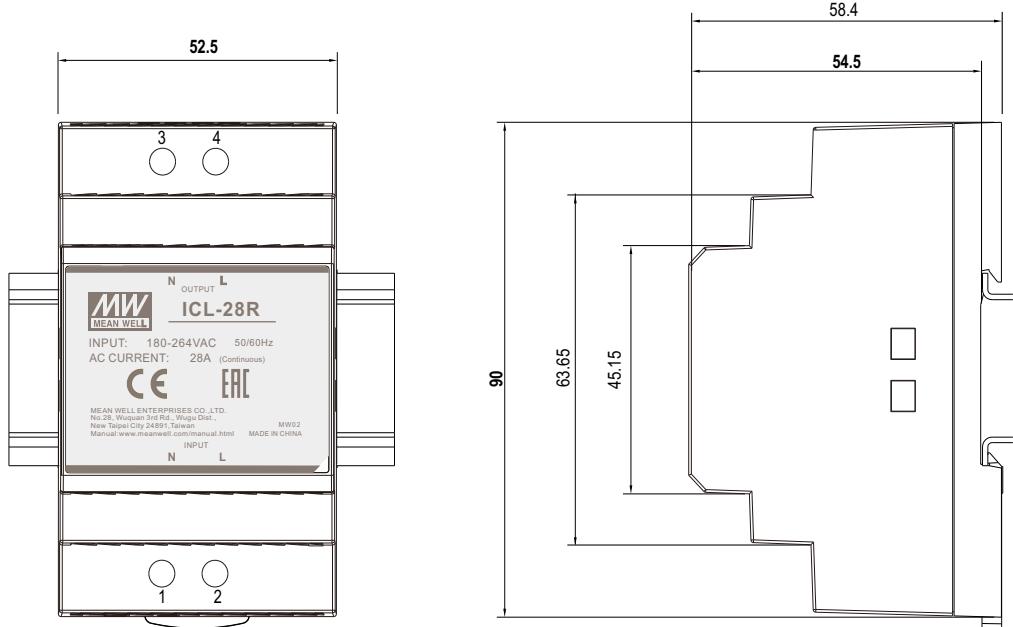
SPECIFICATION

MODEL	ICL-28R	ICL-28L		
AC INPUT VOLTAGE	180 ~ 264VAC	180 ~ 264VAC		
AC LINE FREQUENCY	47 ~ 63Hz			
INRUSH CURRENT LIMITING	48A			
AC CONTINUOUS RATED CURRENT	28A continuous			
AC INPUT POWER	6440VA (28A x 230VAC)			
AC INPUT CONSUMPTION	<2W at 264VAC, 50Hz input			
INTERNAL RELAY LIMITING TIME (TON POWER ON)	150±50ms			
INTERNAL RELAY	LIMITING CYCLES RELEASE TIME	3 cycle / 1 min 100±50ms		
INTERNAL PROTECTION	Thermal fuse protects overload and fire			
ALLOWED CAPACITIVE LOAD	6000 μ F max.			
WORKING TEMP.	-30 ~ +70°C (Refer to "Derating Curve")			
WORKING HUMIDITY	20 ~ 90% RH non-condensing			
STORAGE TEMP.	-40 ~ +85°C			
TEMP. COEFFICIENT	$\pm 0.03\%/\text{°C}$ (0 ~ 60°C) RH non-condensing			
VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes; Mounting: Compliance to IEC60068-2-6			
OPERATING ALTITUDE	Note. 2	5000 meters		
OVER VOLTAGE CATEGORY		III; According to IEC62368-1; altitude up to 5000 meters		
POLLUTION DEGREE		2		
SAFETY STANDARDS		LVD BS EN/EN62368-1 approved		
SAFETY & EMC (Note.3)	EMC EMISSION	Parameter	Standard	Test Level / Note
		Conducted	BS EN/EN55032	Class B
		Radiated	BS EN/EN55032	Class B
		Harmonic Current	BS EN/EN61000-3-2	Class A
		Voltage Flicker	BS EN/EN61000-3-3	-----
	EMC IMMUNITY	BS EN/EN55024, BS EN/EN55035, BS EN/EN61000-6-2		
		Parameter	Standard	Test Level / Note
		ESD	BS EN/EN61000-4-2	Level 3, 8KV air; Level 2, 4KV contact, criteria A
		Radiated Susceptibility	BS EN/EN61000-4-3	Level 3, criteria A
MTBF		EFT/Burst	BS EN/EN61000-4-4	Level 3, criteria A
		Surge	BS EN/EN61000-4-5	Level 4,2KV/L-N, criteria A
DIMENSION		Conducted	BS EN/EN61000-4-6	Level 3, criteria A
		Magnetic Field	BS EN/EN61000-4-8	Level 4, criteria A
PACKING		Voltage Dips and interruptions	BS EN/EN61000-4-11	> 95% dip 0. 5 periods, 30% dip 25 periods, > 95% interruptions 250 periods
NOTE		<ol style="list-style-type: none"> 1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. 2. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft). 3. The power supply is considered as an independent unit, but the final equipment still need to re-confirm that the whole system complies with the EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on http://www.meanwell.com) <p>※ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx</p>		

■ BLOCK DIAGRAM**■ Derating Curve**

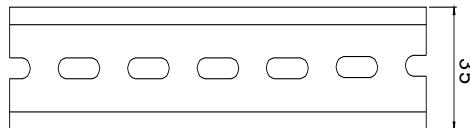


■ MECHANICAL SPECIFICATION

 ◎ ICL-28R(DIN Rail type)


Terminal Pin No. Assignment

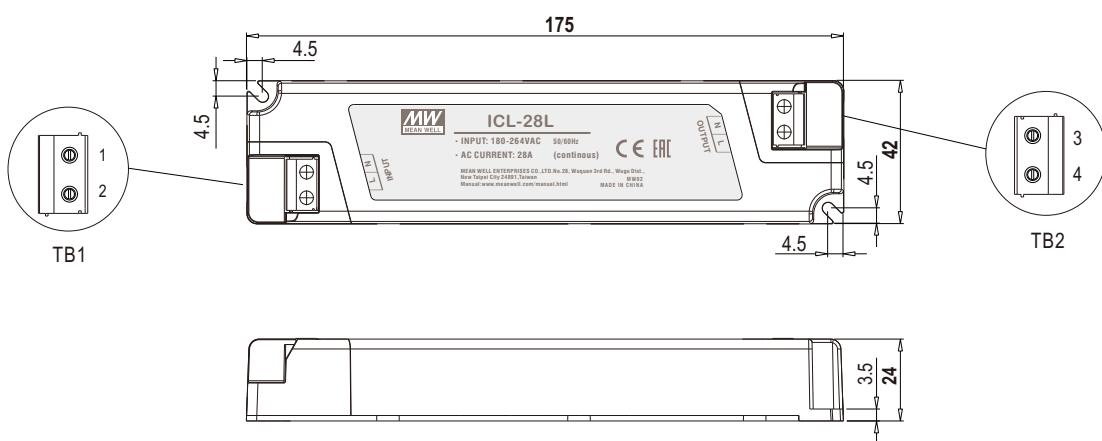
Pin No.	Assignment	Pin No.	Assignment
1	AC/N Input	3	AC/N Output
2	AC/L Input	4	AC/L Output



ADMISSIBLE DIN-RAIL:TS35/7.5 OR TS35/15

 ◎ ICL-28L(Linear type)

Case No.PLM-40 Unit:mm


 Terminal Pin No. Assignment (TB1,TB2)
 SWITCHLAB MB422-750 equivalent

Pin No.	Assignment	Pin No.	Assignment
1	AC/N Input	3	AC/N Output
2	AC/L Input	4	AC/L Output