



■ Features :

- Economical open frame design
- Wide input range
- High efficiency up to 97%
- Remote ON / OFF control
- Compact size 2.0"×1.024"×0.433"(SIP package)
- Protections: Short circuit / Overload / Over voltage
- -30~+85°C wide working temperature
- Cooling by free air convection
- Comply to BS EN/EN55032 ClassA without additional components
- Trimming output (optional)
- 3 years warranty

■ GTIN CODE

MW Search: <https://www.meanwell.com/serviceGTIN.aspx>


SPECIFICATION



ORDER NO.		NID65-5		NID65-12		NID65-15		NID65-24				
OUTPUT	DC VOLTAGE		5V		12V		15V		24V			
	CURRENT RANGE		0 ~ 6.5A		0 ~ 4.9A		0 ~ 4.3A		0 ~ 2.7A			
	RATED POWER		32.5W		58.8W		64.5W		64.8W			
	RIPPLE & NOISE (max.) Note.2		100mVp-p		120mVp-p		150mVp-p		200mVp-p			
	LINE REGULATION Note.3		±0.5%		±0.5%		±0.5%		±0.5%			
	LOAD REGULATION Note.4		±0.5%		±0.5%		±0.5%		±0.5%			
	VOLTAGE TOLERANCE		±2.0%		±2.0%		±2.0%		±2.0%			
	SWITCHING FREQUENCY (Typ.)		200KHz									
EXTERNAL CAPACITANCE LOAD (max.)		100uF / 16V low ESR		68uf/25V low ESR		47uf/50V low ESR		47uf/50V low ESR				
INPUT	VOLTAGE RANGE		10.5 ~ 53VDC		20 ~ 53VDC		20 ~ 53VDC		30 ~ 53VDC			
	NORMAL VOLTAGE		24VDC (or 12VDC or 48VDC)		24VDC (or 48VDC)		24VDC (or 48VDC)		48VDC			
	EFFICIENCY (Typ.)	24Vin	93% (12/24VDC)		96%		97%		-----			
		48Vin	92%		95%		95%		96%			
	DC CURRENT	Full load	3200mA/12VDC		2700mA/24VDC		3000mA/24VDC		1500mA/48VDC			
		No load	20mA		30mA		30mA		50mA			
PROTECTION		Fuse recommended (5A)										
PROTECTION	OVERLOAD (Typ.)		120 ~ 250% rated output power									
			Protection type : Hiccup mode, recovers automatically after fault condition is removed									
	OVER VOLTAGE		6.4 ~ 7.5V		15.6~ 18V		17.5~ 21V		28~ 33V			
			Protection type : Shut off o/p voltage, clamp by TVS diode									
	SHORT CIRCUIT		All output equipped with short circuit									
Protection type : Hiccup mode, recovers automatically after fault condition is removed												
FUNCTION	REMOTE CONTROL		Power on : 1.2VDC < R.C ~ com < 12VDC or open circuit ; power off : R.C ~ com < 0.4VDC or short circuit (PIN5,6 & PIN11)									
ENVIRONMENT	SAFETY STANDARDS		EAC TP TC 004 approved									
	WORKING TEMP.		-30 ~ +85℃ (Refer to "Derating Curve")									
	WORKING HUMIDITY		20% ~ 85% RH non-condensing									
	STORAGE TEMP.		-30 ~ +105℃									
	TEMP. COEFFICIENT		±0.03% / ℃ (0 ~ 55℃)									
	VIBRATION		10 ~ 500Hz, 2G 10min./1 cycle, period for 60min. each along X, Y, Z axes									
SAFETY & EMC	SAFETY STANDARD		BS EN/EN62368-1(LVD)									
	EMC EMISSION		Parameter		Standard		Test Level / Note					
			Conducted		BS EN/EN55032		Class A without external components,Class B with external components					
			Radiated		BS EN/EN55032		Class A without external components,Class B with external components					
	EMC IMMUNITY		BS EN/EN55035									
			Parameter		Standard		Test Level / Note					
			Radiated		BS EN/EN61000-4-3		Level 2, 3V/m ; criteria A					
			EFT / Burst		BS EN/EN61000-4-4		Level 2, 1KV ; criteria A					
			Surge		BS EN/EN61000-4-5		Level 2, 1KV/Line-Line,criteria A					
			Conducted		BS EN/EN61000-4-6		Level 2, 3V ; criteria A					
OTHERS	MTBF		16602.6K hrs min. Telcordia SR-332 (Bellcore) ; 890.7K hrs min. MIL-HDBK-217F (25℃)									
	DIMENSION		50.8*26*11mm or 2.0**1.024**0.433" inch (L*W*H)									
	WEIGHT		19g;280psc/6.32Kg/0.94CUFT									
NOTE	1.All parameters are specified at normal input, rated load, 25℃ 70% RH Ambient. 2.Ripple & noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1uf & 47uf capacitor. 3.Line regulation is measured from low line to high line at rated load. 4.Load regulation is measured from 10% to 100% rated load. ※ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx											


■ Connection diagram to obtain negative output voltage

Note: input voltage must be $< 30\text{VDC}$.

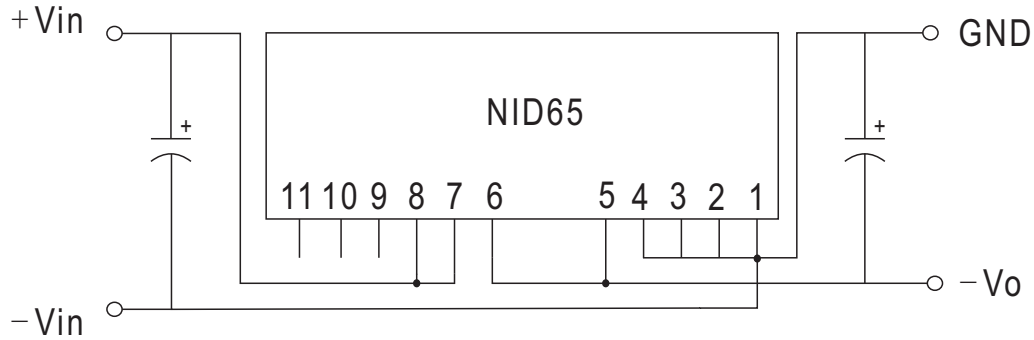


■ Derating Curve


NID65-5V

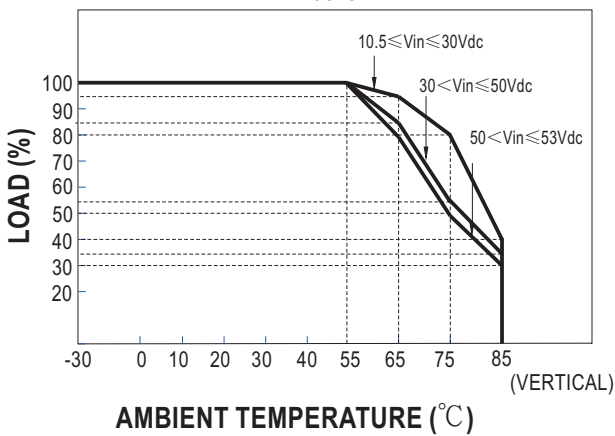

NID65-12V,15V

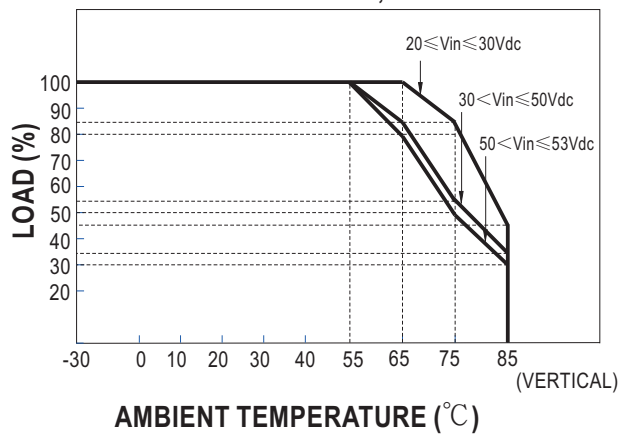


NID65-24V

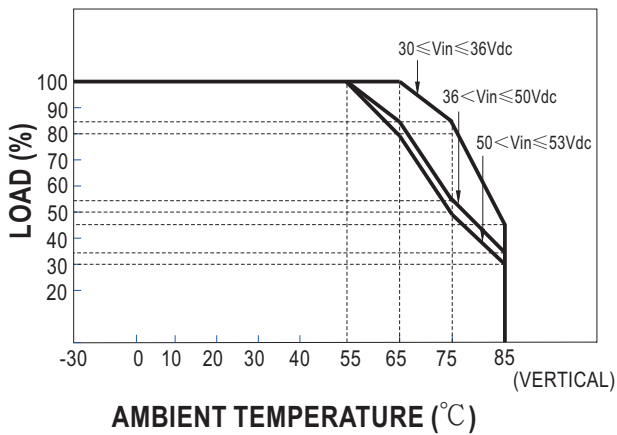

Mechanical Specification

Unit:mm(inch)

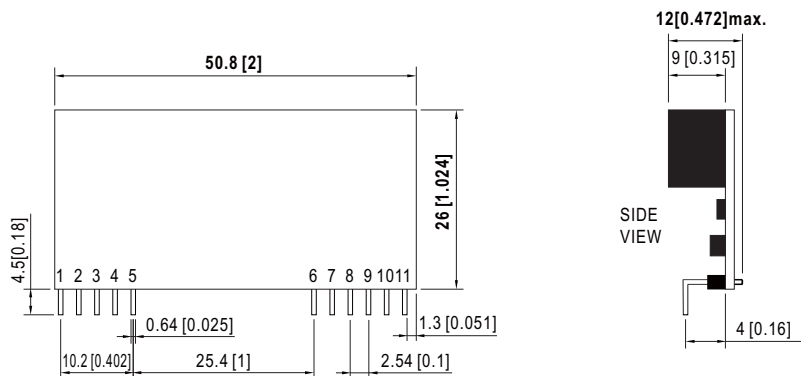


Pin Configuration

Pin No.	Pin_Out
1,2,3,4	+Vout
5,6	Com
7,8	+Vin
9	N.C.
10	Trim(optional)
11	R.C.

EMC Suggestion Circuit

※Comply to EN55032 Class A without additional componenets ,required external componenets to meet Class B emissssion are as below:

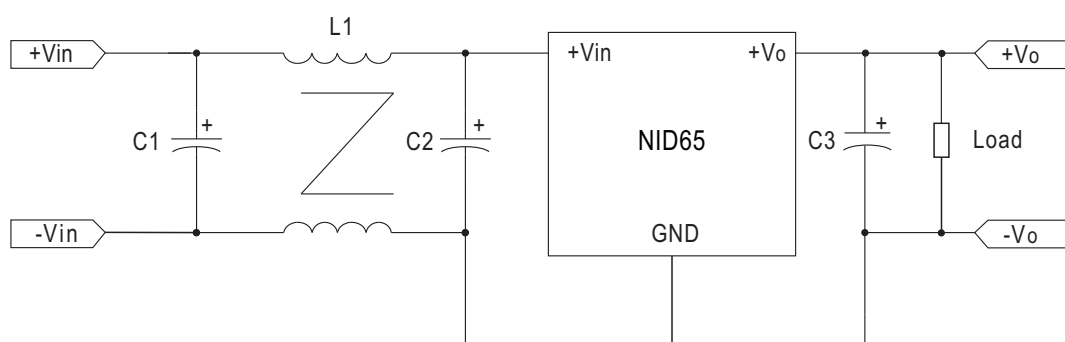

C1/C2	L1	C3
120 μ F/63V	15 μ H(NiZn)	22 μ F/35V