



## ■ Features

- Rastic housing with class II design
- Built-in active PFC function
- Class 2 power unit
- Standby power consumption <0.5W
- P67 rating for indoor or outdoor installations
- Function: 3 in 1 dimming (dim-to-off)
- Typical lifetime >50000hours
- 5 years warranty

## ■ Description


NPF-40D series is a 40W AC/DC LED driver featuring the constant current mode output.

NPF-40D operates from 90~305VAC and offers models with different rated voltage ranging between 12V and 54V. Thanks to the high efficiency up to 90%, with the fanless design, the entire series is able to operate for -40~+85°C case temperature under free air convection.

The entire series is rated with IP67 ingress protection level and is suitable to work for a variety of applications at dry, damp or wet locations. NPF-40D is equipped with the 3 in 1 dimming function so as to provide the design flexibility for LED lighting system.

## ■ Model Encoding

**NPF - 40 D -24**

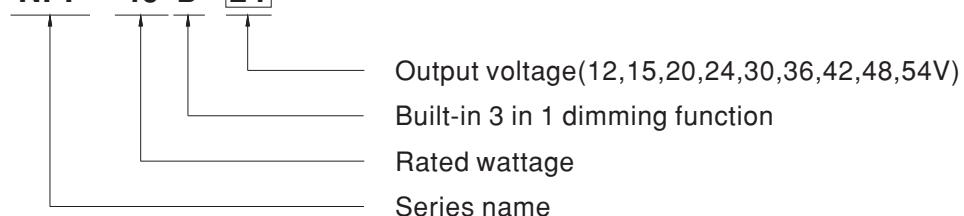


## ■ Applications


- LED panel lighting
- LED downlight
- LED decorative lighting
- LED tunnel lighting
- Moving sign
- Type "HL" for use in Class I, Division 2 hazardous (Classified) location

## SPECIFICATION

MODEL	NPF-40D-12	NPF-40D-15	NPF-40D-20	NPF-40D-24	NPF-40D-30	NPF-40D-36	NPF-40D-42	NPF-40D-48	NPF-40D-54	
OUTPUT	<b>RATED CURRENT</b>	3.34A	2.67A	2A	1.67A	1.34A	1.12A	0.96A	0.84A	0.76A
	<b>RATED POWER</b>	40.08W	40.08W	40W	40.08W	40.2W	40.32W	40.32W	40.32W	41.04W
	<b>CONSTANT CURRENT REGION</b>	7.2 ~ 12V	9 ~ 15V	12 ~ 20V	14.4 ~ 24V	18 ~ 30V	21.6 ~ 36V	25.2 ~ 42V	28.8 ~ 48V	32.4 ~ 54V
	<b>CURRENT RIPPLE</b>	5.0% max. @rated current								
	<b>CURRENT TOLERANCE</b>	±5.0%								
	<b>SET UP TIME</b> Note.3	500ms/115VAC, 230VAC								
INPUT	<b>VOLTAGE RANGE</b> Note.2	90 ~ 305VAC 127 ~ 431VDC (Please refer to "STATIC CHARACTERISTIC" section)								
	<b>FREQUENCY RANGE</b>	47 ~ 63Hz								
	<b>POWER FACTOR (Typ.)</b>	PF ≥ 0.97/115VAC, PF ≥ 0.95/230VAC, PF ≥ 0.92/277VAC@full load (Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section)								
	<b>TOTAL HARMONIC DISTORTION</b>	THD < 20%(@load ≥ 60%/115V, 230VAC; @load ≥ 75%/277VAC) (Please refer to "TOTAL HARMONIC DISTORTION(THD)" section)								
	<b>EFFICIENCY(Typ.)</b>	86%	87%	88%	89%	89%	90%	90%	90%	90%
	<b>AC CURRENT (Typ.)</b>	0.6A / 115VAC	0.3A / 230VAC	0.25A / 277VAC						
	<b>INRUSH CURRENT(Typ.)</b>	COLD START 50A(twidth=270μs measured at 50% Ipeak) at 230VAC; Per NEMA 410								
	<b>MAX. NO. of PSUs on 16A CIRCUIT BREAKER</b>	9 units (circuit breaker of type B) / 16 units (circuit breaker of type C) at 230VAC								
	<b>LEAKAGE CURRENT</b>	<0.25mA / 277VAC								
	<b>STANDBY POWER CONSUMPTION</b>	<0.5W								
PROTECTION	<b>OVER CURRENT</b>	95 ~ 108% Constant current limiting, recovers automatically after fault condition is removed								
	<b>SHORT CIRCUIT</b>	Hiccup mode, recovers automatically after fault condition is removed								
	<b>OVER VOLTAGE</b>	15 ~ 17V	17.5 ~ 21V	23 ~ 27V	28 ~ 34V	34 ~ 40V	41 ~ 46V	46 ~ 54V	54 ~ 60V	59 ~ 66V
		Shut down o/p voltage, re-power on to recover								
	<b>OVER TEMPERATURE</b>	Shut down o/p voltage, re-power on to recover								
ENVIRONMENT	<b>WORKING TEMP.</b>	Tcase=-40 ~ +85°C (Please refer to " OUTPUT LOAD vs TEMPERATURE" section)								
	<b>MAX. CASE TEMP.</b>	Tcase=+85°C								
	<b>WORKING HUMIDITY</b>	20 ~ 95% RH non-condensing								
	<b>STORAGE TEMP., HUMIDITY</b>	-40 ~ +80°C, 10 ~ 95% RH								
	<b>TEMP. COEFFICIENT</b>	±0.03%/°C (0 ~ 50°C)								
	<b>VIBRATION</b>	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes								
SAFETY & EMC	<b>SAFETY STANDARDS</b>	UL8750(type"HL"), UL879(for 12V,24V only), CSA C22.2 No. 250.13-12, ENEC EN61347-1, EN61347-2-13, EN62384 independent, IP67 approved ; Design refer to EN60335-1								
	<b>WITHSTAND VOLTAGE</b>	I/P-O/P:3.75KVAC								
	<b>ISOLATION RESISTANCE</b>	I/P-O/P:100M Ohms / 500VDC / 25°C / 70% RH								
	<b>EMC EMISSION</b>	Compliance to EN55015, EN61000-3-2 Class C (@ load ≥ 60%) ; EN61000-3-3								
	<b>EMC IMMUNITY</b>	Compliance to EN61000-4-2,3,4,5,6,8,11; EN61547, light industry level(surge immunity Line-Line 2KV)								
OTHERS	<b>MTBF</b>	1016.8K hrs min. Telcordia SR-332 (Bellcore) ; 314.44K hrs min. MIL-HDBK-217F (25°C)								
	<b>DIMENSION</b>	150*53*35mm (L*W*H)								
	<b>PACKING</b>	0.49Kg;30pcs/15.7Kg/1.0CUFT								
<b>NOTE</b>	1. All parameters NOT specially mentioned are measured at 230VAC input, rated current and 25°C of ambient temperature. 2. De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details. 3. Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time. 4. The standby power consumption is specified for 230VAC. 5. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again. 6. The model certified for CCC(GB19510.14, GB19510.1, GB17743 and GB17625.1) is an optional model . Please contact MEAN WELL for details. 7. This series meets the typical life expectancy of >50,000 hours of operation when Tcase, particularly $(t_c)$ point (or TMP, per DLC), is about 75°C or less. 8. Please refer to the warranty statement on MEAN WELL's website at <a href="http://www.meanwell.com">http://www.meanwell.com</a>									

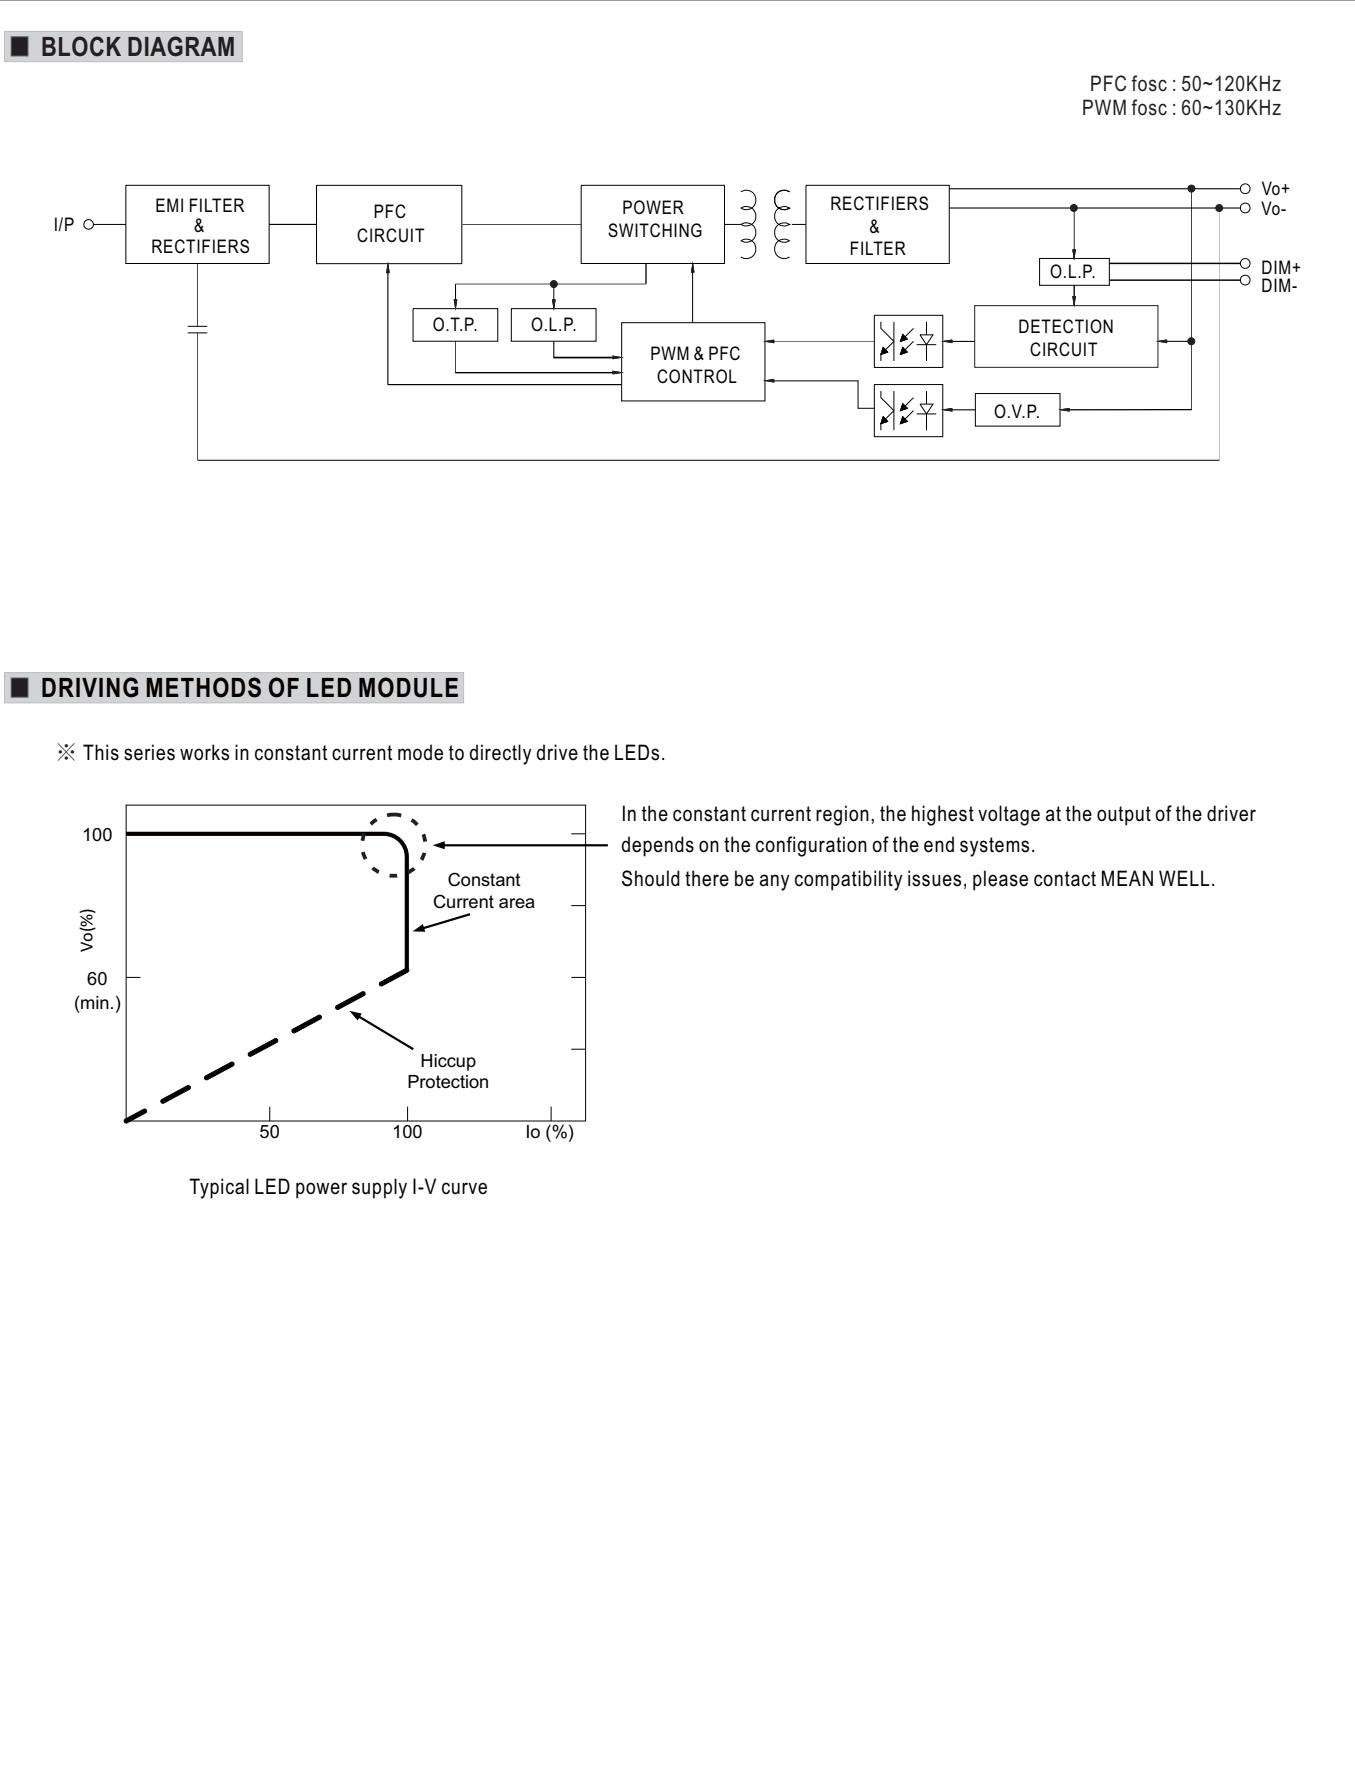



## ■ DIMMING OPERATION

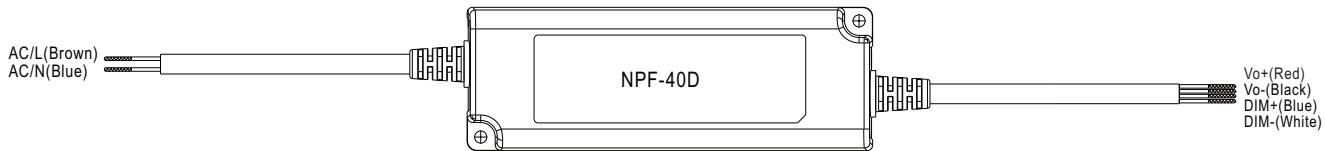



## ※ 3 in 1 dimming function

- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-:
  - 0 ~ 10VDC, or 10V PWM signal or resistance.
  - Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
  - Dimming source current from power supply: 100 $\mu$ A (typ.)



## ◎ Applying additive 0 ~ 10VDC

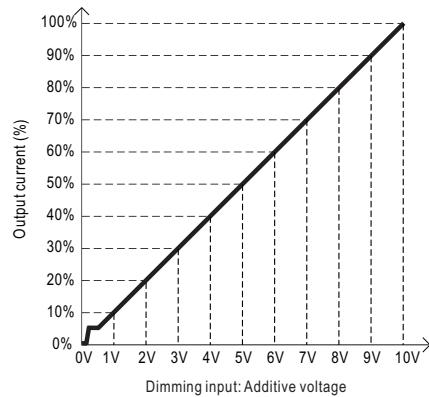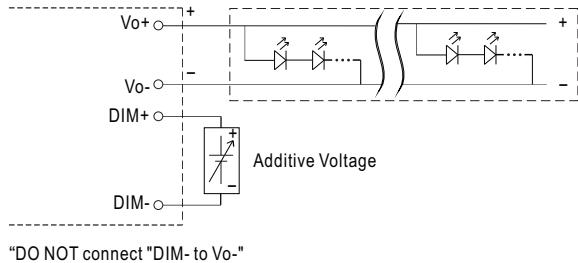

## ◎ Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):

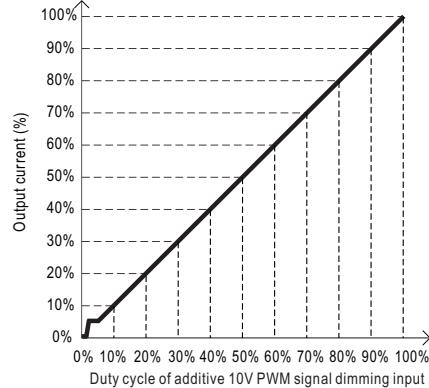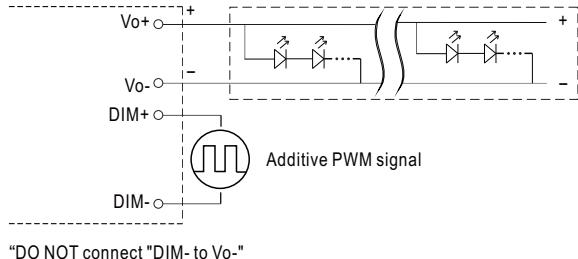



## ◎ Applying additive resistance:

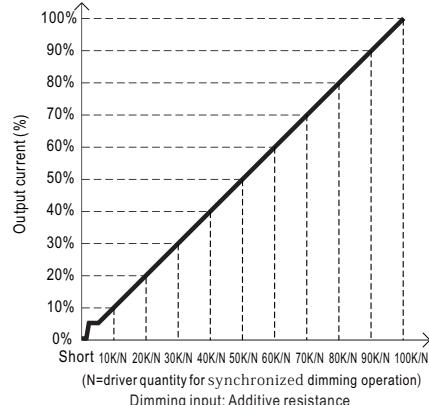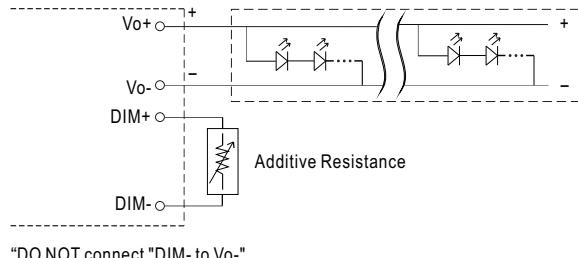


Note : 1. Min. dimming level is about 6% and the output current is not defined when 0% < Iout < 6%.

2. The output current could drop down to 0% when dimming input is about 0k $\Omega$  or 0Vdc, or 10V PWM signal with 0% duty cycle.

## ■ OUTPUT LOAD vs TEMPERATURE

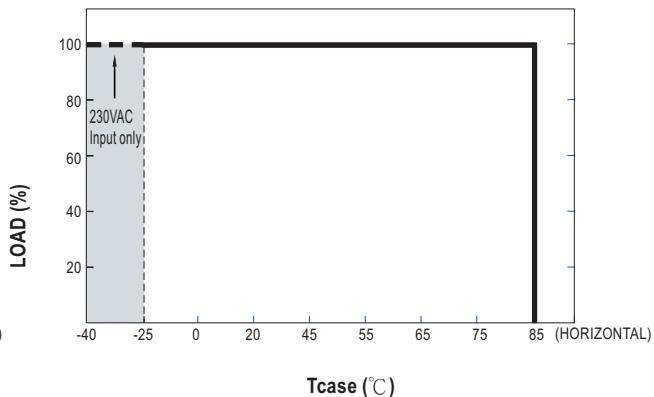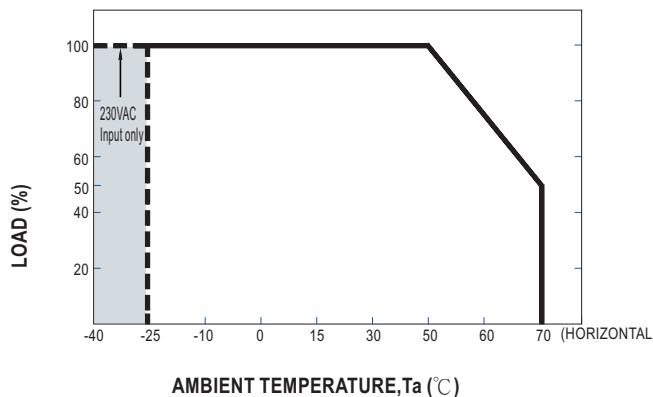


## ■ STATIC CHARACTERISTIC

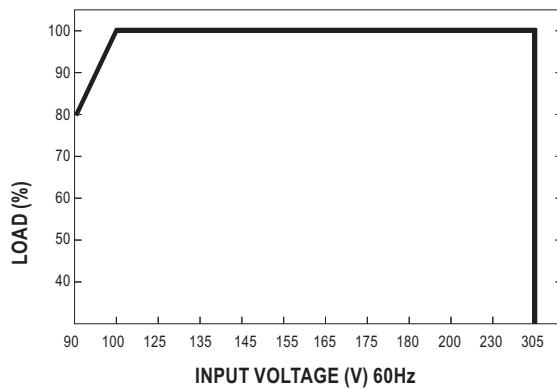


※ De-rating is needed under low input voltage.

## ■ POWER FACTOR (PF) CHARACTERISTIC

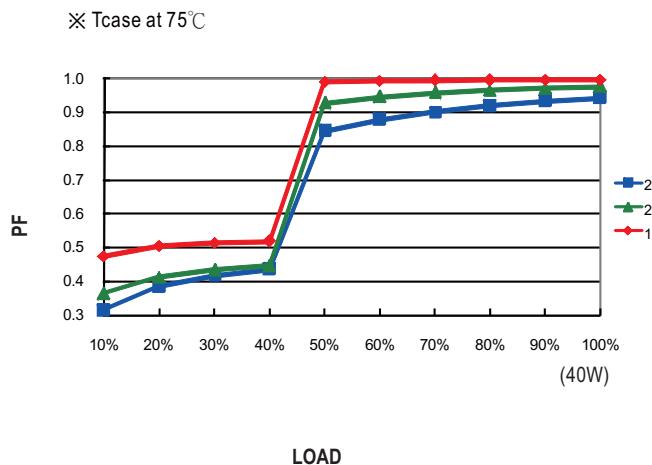

## ■ TOTAL HARMONIC DISTORTION (THD)


※ 48V Model, Tcase at 75°C

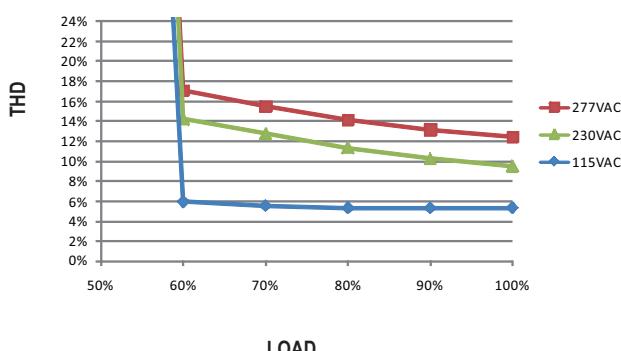


## ■ EFFICIENCY vs LOAD

NPF-40D series possess superior working efficiency that up to 90% can be reached in field applications.


※ 48V Model, Tcase at 75°C

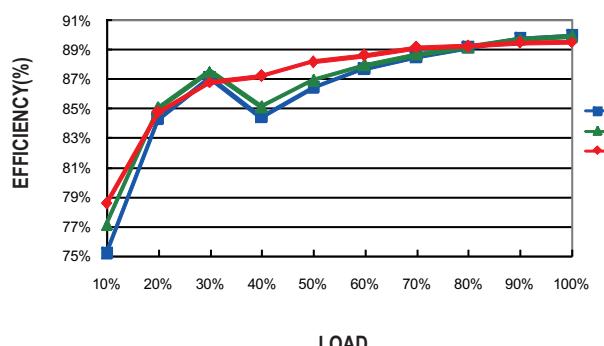

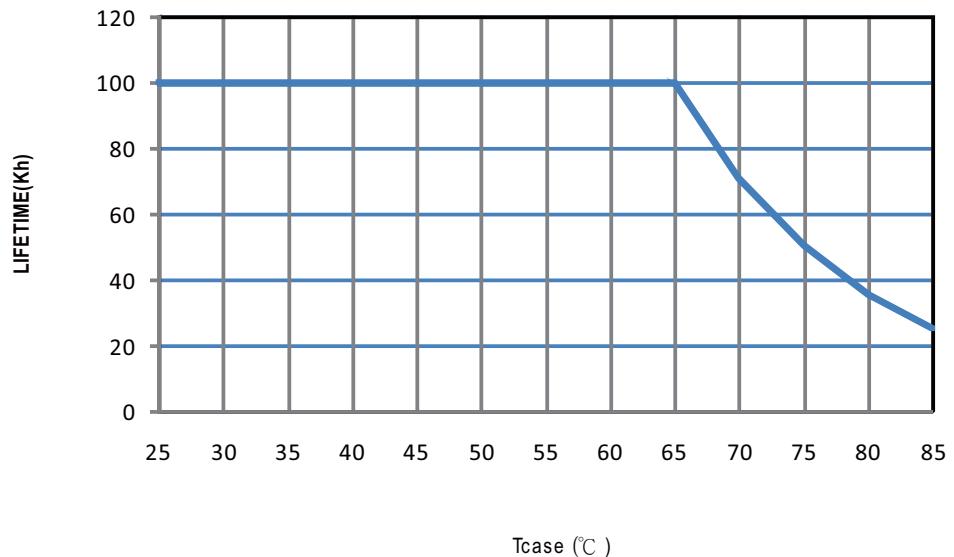**LIFE TIME**

**MECHANICAL SPECIFICATION**

Case No. NPF-60A      Unit:mm

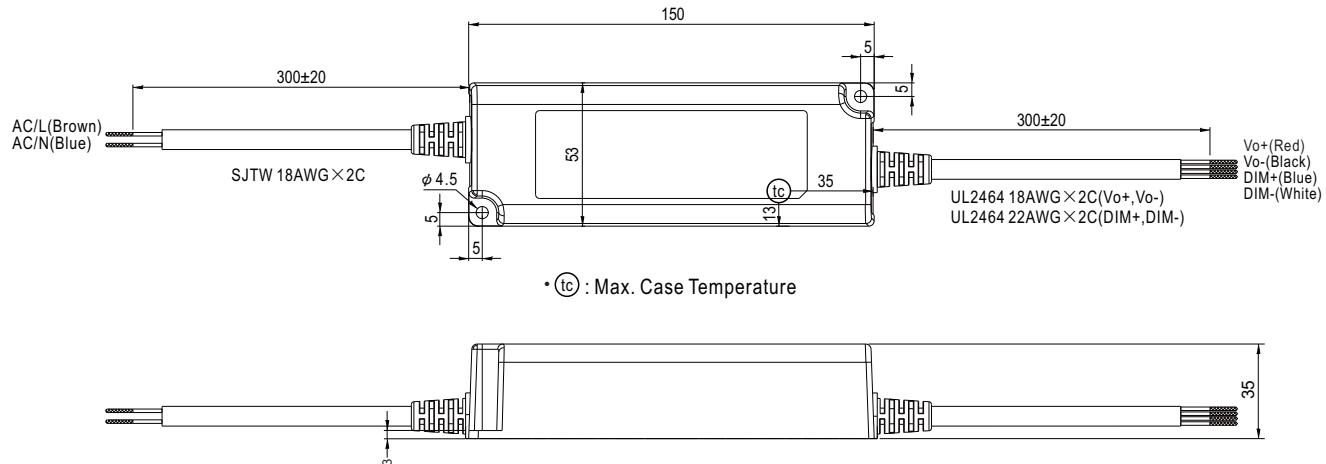**INSTALLATION MANUAL**Please refer to : <http://www.meanwell.com/manual.html>