


■ Features :


- Universal AC input / Full range
- 5"x3" compact size
- Protections: Short circuit / Overload / Over voltage
- Battery low protection / Battery polarity protection by fuse
- Relay contact signal output for AC OK and Battery low
- Cooling by free air convection
- 100% full load burn-in test
- 2 years warranty


SPECIFICATION

MODEL	PSC-100A		PSC-100B	
OUTPUT	OUTPUT NUMBER	CH1	CH2	CH1
	DC VOLTAGE	13.8V	13.8V	27.6V
	RATED CURRENT	4.75A	2.5A	2.4A
	CURRENT RANGE	0 ~ 7A	-----	0 ~ 3.5A
	RATED POWER	100W		100.74W
	RIPLKE & NOISE (max.) Note.2	100mVp-p	-----	100mVp-p
	VOLTAGE ADJ. RANGE	CH1: 12 ~ 15V		CH1: 24 ~ 29V
	VOLTAGE TOLERANCE Note.3	±1.0%	-----	±1.0%
	LINE REGULATION	±0.5%	-----	±0.5%
	LOAD REGULATION	±0.5%	-----	±0.5%
INPUT	SETUP, RISE TIME Note.5	2400ms, 20ms/230VAC		2400ms, 20ms/115VAC at full load
	HOLD UP TIME (Typ.)	40ms/230VAC	15ms/115VAC at full load	
PROTECTION	VOLTAGE RANGE	90 ~ 264VAC	127 ~ 370VDC	
	FREQUENCY RANGE	47 ~ 63Hz		
	EFFICIENCY (Typ.)	86%	88%	
	AC CURRENT (Typ.)	2A/115VAC	1.2A/230VAC	
	INRUSH CURRENT (Typ.)	COLD START 35A/115VAC	70A/230VAC	
	LEAKAGE CURRENT	<1mA / 240VAC		
PROTECTION	OVERLOAD	105 ~ 150% rated output power Protection type : Hiccup mode, recovers automatically after fault condition is removed		
	OVER VOLTAGE	CH1:14.49 ~ 18.63V		CH1:28.98 ~ 37.26V
	BATTERY CUT OFF	10±0.5V		20±1V
	AC OK Note.6	Relay contact output, ON : AC OK ; OFF : AC Fail ; Max. Rating : 30V / 1A		
ALARM FUNCTION	BATTERY LOW	Relay contact output, ON : Battery OK ; OFF : Battery Low ; Max. Rating : 30V / 1A		
		Battery low voltage : < 11V		Battery low voltage : < 22V
ENVIRONMENT	WORKING TEMP.	-20 ~ +70°C (Refer to output load derating curve)		
	WORKING HUMIDITY	20 ~ 90% RH non-condensing		
	STORAGE TEMP., HUMIDITY	-20 ~ +85°C, 10 ~ 95% RH		
	TEMP. COEFFICIENT	±0.03%/°C (0~50°C) on CH1 output		
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes		
SAFETY & EMC (Note 4)	SAFETY STANDARDS	UL60950-1, TUV EN60950-1 approved		
	WITHSTAND VOLTAGE	I/P-O/P:3KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC		
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH		
	EMI CONDUCTION & RADIATION	Compliance to EN55022 (CISPR22) Class B		
	HARMONIC CURRENT	Compliance to EN61000-3-2,-3		
	EMS IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8,11; ENV50204, EN55024, light industry level, criteria A		
OTHERS	MTBF	417.6K hrs min. MIL-HDBK-217F (25°C)		
	DIMENSION	127*76.2*31mm (L*W*H)		
	PACKING	0.23Kg; 63pcs/15.5Kg/1.35CUFT		
NOTE	1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. 3. Tolerance : includes set up tolerance, line regulation and load regulation. 4. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives. 5. Length of set up time is measured at cold first start. Turning ON/OFF the power supply may lead to increase of the set up time. 6. Please refer to suggest application (2) & (4) in page 3. 7. Heat sink HS2,HS3 can not be shorted. 8. Heat sink HS2,HS3 must have safety isolation distance with system case.			

Mechanical Specification

Unit:mm

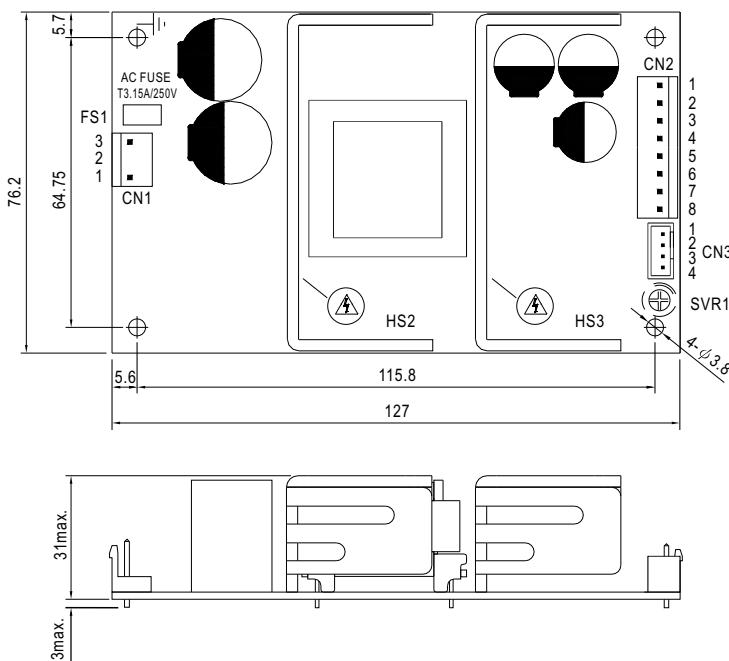

AC Input Connector (CN1) : JST B3P-VH or equivalent

Pin No.	Assignment	Mating Housing	Terminal
1	AC/N	JST VHR or equivalent	JST SVH-21T-P1.1 or equivalent
2	No Pin		
3	AC/L		

DC Output Connector (CN2) : JST B8P-VH or equivalent




Pin No.	Assignment	Mating Housing	Terminal
1,2	-V	JST VHR or equivalent	JST SVH-21T-P1.1 or equivalent
3,4	+V		
5,6	Bat+		
7,8	Bat-		

Alarm Output Connector(CN3) : JST B4B-XH or equivalent

Pin No.	Assignment	Mating Housing	Terminal
1,2	AC OK	JST XHP or equivalent	JST SXH-001T-P0.6 or equivalent
3,4	Bat. Low		



- 1.HS2,HS3 can not be shorted.
- 2.HS2,HS3 must have safety isolation distance with system case.
- 3.-V and Bat- can not be shorted.

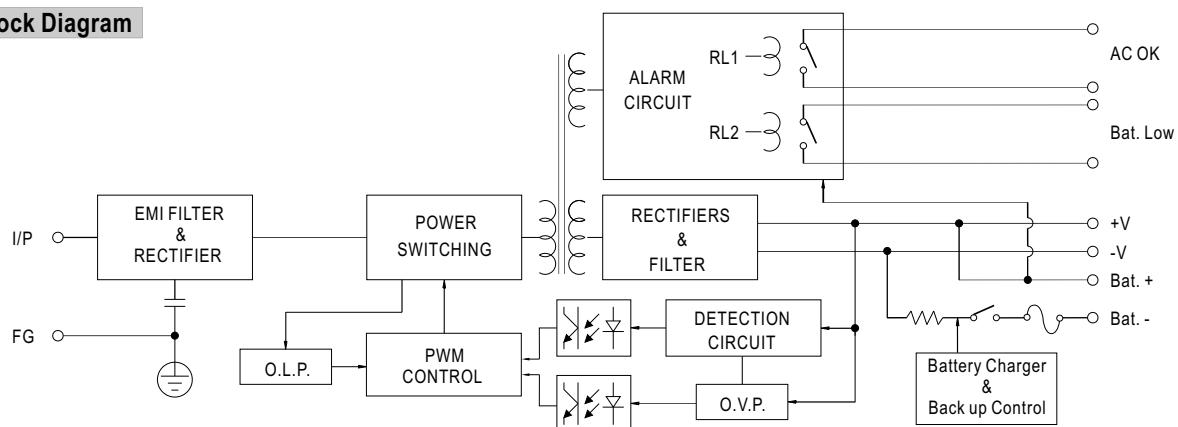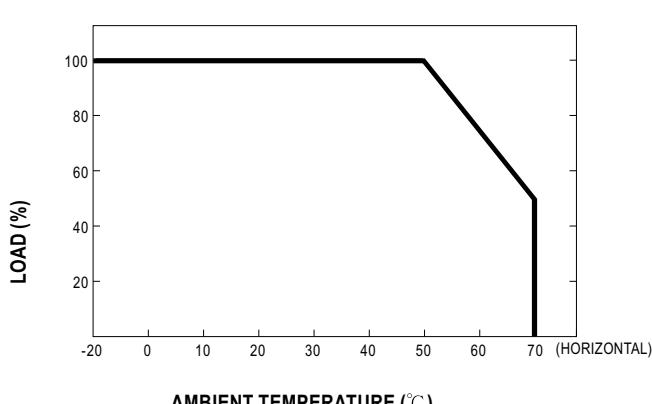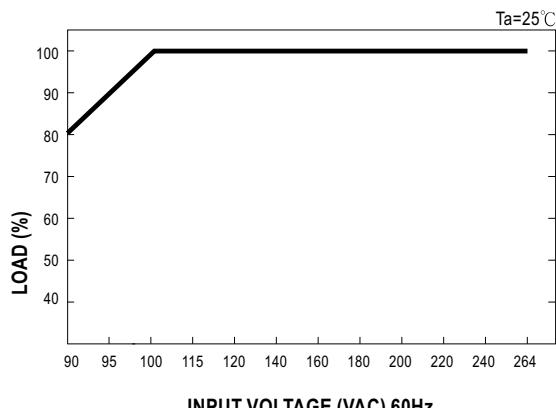Block Diagram

Output Derating

Output Derating VS Input Voltage


■ Suggested Application

1. Back up connection for AC interruption

(1) Please refer to the Fig1.1 for suggested connection.

The power supply charge the battery and provide energy to the load in the same time when the AC main is OK.

The battery start to supply power to the load when the AC main fails.

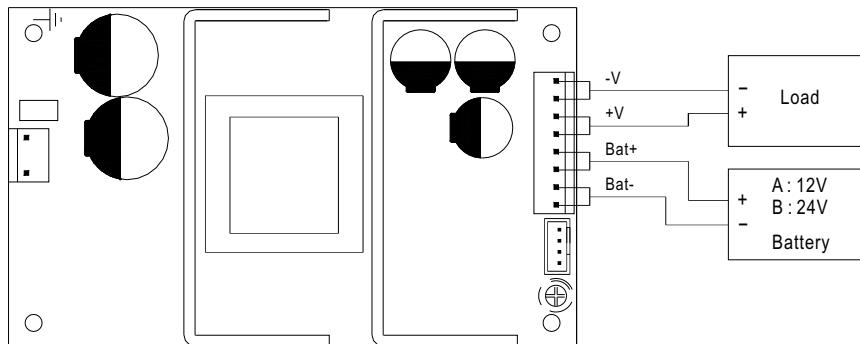


Fig 1.1 Suggested system connection

2. Alarm Signal for AC OK and Battery Low

(1) Alarm Signal is sent out through "AC OK" & "Battery Low" pins.

(2) An external voltage source is required for this function. The maximum applied voltage is 30V and the maximum sink current is 1A.


(3) Table2.1 explain the alarm function built-in the power supply

Function	Description	Output of alarm
AC OK	The signal is "Low" when the power supply turns on	Low or short
	The signal turns to be "High" when the power supply turns OFF	High or open(External applied voltage 1A max.)
Battery Low	The signal is "Low" when the voltage of battery is under A:11V, B:22V	Low or short
	The signal is "High" when the voltage of battery is above A:11V, B:22V	High or open(External applied voltage 1A max.)

Table 2.1 Explanation of Alarm Signal

AC OK (Battery low)

CN3 Pin1(Pin3)



CN3 Pin2(Pin4)

External voltage and R

(The max. Sink is 1A and 30V)

Fig 2.2 Internal circuit of AC OK (Battery Low)

(4) RL1(AC OK)signal will go into hiccup mode when the overload protection is activating.