

EAC **CE** **UKCA**
TPTC020



■ Features

- SIP8 package with industry standard pinout
- 8:1(9~75Vdc) ultra-wide input range
- Operating temperature range -40 ~ +95°C
- No minimum load required
- Comply to BS EN/EN55032 radiated Class A without additional components
- High efficiency up to 83%
- Protections: Short circuit (Continuous) / Overload / UVLO
- 3KVdc I/O isolation
- Remote ON/OFF control
- 3 years warranty

■ Applications

- Telecom/datacom system
- Wireless network
- Industrial control facility
- Instrument
- Analyzer
- Detector
- Data switch


■ GTIN CODE

MW Search: <https://www.meanwell.com/serviceGTIN.aspx>

■ Description

SPAN02W8 and DPAN02W8 series are 2W isolated and regulated module type DC-DC converter with SIP8 package. It features international standard pins, a high efficiency up to 83%, wide working temperature range -40~+95°C, 3KVdc I/P-O/P isolation voltage, compliance to BS EN/EN55032 radiated class A without additional components, overload and continuous-mode short circuit protection, etc. The models account for 9~75Vdc 8:1 ultra-wide input range, and various output voltage, 3.3V/5V/12V/15V for single output and ±5V/±12V/±15V for dual outputs, which are suitable for all kinds of systems, such as industrial control, telecommunication field, distributed power architecture, and so on.

■ Model Encoding

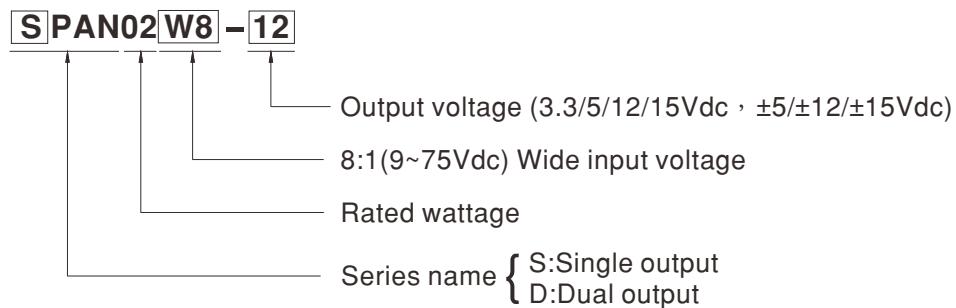



MODEL SELECTION TABLE

ORDER NO.	INPUT			OUTPUT		EFFICIENCY (TYP.)	CAPACITOR LOAD (MAX.)		
	INPUT VOLTAGE (RANGE)	INPUT CURRENT		OUTPUT VOLTAGE	OUTPUT CURRENT				
		NO LOAD	FULL LOAD						
SPAN02W8-03	Nominal 12V, 24V, 36V, 48V, 72V (9 ~ 75V)	6mA	45mA	3.3V	0 ~ 500mA	77%	500µF		
SPAN02W8-05		4mA	52mA	5V	0 ~ 400mA	80%	400µF		
SPAN02W8-12		8mA	50mA	12V	0 ~ 167mA	83%	167µF		
SPAN02W8-15		12mA	50mA	15V	0 ~ 134mA	83%	134µF		
DPAN02W8-05		8mA	52mA	±5V	±0 ~ 200mA	80%	*200µF		
DPAN02W8-12		12mA	51mA	±12V	±0 ~ 83mA	82%	*83µF		
DPAN02W8-15		12mA	51mA	±15V	±0 ~ 67mA	82%	*67µF		

* For each output

SPECIFICATION

INPUT

VOLTAGE RANGE	9~75Vdc
SURGE VOLTAGE (100ms max.)	100Vdc
FILTER	Capacitor
PROTECTION	Fuse recommended. 1000mA Slow-Blow Type.
INTERNAL POWER DISSIPATION	500mW

OUTPUT

VOLTAGE ACCURACY	±1.5%
RATED POWER	2W
RIPPLE & NOISE Note.2	75mVp-p
LINE REGULATION Note.3	±0.5%
LOAD REGULATION Note.4	Single output models: ±0.5%, Dual output models: ±1%
CROSS REGULATION	±5% @ 25%~100% Load only dual output
SWITCHING FREQUENCY (Typ.)	450KHz

PROTECTION

SHORT CIRCUIT	Protection type : Continuous, automatic recovery	
OVERLOAD	110 ~ 230% rated output power	
UNDER VOLTAGE LOCKOUT	Start-up voltage	8.8Vdc
	Shutdown voltage	8Vdc (Typ.)

FUNCTION

REMOTE CONTROL	Power ON: R.C. ~ -Vin <1.2Vdc or open circuit; Power OFF: R.C. ~ -Vin >5.5 ~ 15Vdc
----------------	--

ENVIRONMENT

COOLING	Free-air convection	
WORKING TEMP.	-40 ~ +95°C (Refer to "Derating Curve")	
CASE TEMPERATURE	+110°C max.	
WORKING HUMIDITY	20% ~ 90% RH non-condensing	
STORAGE TEMP., HUMIDITY	-55 ~ +125°C, 10 ~ 95% RH non-condensing	
TEMP. COEFFICIENT	0.03% / °C (0 ~ 95°C)	
SOLDERING TEMPERATURE	1.5mm from case of 1 ~ 3sec./260°C max.	
VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes	

SAFETY & EMC (Note.5)

SAFETY STANDARDS	EAC TP TC 020/2011 approved		
WITHSTAND VOLTAGE	I/P-O/P:3KVdc		
ISOLATION RESISTANCE	I/P-O/P:1000M Ohms / 500Vdc / 25°C / 70% RH		
ISOLATION CAPACITANCE (Typ.)	1000pF		
EMC EMISSION	Parameter	Standard	Test Level / Note
	Conducted	BS EN/EN55032(CISPR32)	Class A/B with additional components
EMC IMMUNITY	Radiated	BS EN/EN55032(CISPR32)	Class A without additional components Class B with additional components
	Parameter	Standard	Test Level / Note
	ESD	BS EN/EN61000-4-2	Level 2, ±8KV air, ±4KV contact
	Radiated Susceptibility	BS EN/EN61000-4-3	Level 2, 3V/m
	EFT/Bursts	BS EN/EN61000-4-4	Level 1, 0.5KV
	Surge	BS EN/EN61000-4-5	Level 2, 0.5KV Line-Line
	Conducted	BS EN/EN61000-4-6	Level 2, 3V(e.m.f.)
	Magnetic Field	BS EN/EN61000-4-8	Level 1, 1A/m

OTHERS


MTBF	1850Khrs MIL-HDBK-217F(25°C)
DIMENSION (L*W*H)	21.8*9.2*11.1mm (0.86*0.36*0.44 inch)
CASE MATERIAL	Non-Conductive black plastic (UL 94V-0 rated)
PACKING	4.8g ; 14pcs/per tube, 2058pcs/147 tube/per carton

NOTE

- All parameters are specified at normal input(48Vdc), rated load, 25°C 70% RH ambient.
- Ripple & noise are measured at 20MHz by using a 12' twisted pair terminated with a 0.1μf & 47μf capacitor.
- Line regulation is measured from low line to high line at rated load.
- Load regulation is measured from 0% to 100% rated load.
- The final equipment must be re-confirm that it still meet EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies."(as available on <http://www.meanwell.com>)


※ Product Liability Disclaimer : For detailed information, please refer to <https://www.meanwell.com/serviceDisclaimer.aspx>

■ Derating Curve

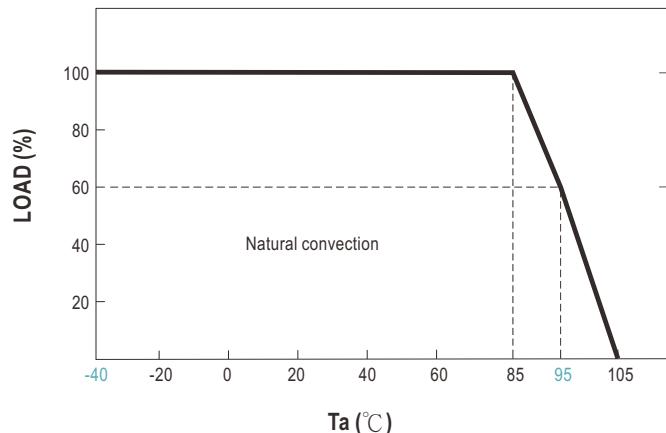

■ EMC Suggestion Circuit


※ EMC Considerations EMI Test standard: BS EN/EN55032 Class A/B Conduct and BS EN/EN55032 Class B Radiation test conditions
recommendations: Input Voltage: Nominal, Output Load: Full Load

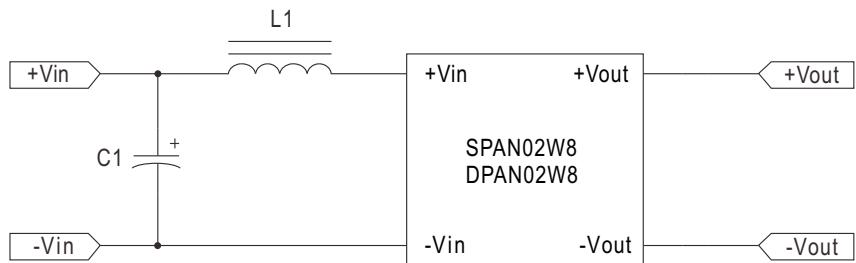

Model No.	BS EN/EN55032 Class A(Conduction)		BS EN/EN55032 Class B(Conduction)	
	C1	L1	C1	L1
SPAN02W8 DPAN02W8	2.2uF/100V X7R 10% R TDK 1210	10μH	2.2uF/100V X7R 10% R TDK 1210	22μH
BS EN/EN55032 Class A(Radiation)		BS EN/EN55032 Class B(Radiation)		
C1	L1	C1	L1	
NC	NC	2.2uF/100V X7R 10% R TDK 1210	22μH	

■ Mechanical Specification


- All dimensions in mm(inch)
- Tolerance: $x.x \pm 0.5\text{mm}$ ($x.xx \pm 0.02''$)
- Pin pitch tolerance: $\pm 0.05\text{mm}$ ($\pm 0.002''$)

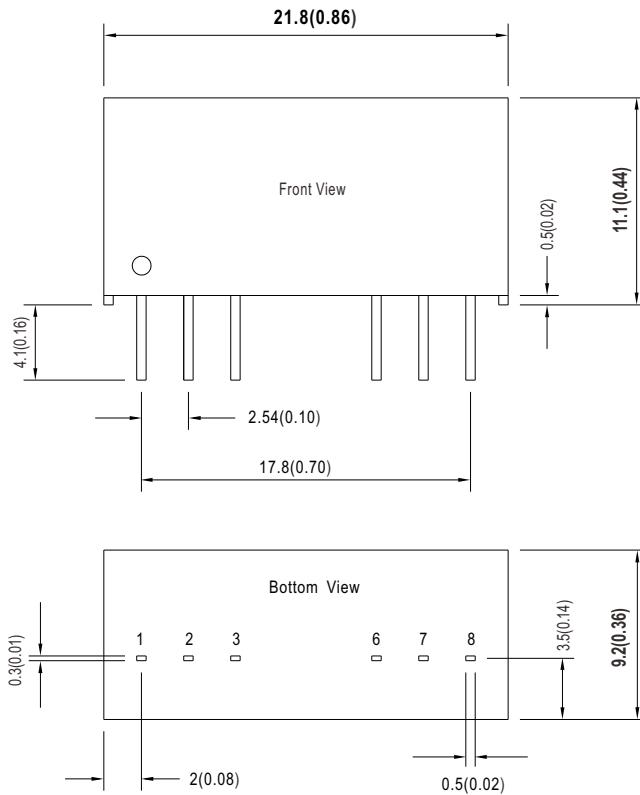


■ Plug Assignment

Pin-Out		
Pin No.	SPAN02W8 (Single output)	DPAN02W8 (Dual output)
1	-Vin	-Vin
2	+Vin	+Vin
3	R.C.	R.C.
6	+Vout	+Vout
7	-Vout	Common
8	N.C.	-Vout

* N.C. : No connected

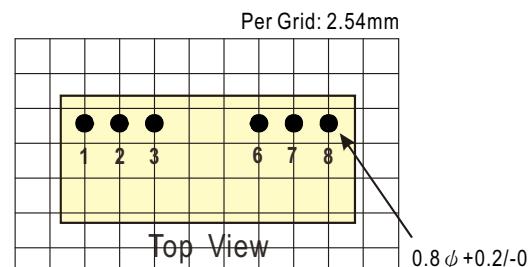

■ Packing

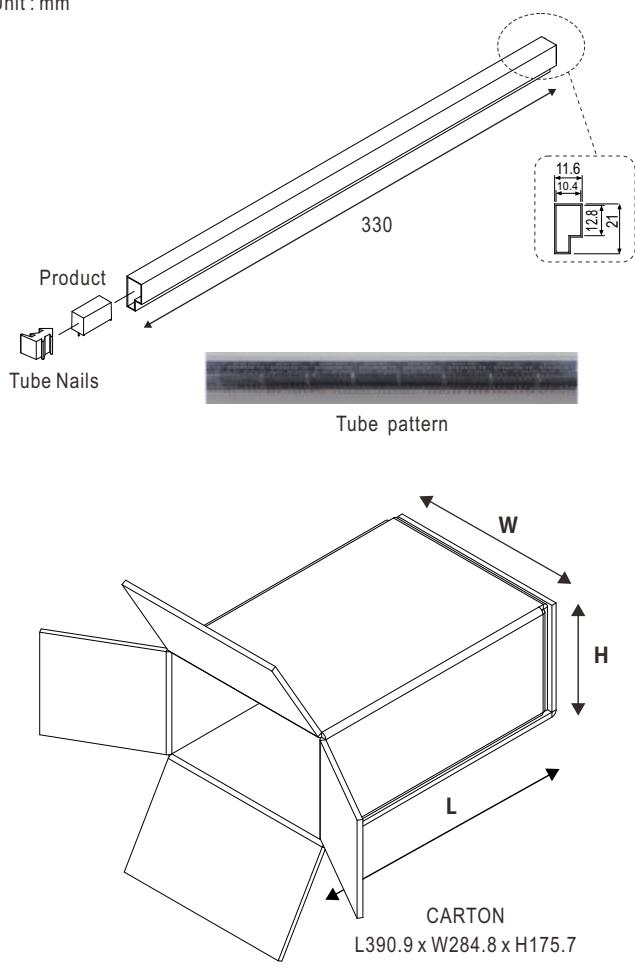Standard Tube Packing	MPQ Per Tube (PCS)	One Tube G.W.	Max. Q'TY/ Carton(PCS)	One Carton G.W.
Unit : mm  <p>Product</p> <p>Tube Nails</p> <p>Tube pattern</p> <p>CARTON L390.9 x W284.8 x H175.7</p>	14	78.7g	2058	13.57Kg

■ Installation Manual

Please refer to : <http://www.meanwell.com/manual.html>