



■ Features :

- Universal AC input/Full range
- Low leakage current<0.5mA
- Protections: Short circuit / Overload / Over voltage
- Cooling by free air convection
- 100% full load burn-in test
- Fixed switching frequency at 65KHz
- 2 years warranty




SPECIFICATION

MODEL	PT-65A			PT-65B			PT-65C			PT-65D													
OUTPUT	OUTPUT NUMBER	CH1	CH2	CH3	CH1	CH2	CH3	CH1	CH2	CH3	CH1	CH2	CH3										
	DC VOLTAGE	5V	12V	-5V	5V	12V	-12V	5V	15V	-15V	5V	12V	24V										
	RATED CURRENT	5.5A	2.5A	0.5A	5.5A	2.5A	0.5A	5.5A	2A	0.5A	4A	2A	1A										
	CURRENT RANGE	0.4 ~ 7A	0.2 ~ 3.2A	0 ~ 0.7A	0.4 ~ 7A	0.2 ~ 3.2A	0 ~ 0.7A	0.4 ~ 7A	0.2 ~ 2.6A	0 ~ 0.7A	0.5 ~ 5A	0.2 ~ 4A	0.2 ~ 1.3A										
	RATED POWER	60W			63.5W			65W			68W												
	OUTPUT POWER (max.)	Rated output power for convection; 72W with 18CFM min. Forced air																					
	ripple & noise (max.) Note.2	50mVp-p	120mVp-p	50mVp-p	50mVp-p	120mVp-p	100mVp-p	50mVp-p	120mVp-p	100mVp-p	50mVp-p	100mVp-p	200mVp-p										
	VOLTAGE ADJ. RANGE	CH1:4.75 ~ 5.5V																					
	VOLTAGE TOLERANCE Note.3	±4.0%	±7.0%	±5.0%	±4.0%	±7.0%	±5.0%	±4.0%	±7.0%	±5.0%	±4.0%	±6.0%	±6.0%										
	LINE REGULATION	±1.0%	±2.0%	±1.0%	±1.0%	±2.0%	±1.0%	±1.0%	±2.0%	±1.0%	±1.0%	±2.0%	±3.0%										
	LOAD REGULATION	±3.0%	±4.0%	±1.0%	±3.0%	±4.0%	±1.0%	±3.0%	±4.0%	±1.0%	±2.0%	±5.0%	±5.0%										
	SETUP, RISE TIME	800ms, 20ms at full load																					
	HOLD UP TIME (Typ.)	60ms at full load																					
INPUT	VOLTAGE RANGE	90 ~ 264VAC 127 ~ 370VDC																					
	FREQUENCY RANGE	47 ~ 440Hz																					
	EFFICIENCY(Typ.)	76%		77%		77%		79%															
	AC CURRENT (Typ.)	1.5A/115VAC		0.9A/230VAC																			
	INRUSH CURRENT (Typ.)	COLD START 20A/115VAC		40A/230VAC																			
PROTECTION	LEAKAGE CURRENT	<0.75mA																					
	OVERLOAD	73 ~ 95W rated output power						74.8 ~ 98.6W rated output power															
		Protection type : Hiccup mode, recovers automatically after fault condition is removed.																					
OVER VOLTAGE		5.75 ~ 6.75VDC on CH1																					
		Protection type : Hiccup mode, recovers automatically after fault condition is removed.																					
ENVIRONMENT	WORKING TEMP.	-10 ~ +60°C (Refer to output load derating curve)																					
	WORKING HUMIDITY	20 ~ 90% RH non-condensing																					
	STORAGE TEMP., HUMIDITY	-20 ~ +85°C, 10 ~ 95% RH																					
	TEMP. COEFFICIENT	±0.04%/°C (0 ~ 50°C) on +5V output																					
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, Period for 60min.each along X, Y, Z axes																					
SAFETY & EMC (Note 4)	SAFETY STANDARDS	UL60950-1, TUV EN60950-1 Approved																					
	WITHSTAND VOLTAGE	I/P-O/P:3KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC 1min.																					
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms/500VDC																					
	EMI CONDUCTION & RADIATION	Compliance to EN55022 (CISPR22) Class B																					
	HARMONIC CURRENT	Compliance to EN61000-3-2,-3																					
OTHERS	EMS IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8,11; ENV50204, EN55024, Light industry level, criteria A																					
	MTBF	277.2K hrs min. MIL-HDBK-217F (25°C)																					
	DIMENSION	127*76*42mm (L*W*H)																					
NOTE	PACKING	0.25Kg; 54pcs/15.9Kg/1.35CUFT																					
		1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. 3. Tolerance : includes set up tolerance, line regulation and load regulation. 4. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives. 5. Mounting holes M1 and M2 should be grounded for EMI purposes.																					

■ Mechanical Specification

Unit:mm

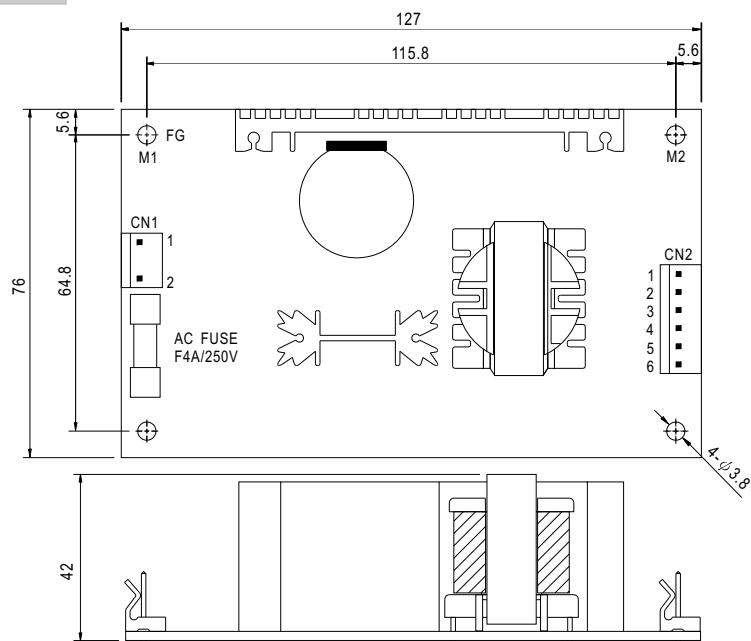

AC Input Connector (CN1) : Molex 5277-02 or equivalent


Pin No.	Assignment	Mating Housing	Terminal
1	AC/N	Molex 5195 or equivalent	Molex 5194 or equivalent
2	AC/L		

DC Output Connector (CN2) : Molex 5273-06 or equivalent


Pin No.	Assignment	Mating Housing	Terminal
1	V2		
2,3	+5V	Molex 5195 or equivalent	Molex 5194 or equivalent
4,5	COM		
6	V3		

※PIN2:+5V PIN3,4,5:COM only for PT-65D

■ Block Diagram

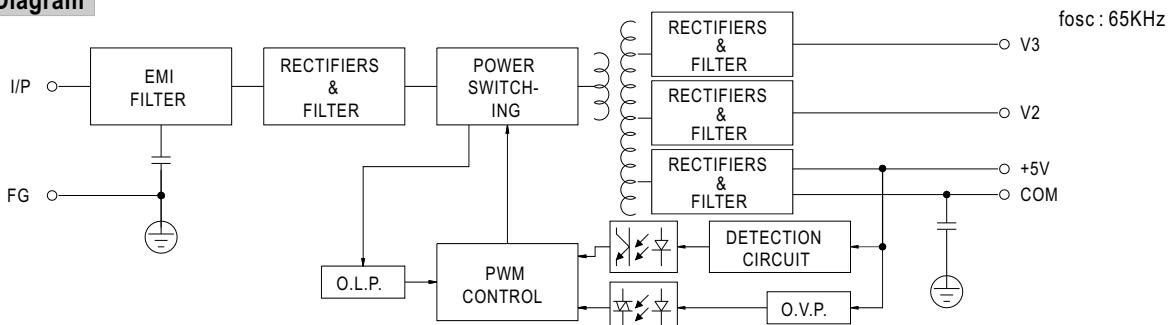

■ Derating Curve

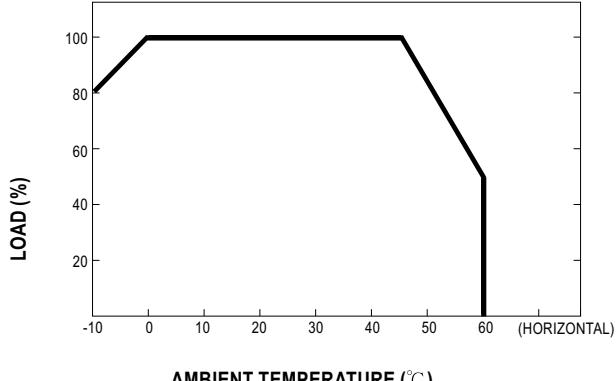

■ Static Characteristics (B)

