



■ Features :

- Universal AC input / Full range
- Built-in active PFC function
- High efficiency up to 93%
- Withstand 300VAC surge input for 5 seconds
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Built-in 12V/0.5A auxiliary output
- 5"x3" compact size
- Free air convection for 200W and 300W with 20.5 CFM forced air
- With power good and fail signal output
- Built-in remote sense function
- No load power consumption under 0.5W by PS-ON control
- Standby 5V@1A with fan, @ 0.6A without fan
- 3 years warranty




• BULLETIN 1647 APPROVED



SPECIFICATION

MODEL	EPP-300-12	EPP-300-15	EPP-300-24	EPP-300-27	EPP-300-48		
OUTPUT	DC VOLTAGE	12V	15V	24V	27V		
	RATED CURRENT (20.5CFM)	25A	20A	12.5A	11.12A		
	CURRENT RANGE (convection)	0 ~ 16.67A	0 ~ 13.33A	0 ~ 8.33A	0 ~ 7.4A		
	CURRENT RANGE (20.5CFM)	0 ~ 25A	0 ~ 20A	0 ~ 12.5A	0 ~ 11.12A		
	RATED POWER (convection)	200W	200W	199.9W	199.8W		
	RATED POWER (20.5CFM)	300W	300W	300W	200.2W		
	ripple & noise (max.) Note.2	120mVp-p	120mVp-p	150mVp-p	200mVp-p		
	VOLTAGE ADJ. RANGE	Main output:11.4 ~ 12.6V	Main output:14.25 ~ 15.75V	Main output:22.8 ~ 25.2V	Main output:25.65 ~ 28.35V		
	VOLTAGE TOLERANCE Note.3	±3.0%	±3.0%	±2.0%	±2.0%		
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%		
INPUT	LOAD REGULATION	±1.0%	±1.0%	±1.0%	±1.0%		
	SETUP, RISE TIME	2500ms, 30ms/230VAC	3000ms, 30ms/115VAC at full load				
	HOLD UP TIME (Typ.)	13ms/230VAC/115VAC at full load					
	VOLTAGE RANGE Note.5	90 ~ 264VAC	127 ~ 370VDC				
	FREQUENCY RANGE	47 ~ 63Hz					
	POWER FACTOR (Typ.)	PF>0.93/230VAC	PF>0.98/115VAC at full load				
	EFFICIENCY (Typ.)	90%	90%	92.5%	93%		
PROTECTION	AC CURRENT (Typ.)	3.5A/115VAC	1.8A/230VAC				
	INRUSH CURRENT (Typ.)	COLD START 40A/115VAC					
	LEAKAGE CURRENT	<2mA/240VAC					
	OVERLOAD	105 ~ 135% rated output power Protection type : Hiccup mode, recovers automatically after fault condition is removed					
	OVER VOLTAGE	13.5 ~ 15V	16.2 ~ 18.5V	26 ~ 30V	29.5 ~ 33.5V		
		Protection type : Shut down o/p voltage, re-power on to recover					
	OVER TEMPERATURE	110°C ±5°C (TSW1) detect on heatsink of power transistor	115±5°C (12V,15V),85±5°C (24V,27V,48V) (TSW2) detect on heatsink of output diode	Protection type : (TSW1) Shut down o/p voltage, recovers automatically after temperature goes down			
FUNCTION		Protection type : (TSW2) Shut down o/p voltage, re-power on to recover					
	5V STANDBY	5VSB : 5V@0.6A without fan, 1A with fan 20.5CFM ; tolerance ± 2%, ripple : 150mVp-p(max.)					
	AUXILIARY POWER (AUX)	12V@0.5A for driving a fan ; tolerance -15% ~ +10%					
	PS-ON INPUT SIGNAL	Power on: PS-ON = "Hi" or " > 2 ~ 5V" ; Power off: PS-ON = "Low" or " < 0 ~ 0.5V"					
ENVIRONMENT	POWER GOOD / POWER FAIL	500ms>PG>10ms ; The TTL signal goes high with 10ms to 500ms delay after power set up ; The TTL signal goes low at least 1ms before Vo below 90% of rated value					
	WORKING TEMP.	-30 ~ +70°C (Refer to "Derating Curve")					
	WORKING HUMIDITY	20 ~ 90% RH non-condensing					
	STORAGE TEMP., HUMIDITY	-40 ~ +85°C , 10 ~ 95% RH					
	TEMP. COEFFICIENT	±0.03%/°C (0 ~ 50°C)					
SAFETY & EMC (Note 4)	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes					
	SAFETY STANDARDS	UL60950-1, TUV EN60950-1 approved					
	WITHSTAND VOLTAGE	I/P-O/P:3KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC					
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH					
	EMC EMISSION	Compliance to EN55011 (CISPR11), EN55022 (CISPR22), Conduction Class B, Radiation Class A; EN61000-3-2,3;					
OTHERS	EMC IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8,11, EN55024, EN60601-1-2, criteria A					
	MTBF	160Khrs min. MIL-HDBK-217F (25°C)					
	DIMENSION	127*76.2*35mm (L*W*H)					
NOTE	PACKING	0.37 Kg; 36pcs/14.3Kg/1.03CUFT;					
	1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. 3. Tolerance : includes set up tolerance, line regulation and load regulation. 4. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on http://www.meanwell.com) 5. Derating may be needed under low input voltages. Please check the derating curve for more details. 6. Heat Sink HS1,HS2 can not be shorted.						

■ Mechanical Specification

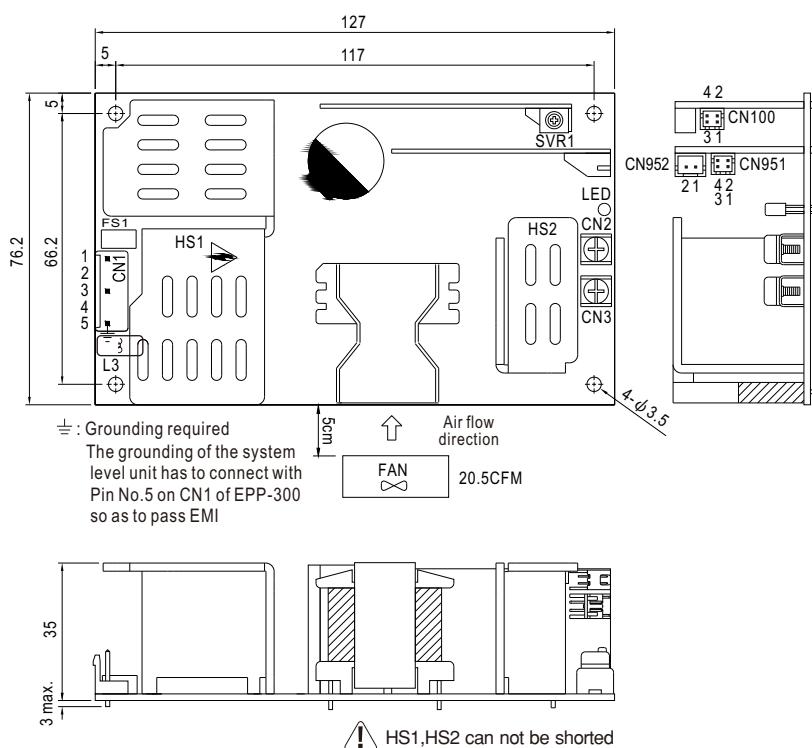
 Unit:mm
 AC Input Connector (CN1) : JST B5P-VH or equivalent

Pin No.	Assignment	Mating Housing	Terminal
1	AC/N		
2,4	No Pin		
3	AC/L	JST VHR or equivalent	JST SVH-21T-P1.1 or equivalent
5	FG \pm		

DC Output Connector (CN2,CN3)

Pin No.	Assignment	Output Terminals
CN2	-V	M4 Pan HD screw in 2 positions
CN3	+V	Torque to 8 lbs-in(90cNm)max.

Function Connector(CN100):HRS DF11-4DP-2DS or equivalent

Pin No.	Status	Mating Housing	Terminal
1	-S		
2	+S		
3	DC COM	HRS DF11-4DS or equivalent	HRS DF11-**SC or equivalent
4	PG		

Function Connector(CN951):HRS DF11-4DP-2DS or equivalent


Pin No.	Status	Mating Housing	Terminal
1	5VSB		
2,4	DC COM	HRS DF11-4DS or equivalent	HRS DF11-**SC or equivalent
3	PS-ON		

FAN Connector(CN952) : JST S2B-XH or equivalent


Pin No.	Assignment	Mating Housing	Terminal
1	DC COM	JST XHP or equivalent	JST SXH-001T-P0.6
2	+12V		

 PFC fosc : 65KHz
 PWM fosc : 70KHz

■ Block Diagram

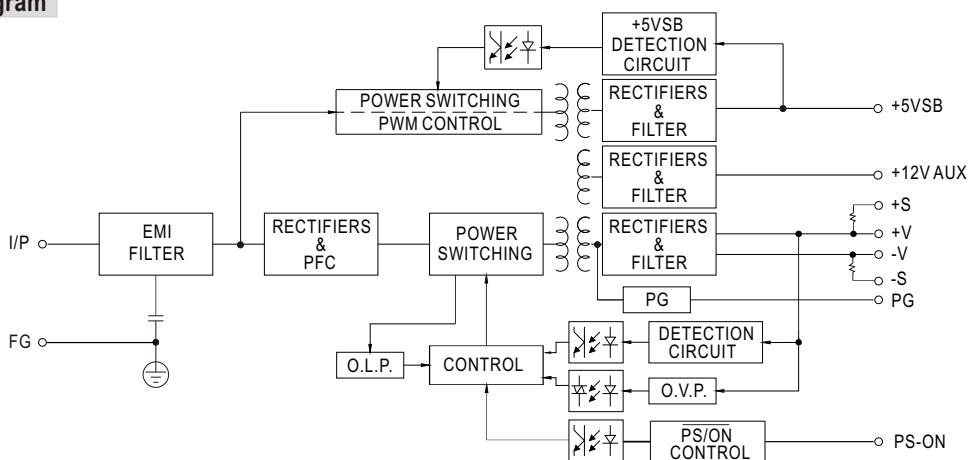

■ Derating Curve

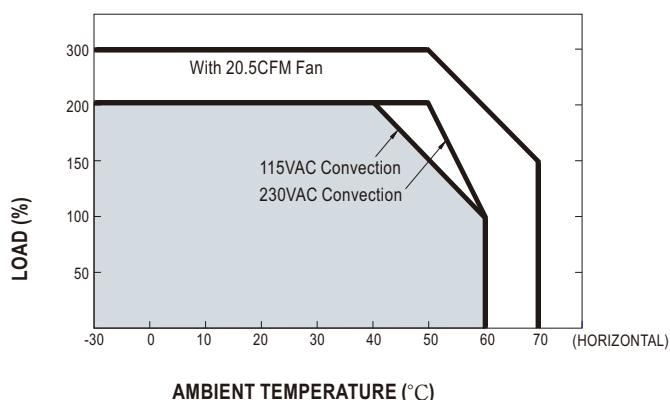

■ Output Derating VS Input Voltage

