



DDRH-30-xxP



DDRH-30-xxST



DDRH-30-xxDR



## ■ Features

- **150~1500Vdc** 10:1 ultra-wide input range
- 4KVac I/O high isolation(Reinforced isolation)
- Protections: Short circuit / Overload / Over voltage / DC input under voltage / DC input reverse Polarity
- **Fanless design**, fully encapsulated, cooling by free air convection
- Can be installed on DIN rail TS-35/7.5 or 15 (DR-Type)
- **-40~+80°C** ultra-wide operating temperature ( $> +50^\circ\text{C}$  derating)
- Operating altitude up to 5000 meters
- 3 years warranty

## ■ Applications

- Photovoltaic power generation
- Renewable Energy System
- High voltage frequency conversion
- Industrial control system
- Semiconductor fabrication equipment
- Electro-mechanical apparatus
- DC bus centralized application
- Energy storage system(ESS)
- Charging pile
- Third rail

## ■ GTIN CODE

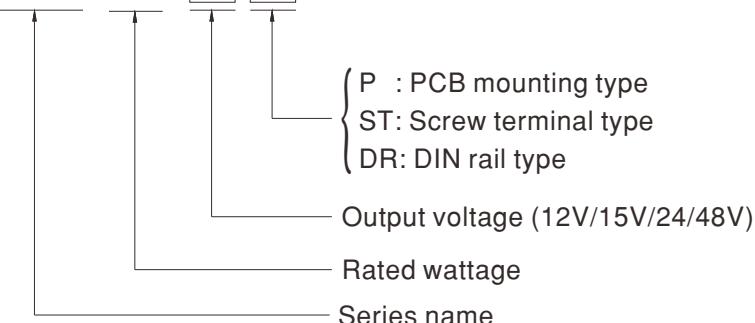
MW Search: <https://www.meanwell.com/serviceGTIN.aspx>

## ■ Description

DDRH-30 series is a 150 ~ 1500Vdc high reliable ultra-high input DC-DC converter which can supply stable working voltage for the load. Main features are as following: compact size, -40~+80°C wide range operating temperature, 4KVac high isolation voltage, operation at 5000m altitude, low ripple & noise, complete protections and so on. Furthermore, this series also has DIN Rail type, it is suitable to be mounted on TS-35/7.5 or TS-35/15 rails. DDRH-30 is designed to meet UL1741 and IEC62109-1 standard. It is suitable for industrial automation, surveillance, telecommunication and can be widely deployed in the applications of new energy generation such as solar power, and windmill power generation, for instances, photovoltaic power systems, high voltage inverting, DC bus centralized application, ESS, charging pile, railway and so forth.

## ■ Model Encoding

DDRH - 30 - 12 P





30W High Reliable 150~1500Vdc Ultra Wide Input DC-DC Converter

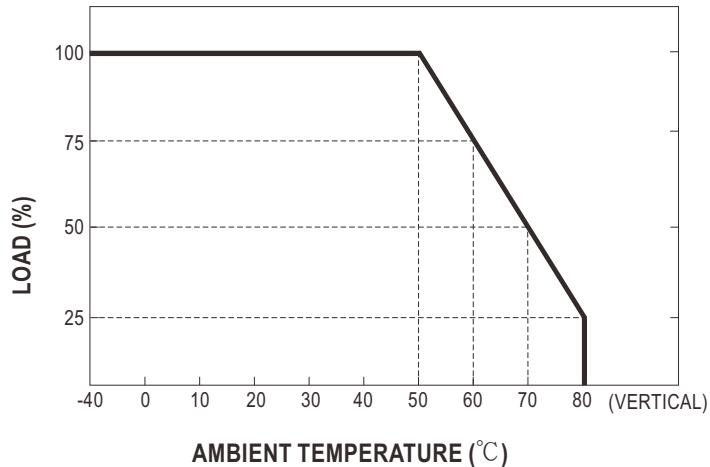
**DDRH-30 series****MODEL SELECTION TABLE**

ORDER NO.	INPUT		OUTPUT		EFFICIENCY (Typ.)	CAPACITOR LOAD (MAX.)	
	INPUT VOLTAGE (RANGE)	INPUT CURRENT		OUTPUT VOLTAGE	OUTPUT CURRENT		
		NO LOAD	FULL LOAD				
DDRH-30-12□	Nominal 800Vdc (150~1500Vdc)	0.2mA	50mA	12V	2.5A	85%	
DDRH-30-15□		0.2mA	50mA	15V	2A	88%	
DDRH-30-24□		0.2mA	50mA	24V	1.25A	91%	
DDRH-30-48□		0.2mA	50mA	48V	0.625A	91%	

□ = P, ST, DR

SPECIFICATION			
INPUT	VOLTAGE RANGE	150 ~ 1500Vdc	
	FILTER	Pi type	
	EXTERNAL INPUT FUSE	4A/1500Vdc, required (Please refer to page 6 for more details)	
	INRUSH CURRENT (Typ.)	Cold start 150A max. @ Vin=800Vdc	
OUTPUT	VOLTAGE ACCURACY	±2.0%	
	RATED POWER	30W	
	RIPPLE & NOISE Note.2	12 ~ 24Vo: 100mVp-p 48Vo: 150mVp-p	
	LINE REGULATION	±1%	
	LOAD REGULATION	±1% (10% Load to Full Load)	
	SWITCHING FREQUENCY (Typ.)	28 ~ 75.6KHz	
	HOLD UP TIME	16ms min. @Vin=800Vdc	
	SETUP TIME	2s max. @150~1500Vdc	
PROTECTION	SHORT CIRCUIT	Protection type : Hiccup mode, continuous, automatic recovery	
	OVERLOAD	110 ~ 300% rated output power	
		Protection type : Hiccup mode, recovers automatically after fault condition is removed	
	OVER VOLTAGE	Hiccup mode, recovers automatically after fault condition is removed	
	DC INPUT	REVERSE POLARITY	By internal Bridge Diode, no damage, recovers automatically after fault condition removed
		UNDER VOLTAGE	Start-up voltage 144Vdc
		LOCKOUT	Shutdown voltage 132Vdc
ENVIRONMENT	WORKING TEMP.	-40 ~ +80°C (Refer to "Derating Curve")	
	WORKING HUMIDITY	20% ~ 90% RH non-condensing	
	STORAGE TEMP., HUMIDITY	-40 ~ +85°C, 10 ~ 95% RH non-condensing	
	TEMP. COEFFICIENT	±0.02% / °C (-40°C ~ 50°C) Typ.	
	VIBRATION	Meets: MIL-STD-810F Table 514.5C-VIII, 15-2000Hz, X,Y,Z axis, 1hr (each axis), total 3hrs	
	OPERATING ALTITUDE Note.3	5000 meters	
	OVER VOLTAGE CATEGORY	II ; According to EN62109-1; altitude up to 5000 meters	
SAFETY & EMC ( Note.4)	SAFETY STANDARDS	UL1741, CSA C22.2 No.107.1-16, IEC62109-1(LVD), EAC TP TC 004 approved	
	WITHSTAND VOLTAGE	I/P-O/P:4KVac	
	ISOLATION RESISTANCE	I/P-O/P, 100M Ohms / 500VDC / 25°C / 70% RH	
	EMC EMISSION	Parameter	Standard
		Conducted	BS EN/EN55032
		Radiated	BS EN/EN55032
	EMC IMMUNITY	BS EN/EN55035	
		Parameter	Standard
		ESD	BS EN/EN61000-4-2
		Radiated Susceptibility	BS EN/EN61000-4-3
		EFT/Burst	BS EN/EN61000-4-4
		Surge	BS EN/EN61000-4-5
		Conducted	BS EN/EN61000-4-6
OTHERS	MTBF	318Khrs MIL-HDBK-217F(25°C)	
	DIMENSION (L*W*H)	P Type: 89*63.5*25mm, ST Type: 135*70*32mm, DR Type: 135*70*43.5mm	
	CASE MATERIAL	Non-conductive black plastic (UL 94V-0 rated)	
	POTTING MATERIAL	UL 94V-0	
	PIN MATERIAL	Base: copper, Plating: Matte Tin	
	PACKING	P Type : 240g ; 6pcs/Tray, 18pcs/per carton	
		ST Type : 305g ; 6pcs/Tray, 18pcs/per carton	
		DR Type : 310g ; 6pcs/Tray, 18pcs/per carton	
NOTE	1. All parameters NOT specially mentioned are measured at 800Vdc input, rated load and 25°C of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1µf & 47µf parallel capacitor. 3. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft). 4. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on <a href="http://www.meanwell.com">http://www.meanwell.com</a> ) ※ Product Liability Disclaimer : For detailed information, please refer to <a href="https://www.meanwell.com/serviceDisclaimer.aspx">https://www.meanwell.com/serviceDisclaimer.aspx</a>		

### ■ Derating Curve

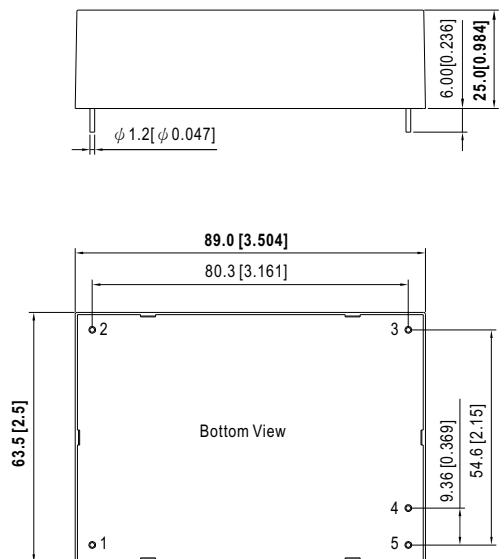


### ■ Mechanical Specification

- All dimensions in mm(inch)
- Tolerance:  $x.x \pm 0.7\text{mm}$  ( $x.x \pm 0.0275\text{"}$ )  
 $x.xx \pm 0.5\text{mm}$  ( $x.xx \pm 0.02\text{"}$ )  
 $x.xxx \pm 0.5\text{mm}$  ( $x.xxx \pm 0.02\text{"}$ )

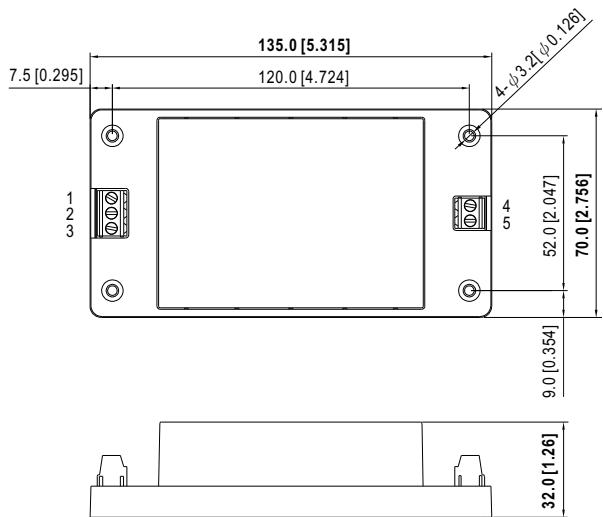
Pin size is:  $\phi 1.2 \pm 0.1\text{mm}$  ( $\phi 0.047 \pm 0.004\text{ inch}$ )

### DDRH-30-xxP (PCB Mounting Type)



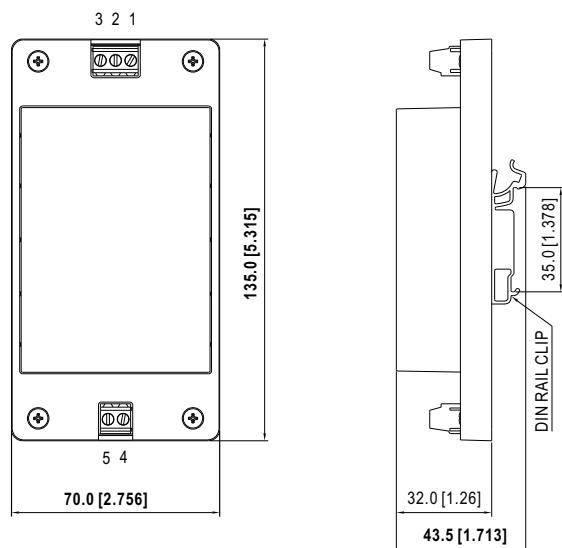
### ■ Plug Assignment

Pin-Out	
Pin No.	Output
1	-Vin
2	+Vin
3	NC
4	-Vout
5	+Vout

**DDRH-30-xxST (Screw Terminal Type)**

**Terminal Pin No. Assignment**

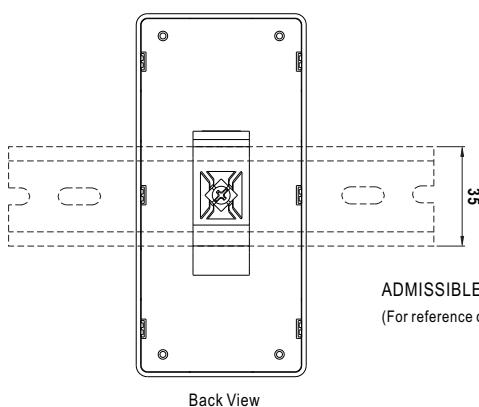
Pin-Out		
Pin No.	Output	Mating wire
1	-Vin	12~24AWG
2	NC	
3	+Vin	
4	+Vout	
5	-Vout	

Note: Recommed torque setting for terminal is 5kgf-cm(4.4 Lb-in)

**DDRH-30-xxDR (DIN Rail Type)**

**Terminal Pin No. Assignment**

Pin-Out		
Pin No.	Output	Mating wire
1	-Vin	12~24AWG
2	NC	
3	+Vin	
4	+Vout	
5	-Vout	

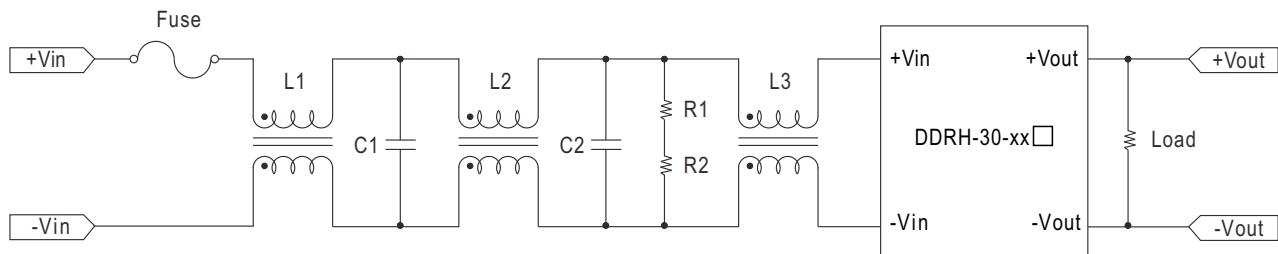
Note: Recommed torque setting for terminal is 5kgf-cm(4.4 Lb-in)

**Installation Instruction(DDRH-30-xxDR only)**


ADMISSIBLE DIN-RAIL:TS35/7.5 or TS35/15  
(For reference only. Not included with unit.)

### ■ EMC Suggestion Circuit

※EMI test standard: BS EN/EN55032 Class A conducted and radiated emission are as below:



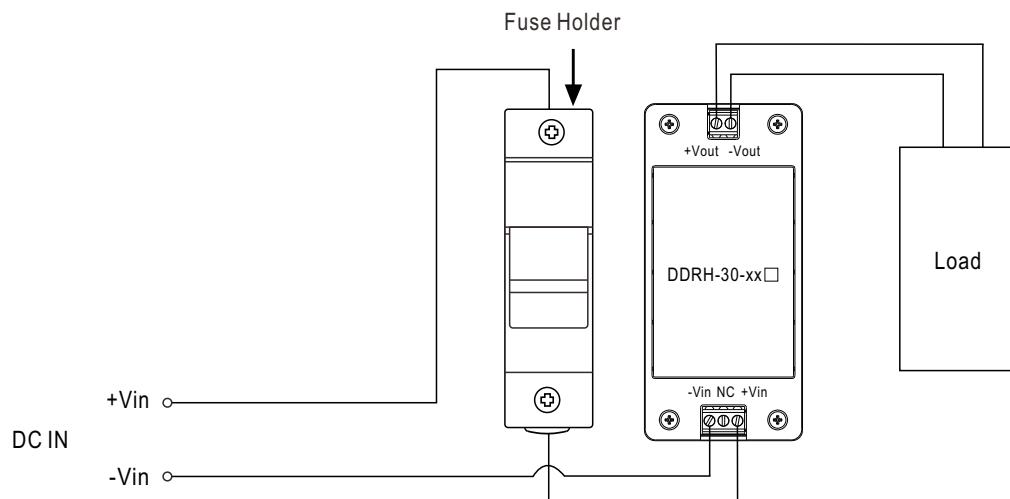
Model No.	BS EN/EN55032 Class A			
	Fuse	L1,L2,L3	C1,C2	R1,R2
DDRH-30-xxP	4A/1500Vdc	Common choke 20mH SQ1515	0.33μF/1500Vdc	1/2W 3M, $\geq 800V$
DDRH-30-xxST				
DDRH-30-xxDR				

### ■ External Fuse Wiring Instruction

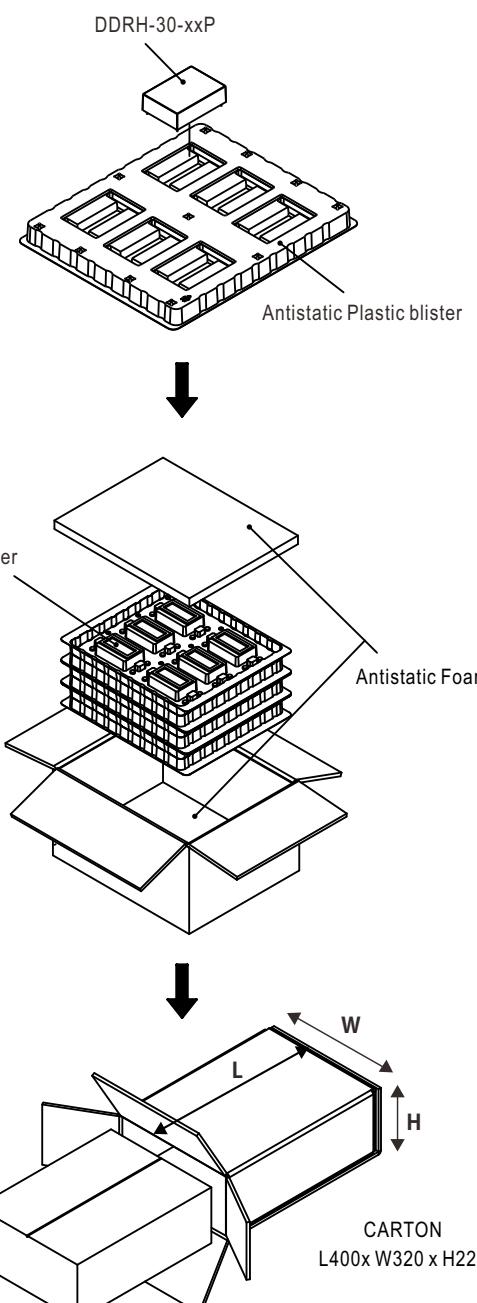
External FUSE is required. FUSE specification: 4A/1500Vdc.

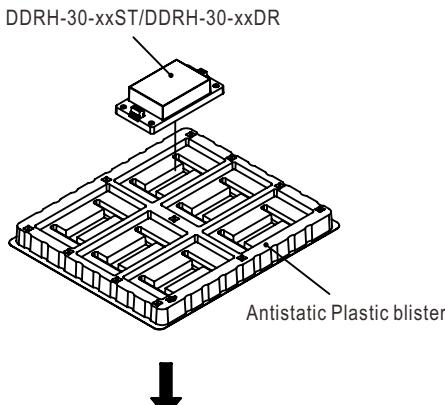
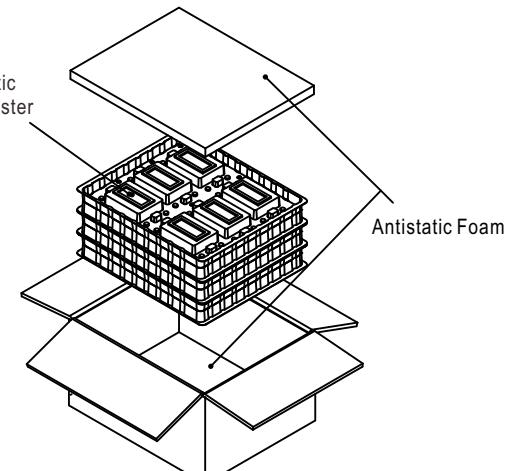
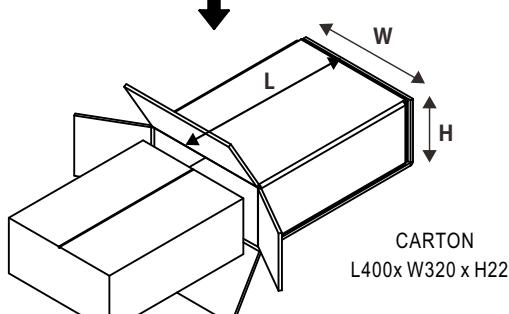
Suggested model:

Fuse Brand	Manufacturer Part NO.		MW's Order NO.
	Fuse	Fuse Holder	Fuse + Fuse Holder
WalterFuse	WJ30-4	WJ30-H	<a href="#">WJ30-4_WJ30-H</a>



## ■ Packing

Standard Packing	DDRH-30-xxP			
	MPQ Per Tray(PCS)	One Tray G.W.	Max. Q'TY/ Carton(PCS)	One Carton G.W.
Unit : mm 	6	1.66Kg	18	6Kg

Standard Packing	DDRH-30-xxST			
	MPQ Per Tray(PCS)	One Tray G.W.	Max. Q'TY/ Carton(PCS)	One Carton G.W.
Unit : mm 	6	2Kg	18	7Kg
DDRH-30-xxDR				
	MPQ Per Tray(PCS)	One Tray G.W.	Max. Q'TY/ Carton(PCS)	One Carton G.W.
	6	2.03Kg	18	7.1Kg

### ■ Installation Manual

Please refer to : <http://www.meanwell.com/manual.html>