



UL61010


BS EN/EN62368-1
BS EN/EN61558-1
BS EN/EN61010

IEC62368-1
IEC61558-1
IEC61010

AS/NES61558-1
AS/NES62368-1

IS13252
(By request)

KC62368-1
(By request)


CNS15598-1


GB4943.1
(Applying)


EAC CE UK CA



■ Features

- 85~264Vac input range
- Global certificates in multi-fields (ITE 62368-1, Industrial 61558-1/2-16,61010)
- 30mm slim width
- High efficiency up to 91% and no load power dissipation<1W
- Built-in constant current limiting circuit
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Fanless design, cooling by free air convection
- Over voltage category III (OVC III)
- -40~+70°C wide range operation temperature (>+50°C derating)
- Operating altitude up to 5000 meters
- Built-in DC OK relay contact
- Can be installed on DIN rail TS-35/7.5 or 15
- 3 years warranty

■ Description

The XDR-120E series is a 120W AC/DC economical ultra slim industrial DIN rail power. Key features of this series include a narrow 30mm casing, optimizing system installation space, and an ultra-wide input range of 85~264Vac suitable for global use. It boasts a maximum efficiency of 91% and a low standby power consumption <1W for energy savings and carbon reduction. It has built-in constant current, fanless design, a wide operating temperature range of -40 to +70°C (up to +50°C at full load); OVCIII compliance; built-in DC OK signal. With comprehensive protection functions, complete safety certifications, and a 3-years warranty, the XDR-120E series is a compact, high-performance, and highly reliable DIN rail power supply.

■ Model Encoding

XDR - 120E - 24

Output voltage(12V/24V/36V/48V)
Economical version
Output wattage
Series name

■ Applications

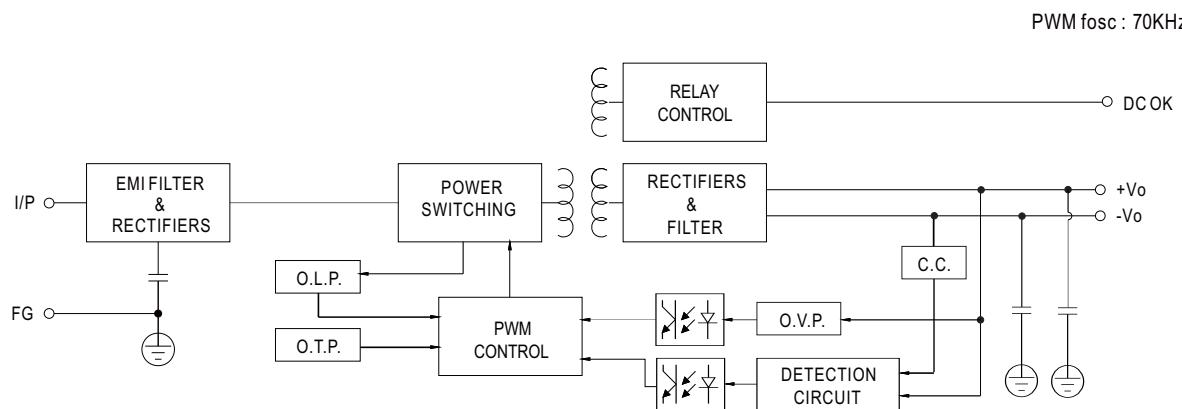
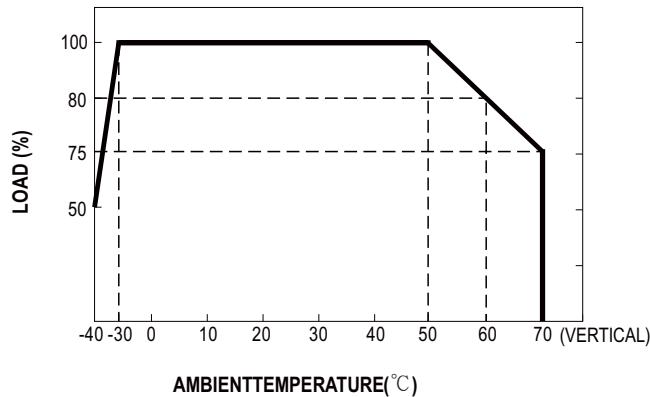
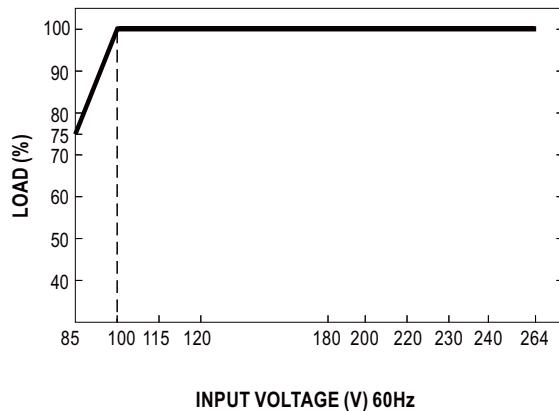
- Industrial control system
- Semiconductor fabrication equipment
- Factory automation
- Electro-mechanical apparatus
- Battery charger

■ GTIN CODE

MW Search: <https://www.meanwell.com/serviceGTIN.aspx>

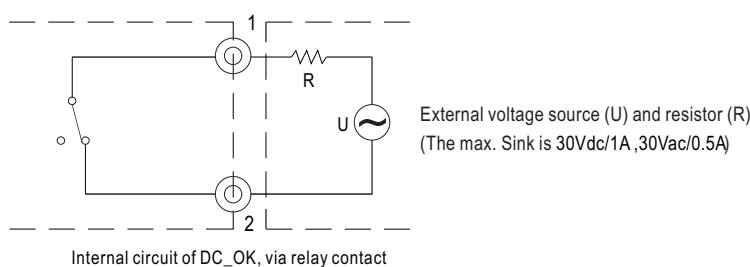
SPECIFICATION

MODEL	XDR-120E-12	XDR-120E-24	XDR-120E-36	XDR-120E-48			
OUTPUT	DC VOLTAGE	12V	24V	36V			
	RATED CURRENT	10A	5A	3.33A			
	CURRENT RANGE	0 ~ 10A	0 ~ 5A	0 ~ 3.33A			
	RATED POWER	120W	120W	119.88W			
	RIPPLE & NOISE (max.) Note.2	100mVp-p	120mVp-p	150mVp-p			
	VOLTAGE ADJ. RANGE	12 ~ 15V	24 ~ 29V	36 ~ 42V			
	VOLTAGE TOLERANCE Note.3	±2.0%	±1.0%	±1.0%			
	LINE REGULATION	±0.5%	±0.5%	±0.5%			
	LOAD REGULATION	±1.0%	±1.0%	±1.0%			
	SETUP, RISE TIME	1200ms, 60ms/230Vac	2500ms, 60ms/115Vac at full load				
INPUT	HOLD UP TIME (Typ.)	16ms/230Vac	8ms/115Vac at full load				
	AC VOLTAGE RANGE	85 ~ 264Vac					
	DC VOLTAGE RANGE	120 ~ 370Vdc					
	NO LOAD POWER CONSUMPTION (Typ.)	0.9W @115Vac & 230Vac	1W @115Vac & 230Vac				
	FREQUENCY RANGE	47 ~ 63Hz					
	EFFICIENCY (Typ.)	89%	91%	91%			
	AC CURRENT (Typ.)	2.3A/115Vac	1.3A/230Vac				
	INRUSH CURRENT (Typ.)	COLD START 20A/115Vac	40A/230Vac				
PROTECTION	LEAKAGE CURRENT	<1mA / 240Vac					
	OVERLOAD	105-130% rated output power, constant current limiting without shutdown , recovers automatically after fault condition is removed					
	OVER VOLTAGE	15 ~ 18V	30 ~ 34V	43 ~ 50V			
	OVER TEMPERATURE	Protection type : Shut down o/p voltage, re-power on to recover					
FUNCTION	DC OK RELAY CONTACT	Relay Contact Ratings (max.):30Vdc/1A, 30Vac/0.5A resistive load					
ENVIRONMENT	WORKING TEMP. Note.4	-40 ~ +70°C (Refer to "Derating Curve")					
	WORKING HUMIDITY	20 ~ 95% RH non-condensing					
	STORAGE TEMP., HUMIDITY	-40 ~ +85°C, 10 ~ 95% RH non-condensing					
	TEMP. COEFFICIENT	±0.03% /°C (0 ~ 50°C)					
	VIBRATION	Component:10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes; Mounting: Compliance to IEC60068-2-6					
SAFETY & EMC (Note 7)	SAFETY STANDARDS	UL61010; TUV BS EN/EN62368-1, BS EN/EN61558-1/-2-16, BS EN/EN61010; CB IEC62368-1, IEC61558-1, IEC61010; RCM AS/NZS 62368-1, AS/NZS 61558-1/-2-16; BSMI CNS15598-1; CCC GB4943.1; EAC TPTC004 approved; KC KC62368-1 and BIS IS13252 (Part 1):2010 certified, no stock, contact sale for inquires					
	OVER VOLTAGE CATEGORY Note.5	IEC/EN 61558-1/-2-16 (OVC III , altitude up to 2000m) IEC/EN/UL 61010 (OVC II , altitude up to 5000m) IEC/EN 62368-1 (OVC II , altitude up to 5000m)					
	SAFETY EXTRA-LOW VOLTAGE(SELV)	IEC/EN 61558-2-16 (SELV) IEC/EN/UL 61010-2-201 (SELV) IEC/EN 62368-1 (SELV / ES1)					
	WITHSTAND VOLTAGE	I/P-O/P: 4KVac I/P-FG: 2KVac O/P-FG: 1.5KVac O/P-DC OK: 0.5KVac					
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG: 100M Ohms/500VDC/25°C / 70%RH					
	EMC EMISSION	Parameter	Standard	Test Level / Note			
		Conducted	BS EN/EN55032 (CISPR32) / BS EN/EN61204-3 / CNS15936	Class B			
		Radiated	BS EN/EN55032 (CISPR32) / BS EN/EN61204-3 / CNS15936	Class B			
		Harmonic Current	BS EN/EN61000-3-2	Class A			
	EMC IMMUNITY	Voltage Flicker	BS EN/EN61000-3-2	-----			
		BS EN/EN55035 , BS EN/EN61204-3, BS EN/EN61000-6-2(BS EN/EN50082-2)					
		Parameter	Standard	Test Level / Note			
		ESD	BS EN/EN61000-4-2	Level 3, 8KV air ; Level 3, 4KV contact; criteria A			
		Radiated	BS EN/EN61000-4-3	Level 3, 10V/m ; criteria A			
		EFT / Burst	BS EN/EN61000-4-4	Level 2, 2KV ; criteria A			
		Surge	BS EN/EN61000-4-5	Level 4, 2KV/Line-Line ;Level 4, 4KV/Line-Line-Chassis ;criteria A			
OTHERS	Conducted	BS EN/EN61000-4-6	Level 3, 10V ; criteria A				
	Magnetic Field	BS EN/EN61000-4-8	Level 4, 30A/m ; criteria A				
	MTBF	2223.1K hrs min. Telcordia SR-332 (Bellcore) ; 440.4K hrs min. MIL-HDBK-217F (25°C)					
DIMENSION	30*125.2*116mm (W*H*D)						
	PACKING	420g; 24pcs/11.1Kg/1.27CUFT					
NOTE	1. All parameters NOT specially mentioned are measured at 230Vac input, rated load and 25°C of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1 μF & 47 μF parallel capacitor. 3. Tolerance : includes set up tolerance, line regulation and load regulation. 4. When the temperature is between -40 °C and -20 °C and the input voltage is between 85V and 90V, the temperature derating curve drops to 40% . 5. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft). 6. Installation clearances : 40mm on top, 20mm on the bottom, 5mm on the left and right side are recommended when loaded permanently with full power. In case the adjacent device is a heat source, 15mm clearance is recommended. 7. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives. (as available on https://www.meanwell.com/Upload/PDF/EMI_statement_en.pdf)						
	※ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx						

Block Diagram

Derating Curve

Static Characteristics


■ Function Manual**1.DC OK Relay Contact**

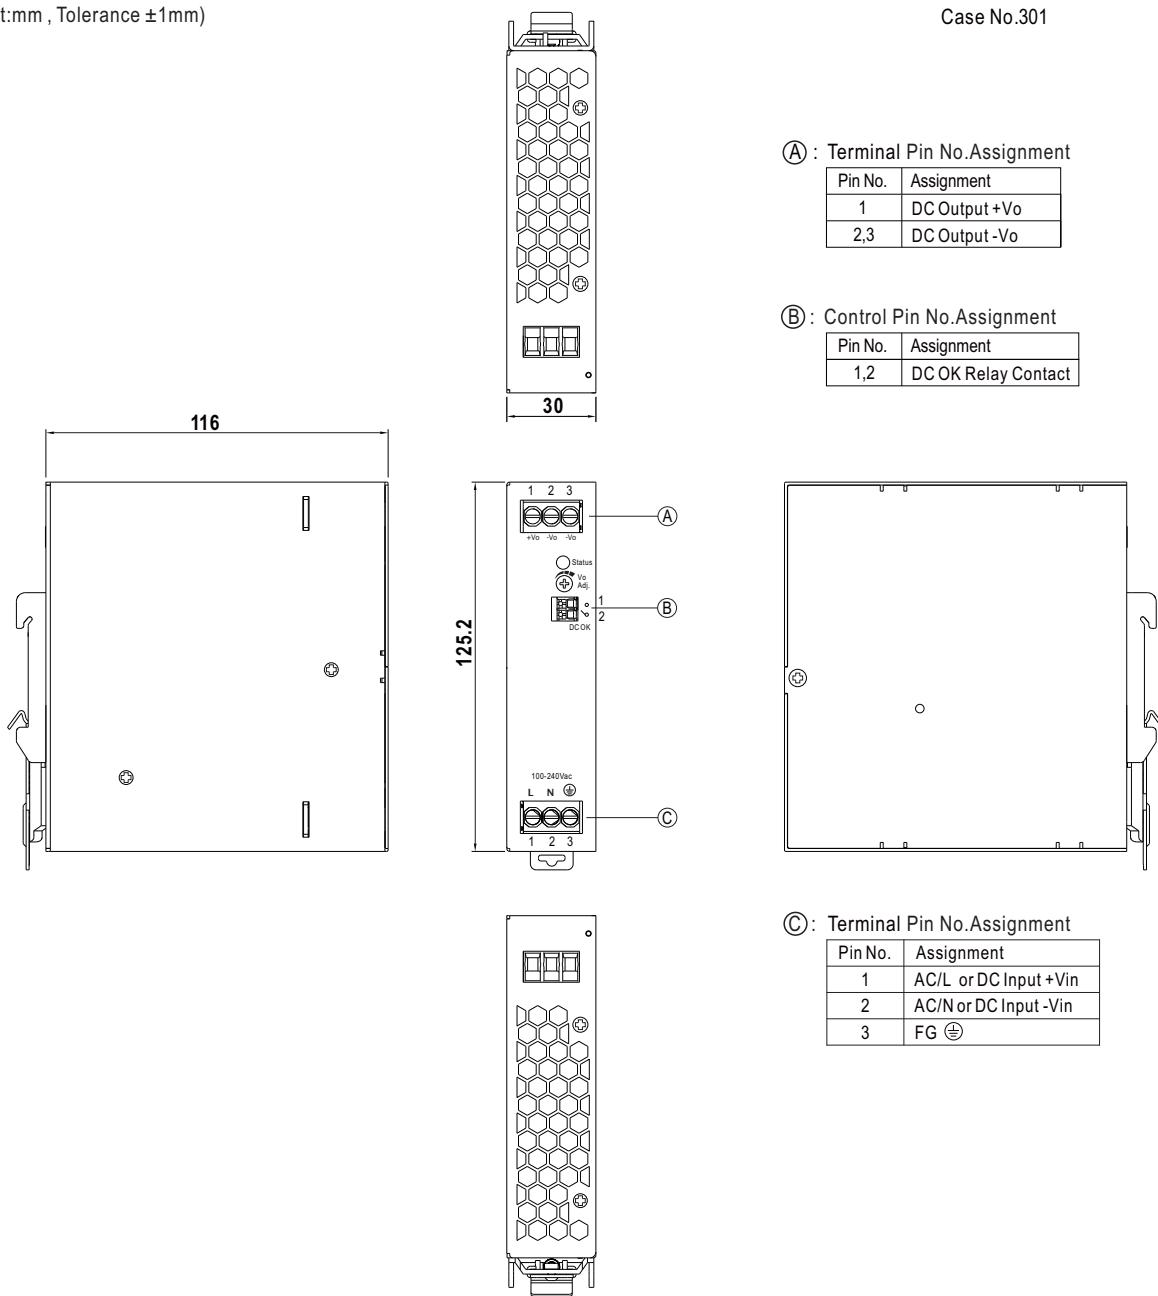
Contact Close	PSU turns ON/DC OK.
Contact Open	PSU turns OFF/DC Fail.
Contact Ratings (max.)	30Vdc/1A, 30Vac/0.5A resistive load.



■ Mechanical Specification

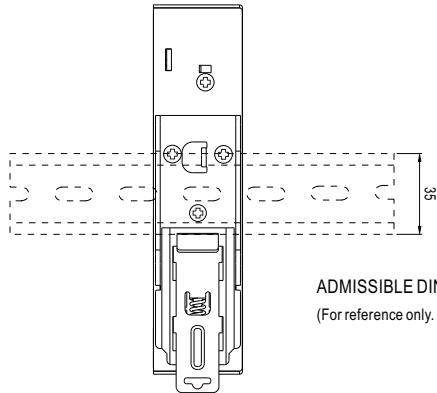
(Unit:mm , Tolerance ± 1 mm)

Case No.301



■ Recommend Wiring

	AC Input T.B	DC Output T.B	Signal connector
Solid Wire	6mm ² max.	6mm ² max.	1.5mm ² max.
A.W.G	22~10 AWG	22~10 AWG	24~16 AWG
Screw Terminal Torque	9 Lb-In	9 Lb-In	/

■ Installation Instruction

This series fits DIN rail TS35/7.5 or TS35/15.
For installation details, please refer to the Instruction manual.

ADMISSIBLE DIN-RAIL:TS35/7.5 OR TS35/15
(For reference only. Not included with unit.)

■ Installation Manual

Please refer to : <http://www.meanwell.com/manual.html>