



AC Input: 200-240Vac



IS 15885(Part 2/Sec 13) 8
www.bis.gov.in



■ Features

- Constant Current mode output with multiple levels selectable by dip switch
- KNX/EIB protocol
- Flicker free design
- Support emergency lighting(EL)
- Integrated constant light output
- Integrated KNX push button interface
- Synchronization up to 10units
- Functions: Manual dim, operation hours, power consumption feedback, log/linear curve selection...etc
- 3 years warranty

■ Applications

- LED indoor lighting
- LED office lighting
- LED architectural lighting
- LED panel lighting


■ GTIN CODE

MW Search: <https://www.meanwell.com/serviceGTIN.aspx>

■ Description

LCM-40KN series is a 40W AC/DC constant current mode output LED driver featuring the multiple levels selectable by dip switch and the KNX interface to avoid using the complicated KNX-DALI gateway. LCM-40KN operates from 180~ 295VAC and offers different current levels ranging between 350mA and 1050mA. Thanks to the high efficiency up to 90%, with the fanless design, the entire series is able to operate for -30°C ~+90°C case temperature under free air convection. In addition, LCM-40KN is equipped with push dimming and synchronization so as to provide the optimal design flexibility for LED lighting system.

■ Model Encoding

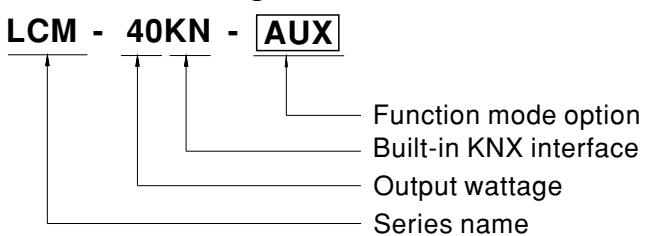


| Type | Function | Note |
|-------|--|------------|
| Blank | KNX and push dimming, with standby power consumption <0.5W | In Stock |
| AUX | KNX and push dimming, with standby power consumption <1.2W and Auxiliary DC output | By request |

SPECIFICATION

| MODEL | | LCM-40KN-□ | | | | | | | | | |
|--------------|--|---|---------|---------|----------------|---------|---------|--|--|--|--|
| OUTPUT | CURRENT LEVEL | Current level selectable via DIP switch, please refer to "DIP SWITCH TABLE" section | | | | | | | | | |
| | | 350mA | 500mA | 600mA | 700mA(default) | 900mA | 1050mA | | | | |
| | RATED POWER | 42W | | | | | | | | | |
| | DC VOLTAGE RANGE | 2 ~ 100V | 2 ~ 80V | 2 ~ 67V | 2 ~ 57V | 2 ~ 45V | 2 ~ 40V | | | | |
| | OPEN CIRCUIT VOLTAGE (max.) | 110V | | 65V | | | | | | | |
| | CURRENT RIPPLE Note.5 | 5.0% max. @rated current | | | | | | | | | |
| | CURRENT TOLERANCE | ±5% | | | | | | | | | |
| | AUXILIARY DC OUTPUT | Nominal 12V(deviation 11.4~12.6V)@50mA for AUX-Type only | | | | | | | | | |
| INPUT | SETUP TIME Note.3 | 500ms / 230VAC | | | | | | | | | |
| | VOLTAGE RANGE Note.2 | 180 ~ 295VAC 220 ~ 392VDC (Please refer to "STATIC CHARACTERISTIC" section) | | | | | | | | | |
| | FREQUENCY RANGE | 47 ~ 63Hz | | | | | | | | | |
| | POWER FACTOR (Typ.) | PF ≥ 0.975/230VAC, PF ≥ 0.95/277VAC@full load (Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section) | | | | | | | | | |
| | TOTAL HARMONIC DISTORTION | THD < 20%(@load ≥ 75%) (Please refer to "TOTAL HARMONIC DISTORTION(THD)" section) | | | | | | | | | |
| | EFFICIENCY (Typ.) Note.4 | 90% | | | | | | | | | |
| | AC CURRENT (Typ.) | 0.23A/230VAC | | | | | | | | | |
| | INRUSH CURRENT (Typ.) | COLD START 20A(twidth=310μs measured at 50% I _{peak}) at 230VAC; Per NEMA 410 | | | | | | | | | |
| | MAX. No. of PSUs on 16A CIRCUIT BREAKER | 21 units (circuit breaker of type B) / 35 units (circuit breaker of type C) at 230VAC | | | | | | | | | |
| | LEAKAGE CURRENT | <0.5mA / 240VAC | | | | | | | | | |
| PROTECTION | STANDBY POWER CONSUMPTION Note.6 | <0.5W for Blank-Type, <1.2W for AUX-Type | | | | | | | | | |
| | SHORT CIRCUIT | Constant current limiting, recovers automatically after fault condition is removed | | | | | | | | | |
| | OVER VOLTAGE | 110 ~ 130V Shutdown o/p voltage, re-power on to recover | | | | | | | | | |
| FUNCTION | OVER TEMPERATURE | Shutdown o/p voltage, re-power on to recover | | | | | | | | | |
| | DIMMING | Please refer to "DIMMING OPERATION" section | | | | | | | | | |
| | SYNCHRONIZATION | Please refer to "SYNCHRONIZATION OPERATION" section | | | | | | | | | |
| ENVIRONMENT | TEMP. COMPENSATION | By external NTC, please refer to "TEMPERATURE COMPENSATION OPERATION" section | | | | | | | | | |
| | WORKING TEMP. | T _{case} =-30 ~ +90°C (Please refer to "OUTPUT LOAD vs TEMPERATURE" section) | | | | | | | | | |
| | MAX. CASE TEMP. | T _{case} =+90°C | | | | | | | | | |
| | WORKING HUMIDITY | 20 ~ 90% RH non-condensing | | | | | | | | | |
| | STORAGE TEMP., HUMIDITY | -40 ~ +80°C, 10 ~ 95% RH | | | | | | | | | |
| | TEMP. COEFFICIENT | ±0.03%/°C (0 ~ 50°C) | | | | | | | | | |
| SAFETY & EMC | VIBRATION | 10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes | | | | | | | | | |
| | SAFETY STANDARDS | ENEC BS EN/EN61347-1, BS EN/EN61347-2-13, BS EN/EN62384 independent, BIS IS15885(Part2/Sec13), EAC TP TC 004 approved, GB19510.14 and GB19510.1(by request) ; According to BS EN/EN50172, BS EN/EN 60598-2-22, BS EN/EN61347-2-13 appendix J suitable for emergency installations(EL)(AC Input: 200-240Vac) | | | | | | | | | |
| | KNX STANDARDS | Certified protocol | | | | | | | | | |
| | WITHSTAND VOLTAGE | I/P-O/P:3.75KVAC | | | | | | | | | |
| | ISOLATION RESISTANCE | I/P-O/P:>100M Ohms / 500VDC / 25°C / 70% RH | | | | | | | | | |
| | EMC EMISSION Note.7 | Compliance to BS EN/EN55015, BS EN/EN61000-3-2 Class C(@load ≥ 40%) ; BS EN/EN61000-3-3; GB17625.1,GB17743, EAC TP TC 020 | | | | | | | | | |
| OTHERS | EMC IMMUNITY | Compliance to BS EN/EN61000-4-2,3,4,5,6,8,11, BS EN/EN61547, light industry level(surge immunity Line-Line 2KV), EAC TP TC 020 | | | | | | | | | |
| | MTBF | 1764.6K hrs min. Telcordia SR-332 (Bellcore) ; 190.4K hrs min. MIL-HDBK-217F (25°C) | | | | | | | | | |
| | DIMENSION | 123.5*81.5*23mm (L*W*H) | | | | | | | | | |
| NOTE | PACKING | 0.24Kg ; 54pcs/15Kg/1.12CUFT | | | | | | | | | |
| | 1. All parameters NOT specially mentioned are measured at 230VAC input, rated current and 25°C of ambient temperature. 2. De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details. 3. Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time. 4. Efficiency is measured at 500mA/80V output set by DIP switch. 5. Current ripple is measured 50%~100% of maximum voltage under rated power delivery. 6. Standby power consumption is measured at 180~230VAC. 7. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again. 8. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft). 9. To fulfill requirements of the latest ErP regulation for lighting fixtures, this LED power supply can only be used behind a switch without permanently connected to the mains. ※ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx | | | | | | | | | | |

■ BLOCK DIAGRAM

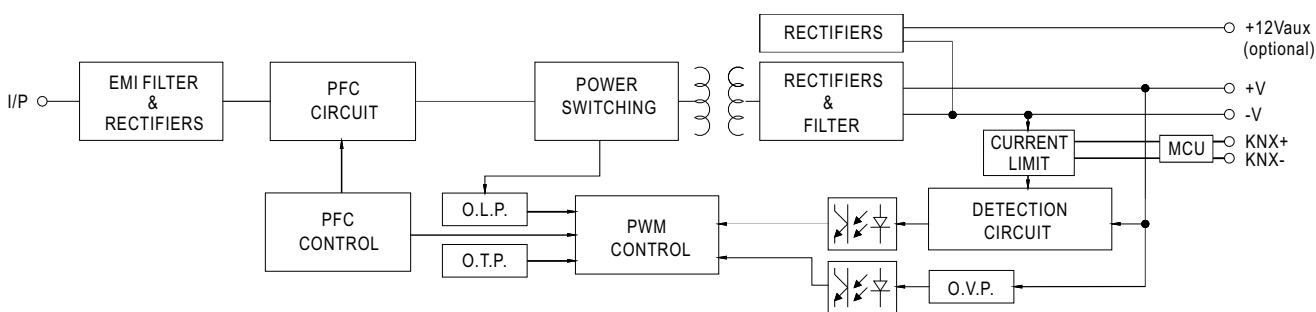 PFC fosc : 60KHz
 PWM fosc : 80KHz


■ DIP SWITCH TABLE

LCM-40KN is a multiple-stage constant current driver, selection of output current through DIP switch is exhibited below.

| Io | DIP S.W. | 1 | 2 | 3 | 4 | 5 | 6 | Max. LED voltage |
|------------------------|----------|------|------|------|------|------|------|------------------|
| 350mA | | ---- | ---- | ---- | ---- | ---- | ---- | 100V |
| 500mA | ON | ---- | ---- | ---- | ---- | ---- | ---- | 80V |
| 600mA | ON | ON | ---- | ---- | ---- | ---- | ---- | 67V |
| 700mA(factory default) | ON | ON | ON | ---- | ---- | ON | ---- | 57V |
| 900mA | ON | ON | ON | ON | ---- | ON | ---- | 45V |
| 1050mA | ON | ON | ON | ON | ON | ON | ON | 40V |

More current options through DIP switch are exhibited below.

| Io | DIP S.W. | 1 | 2 | 3 | 4 | 5 | 6 | Max. LED voltage |
|-------|----------|------|------|------|------|------|------|------------------|
| 450mA | | ---- | ON | ---- | ---- | ---- | ---- | 78V |
| 550mA | | ---- | ---- | ---- | ON | ---- | ---- | 73V |
| 650mA | ON | ---- | ---- | ---- | ON | ---- | ---- | 62V |
| 750mA | ON | ON | ---- | ---- | ON | ON | ---- | 53V |
| 800mA | ON | ON | ---- | ON | ---- | ON | ---- | 50V |
| 850mA | ON | ON | ON | ---- | ON | ON | ON | 47V |
| 950mA | ON | ON | ---- | ON | ON | ON | ON | 42V |

Note: The max. LED voltage connected at the output should be always less than the table above.


■ DIMMING OPERATION

※ KNX interface

- Apply KNX Bus cable between KNX+ and KNX-
- The application program(database) can be downloaded via Online Catalogs from ETS or via <http://www.meanwell.com/productCatalog.aspx>


| Parametrization options | Description |
|----------------------------|--|
| Switch functions | <ul style="list-style-type: none"> • Turn on brightness • Dimming speed for turn on/off • Switch telegram and status • Switch on/off delay |
| Dimming | <ul style="list-style-type: none"> • Dimming speed for 0~100% • Allow switch on via relative dimming • Push dimming with AC inut port • Block object for push dimming |
| Brightness value | <ul style="list-style-type: none"> • Dimming speed for transition brightness values • Permit set switch on and off brightness via value • Brightness value and status |
| Fault message | <ul style="list-style-type: none"> • Lamp fault • AC/DC input monitor fault messages |
| Other functions | <ul style="list-style-type: none"> • Reaction on KNX voltage failure/recovery • Power-On level • Dimming curve select(linear/log) • Synchronous dimming output • Block function(Block1&Block2) • Staircase lighting function(multi-stage switch-off) |
| General function | <ul style="list-style-type: none"> • Cyclic monitoring telegram(In operation) |
| 8 Scenes | <ul style="list-style-type: none"> • Recall and save via KNX with 8-bit telegram |
| Operating hours & CLO | <ul style="list-style-type: none"> • Operating hours counter • Constant light out(5 scheduled divisions) |
| Power consumption feedback | <ul style="list-style-type: none"> • Power consumption report |

※ CONSTANT LIGHT OUTPUT

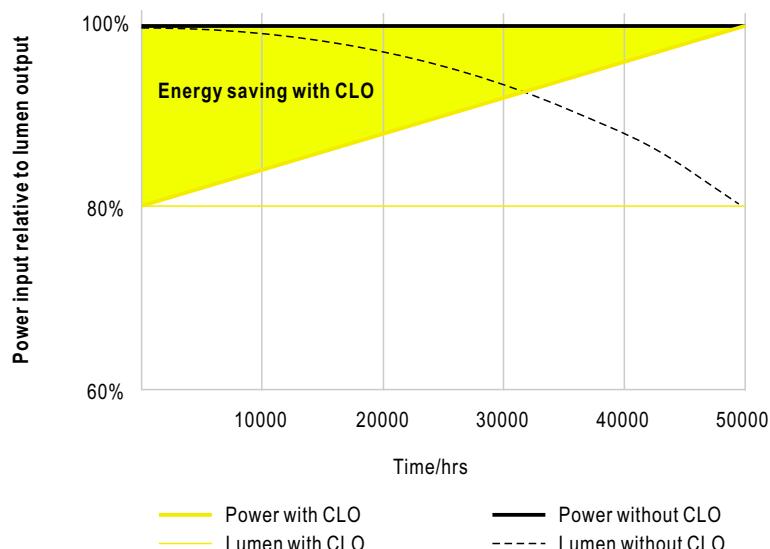


※PUSH dimming or AC/DC input monitor(Primary side)

◎ PUSH dimming

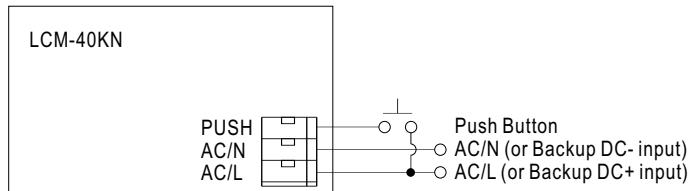

- KNX bus need to be connected when using PUSH Dimming
- The detailed function of PUSH dimming, please refer to the database.
- The maximum length of the cable between the push button and driver is 20 meters.
- The mechanical push button can be connected only between the PUSH terminal, as displayed in the diagram, and AC/L (in brown or black); it will lead to short circuit if it is connected to AC/N.
- In case the PUSH dimming is set locally, up to 10 drivers can perform the PUSH dimming at the same time when utilizing one common push button.
- In case the PUSH dimming is set independently via ETS, the number of drivers is done through group address and determined by the ETS project designer.


◎ AC/DC input monitor

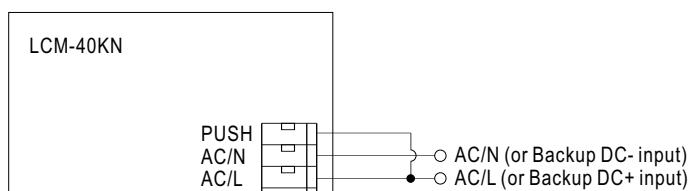

- KNX bus need to be connected when using AC/DC input monitor
- The detailed function of AC/DC input monitor(emergency lighting), please refer to the database and instruction manual.

■ SYNCHRONIZATION OPERATION

- Synchronization up to 10 drivers (1 master + 9 slaves)
- Dimming operating range : 6%~100%
- Sync cable length : < 5m
- Sync cable type : Flat cable
- Sync cable cross section area : 22 – 24 AWG (0.2~0.3mm²)

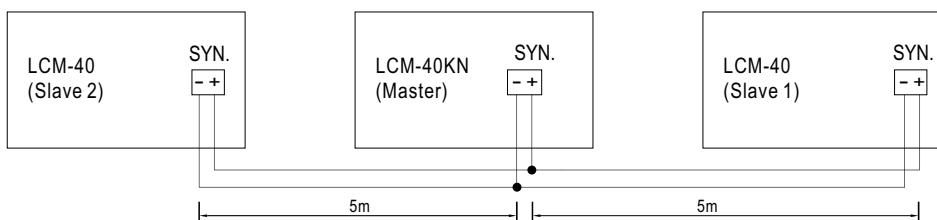


NOTE: Min. Dimming operating range depends on database setting.

■ TEMPERATURE COMPENSATION OPERATION

LCM-40KN have the built-in temperature compensation function ; by connecting a temperature sensor (NTC resistor) between the +NTC / -NTC terminal of LCM-40KN and the detecting point on the lighting system or the surrounding environment, output current of LCM-40KN could be correspondingly changed, based on the sensed temperature, to ensure the long life of LED.

NTC derating curve

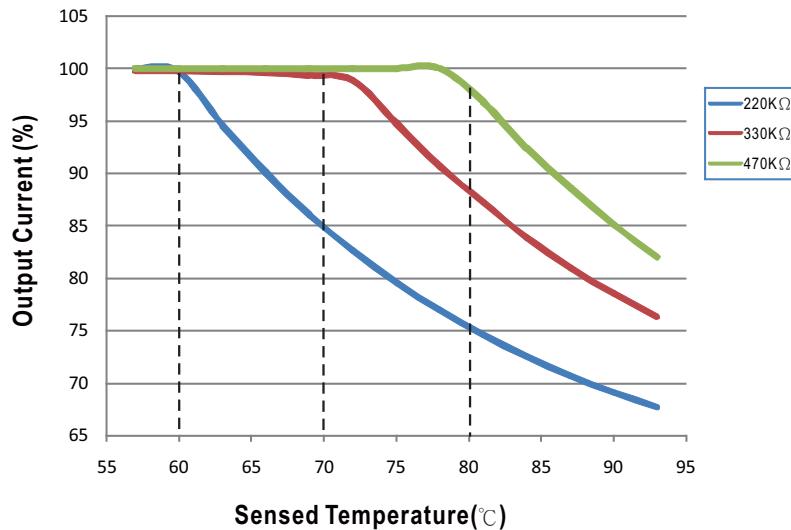

◎ LCM-40KN can still be operated normally when the NTC resistor is not connected and the value of output current will be the current level selected through the DIP switch.




◎ NTC reference:

| NTC resistance | Output Current |
|----------------|---|
| 220K | < 60°C, 100% of the rated current (corresponds to the setting current level) > 60°C, output current begins to reduce, please refer to the curve for details. |
| 330K | < 70°C, 100% of the rated current (corresponds to the setting current level) > 70°C, output current begins to reduce, please refer to the curve for details. |
| 470K | < 80°C, 100% of the rated current (corresponds to the setting current level) > 80°C, output current begins to reduce, please refer to the curve for details. |

Notes: 1. MEAN WELL does not offer the NTC resistor and all the data above are measured by using THINKING TTC03 series.

2. If other brands of NTC resistor is applied,please check the temperature curve first.



◎ KNX control, dimming and synchronization function of the driver will be invalid when the "temperature compensation" function is in use.

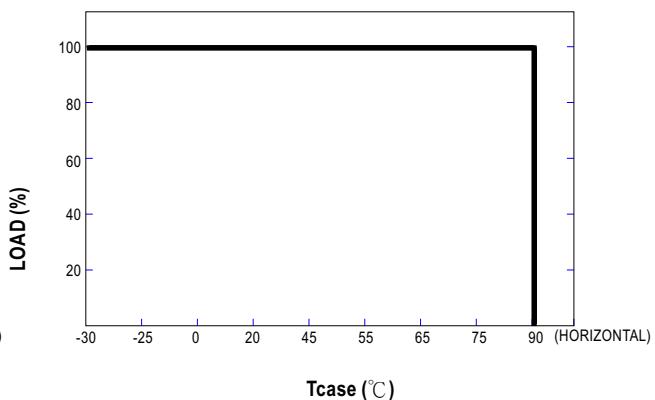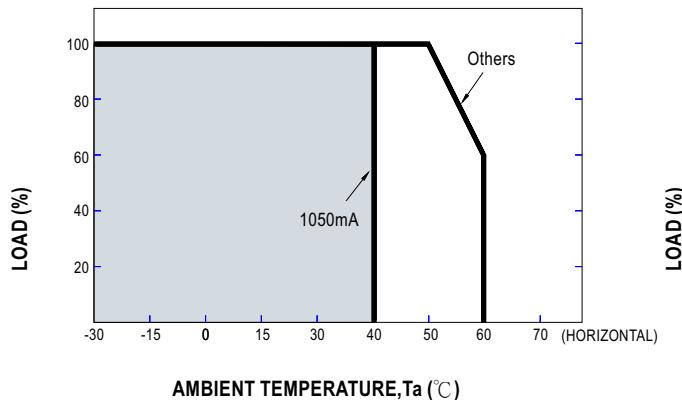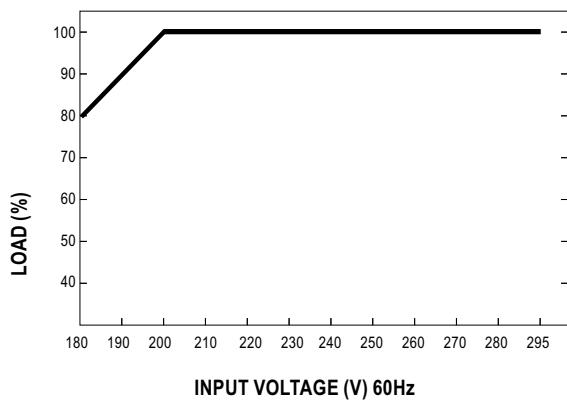■ OUTPUT LOAD vs TEMPERATURE**■ STATIC CHARACTERISTIC**

※ De-rating is needed under low input voltage.



■ TOTAL HARMONIC DISTORTION (THD)

※ Tcase at 80°C

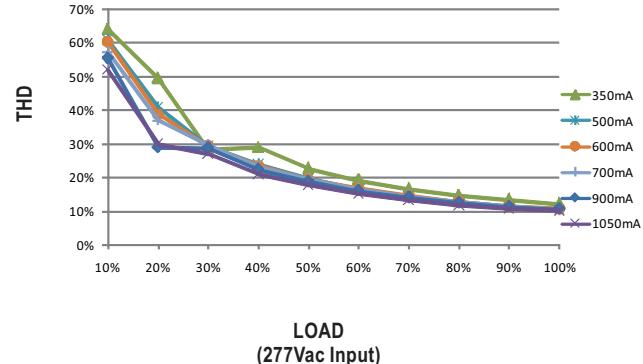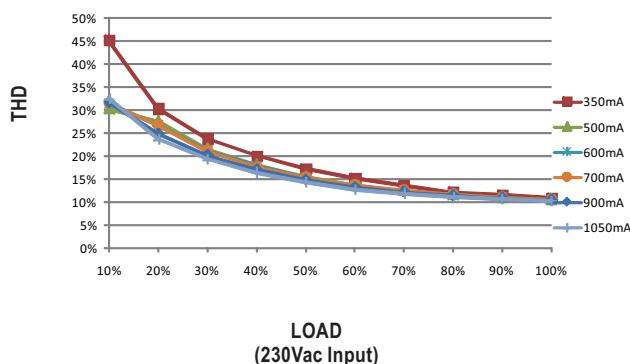

■ POWER FACTOR (PF) CHARACTERISTIC



※ Tcase at 80°C

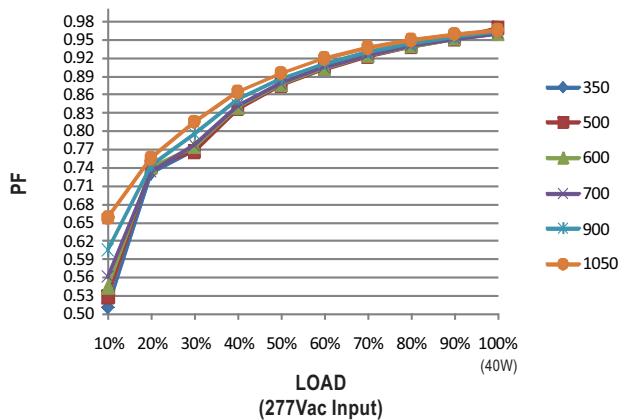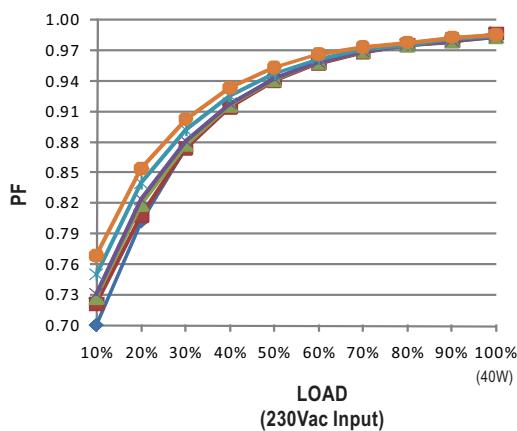

■ EFFICIENCY vs LOAD


LCM-40KN series possess superior working efficiency that up to 90% can be reached in field applications.

※ Tcase at 80°C

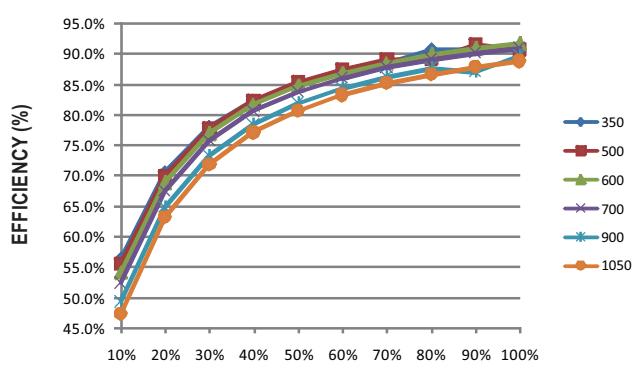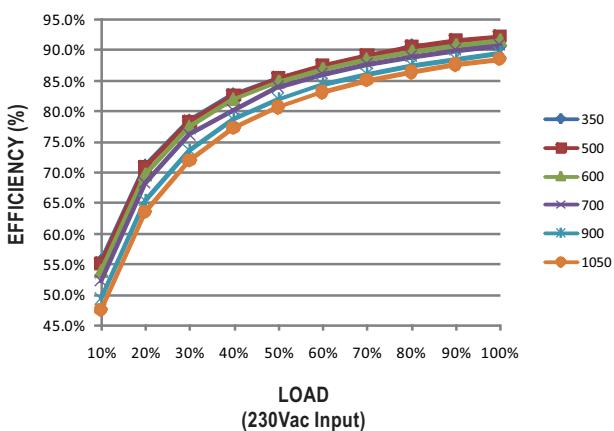

■ MECHANICAL SPECIFICATION

Case No.LCM-60B Unit:mm

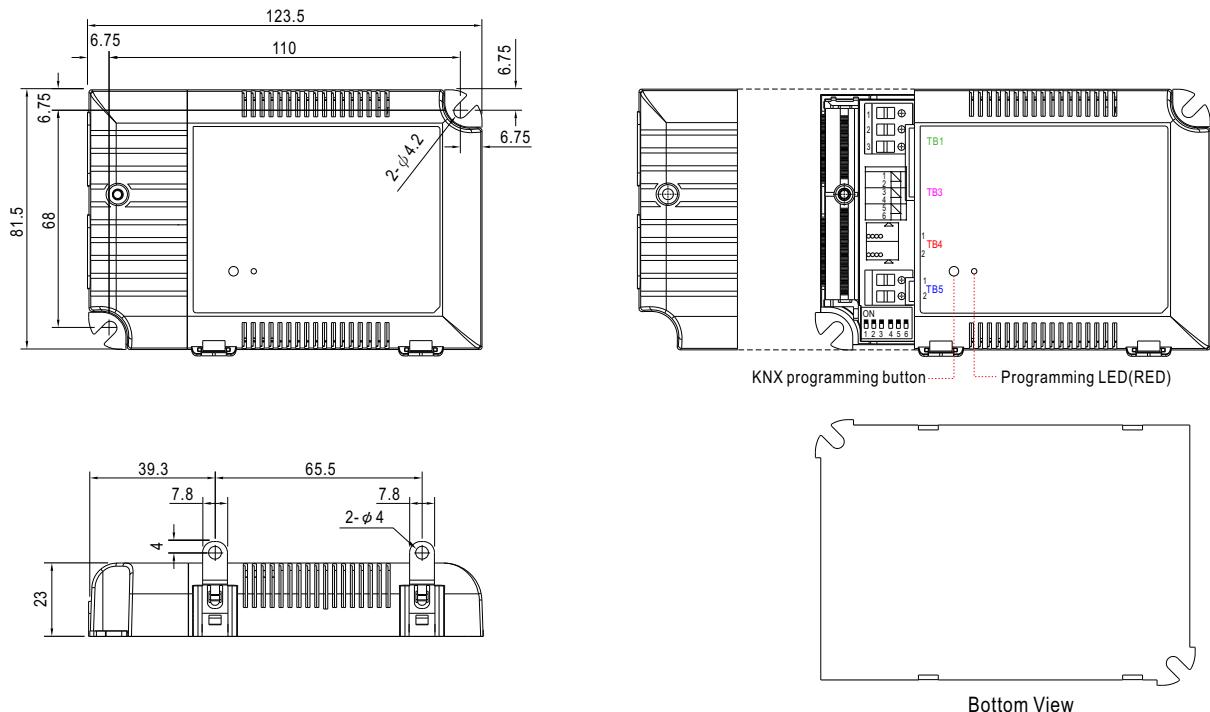

※ Terminal Pin No. Assignment(TB1)

| Pin No. | Assignment |
|---------|------------|
| 1 | AC/L |
| 2 | AC/N |
| 3 | PUSH |

※ Terminal Pin No. Assignment(TB3)

| Pin No. | Assignment | Pin No. | Assignment | Pin No. | Assignment |
|---------|----------------|---------|------------|---------|------------|
| 1 | +FAN(optional) | 3 | +NTC | 5 | +SYN |
| 2 | -FAN(optional) | 4 | -NTC | 6 | -SYN |

◎ Pin1(+FAN) / Pin2(-FAN) is the Auxiliary DC output for the optional model LCM-40KN-AUX; it can be used to drive fan.

※ Terminal Pin No. Assignment(TB4)

| Pin No. | Assignment |
|---------|------------|
| 1 | KNX- |
| 2 | KNX+ |

※ Terminal Pin No. Assignment(TB5)

| Pin No. | Assignment |
|---------|------------|
| 1 | +V |
| 2 | -V |

■ Installation Manual

Please refer to : <http://www.meanwell.com/manual.html>