



## ■ Features :

- Universal AC input / Full range (up to 295VAC)
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Output voltage and constant current level adjustable
- Built-in active PFC function
- IP66 design for indoor or outdoor installations
- Cooling by free air convection
- 100% full load burn-in test
- High reliability
- Suitable for LED lighting and moving sign applications
- Compliance to worldwide safety regulations for lighting
- Suitable for dry / damp / wet locations
- 3 years warranty




## SPECIFICATION

MODEL	CEN-60-12	CEN-60-15	CEN-60-20	CEN-60-24	CEN-60-30	CEN-60-36	CEN-60-42	CEN-60-48	CEN-60-54									
OUTPUT	DC VOLTAGE	12V	15V	20V	24V	30V	36V	42V	48V	54V								
	CONSTANT CURRENT OPERATION VOLTAGE Note.5	9 ~ 12V	11.25 ~ 15V	15 ~ 20V	18 ~ 24V	22.5 ~ 30V	27 ~ 36V	31.5 ~ 42V	36 ~ 48V	40.5 ~ 54V								
	RATED CURRENT	5A	4A	3A	2.5A	2A	1.7A	1.45A	1.3A	1.15A								
	CURRENT RANGE	0 ~ 5A	0 ~ 4A	0 ~ 3A	0 ~ 2.5A	0 ~ 2A	0 ~ 1.7A	0 ~ 1.45A	0 ~ 1.3A	0 ~ 1.15A								
	RATED POWER	60W	60W	60W	60W	60W	61.2W	60.9W	62.4W	62.1W								
	RIPPLE & NOISE (max.) Note.2	2Vp-p	2.4Vp-p	1.8Vp-p	2.4Vp-p	3Vp-p	3.6Vp-p	4Vp-p	4.6Vp-p	5Vp-p								
	VOLTAGE ADJ. RANGE (SVR1)	10.8 ~ 13.5V	13.5 ~ 17V	17 ~ 22V	22 ~ 27V	27 ~ 33V	33 ~ 40V	37 ~ 46V	43 ~ 53V	49 ~ 58V								
	CURRENT ADJ. RANGE(SVR2)	3.75 ~ 5A	3 ~ 4A	2.3 ~ 3A	1.9 ~ 2.5A	1.5 ~ 2A	1.3 ~ 1.7A	1.1 ~ 1.45A	1 ~ 1.3A	0.9 ~ 1.15A								
	VOLTAGE TOLERANCE Note.3	±10%																
	LINE REGULATION	±3.0%																
	LOAD REGULATION	±5.0%																
	SETUP TIME	1400ms / 230VAC 2800ms / 115VAC at full load																
INPUT	VOLTAGE RANGE Note.4	90 ~ 295VAC	127 ~ 417VDC															
	FREQUENCY RANGE	47 ~ 63Hz																
	POWER FACTOR (Typ.)	PF ≥ 0.9 at 75 ~ 100% load, 115VAC / 230VAC ; PF > 0.97 / 115VAC PF > 0.95 / 230VAC at full load																
	EFFICIENCY (Typ.)	86%	87%	88%	89%	90%	90%	90%	91%	91%								
	AC CURRENT (Typ.)	0.8A/115VAC	0.4A/230VAC															
	INRUSH CURRENT (Typ.)	45A/230VAC																
PROTECTION	LEAKAGE CURRENT	<0.75mA / 240VAC																
	OVER CURRENT	95 ~ 110%																
	SHORT CIRCUIT	Hiccup mode, recovers automatically after fault condition is removed																
	OVER VOLTAGE	14.5 ~ 17V	17.5 ~ 21V	22.8 ~ 26V	28 ~ 34V	34 ~ 38V	41 ~ 46V	47 ~ 52V	54 ~ 60V	59 ~ 65V								
	OVER TEMPERATURE	Protection type : Shut down o/p voltage, re-power on to recover 85°C ±10°C (RTH1)																
ENVIRONMENT	WORKING TEMP.	-30 ~ +70°C (Refer to output load derating curve)																
	WORKING HUMIDITY	20 ~ 95% RH non-condensing																
	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH																
	TEMP. COEFFICIENT	±0.03%/°C (0 ~ 50°C)																
	VIBRATION	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes																
SAFETY & EMC	SAFETY STANDARDS	UL8750, TUV EN61347-1, EN61347-2-13, IP66 approved																
	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC I/P-FG:1.88KVAC O/P-FG:0.5KVAC																
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH																
	EMI CONDUCTION & RADIATION	Compliance to EN55015																
	HARMONIC CURRENT	Compliance to EN61000-3-2 Class C (≥ 75% load) ; EN61000-3-3																
	EMS IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8,11; ENV50204, EN55024, EN61547, light industry level (surge 4KV), criteria A																
	MTBF	523.4Khrs min. MIL-HDBK-217F (25°C)																
OTHERS	DIMENSION	183*62.5*40.5mm (L*W*H)																
	PACKING	0.56Kg;24pcs/14.4Kg/1.11CUFT																
NOTE	1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. Direct connecting to LEDs is not suggested for models with "RIPPLE & NOISE" >±10% and using additional drivers is highly recommended. 3. Tolerance : includes set up tolerance, line regulation and load regulation. 4. Derating may be needed under low input voltage. Please check the static characteristics for more details. 5. Constant current operation region is within 75% ~100% rated output voltage. This is the suitable operation region for LED related applications, but please reconfirm special electrical requirements for some specific system design. 6. The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.																	


**Mechanical Specification**

Case No.993B Unit:mm

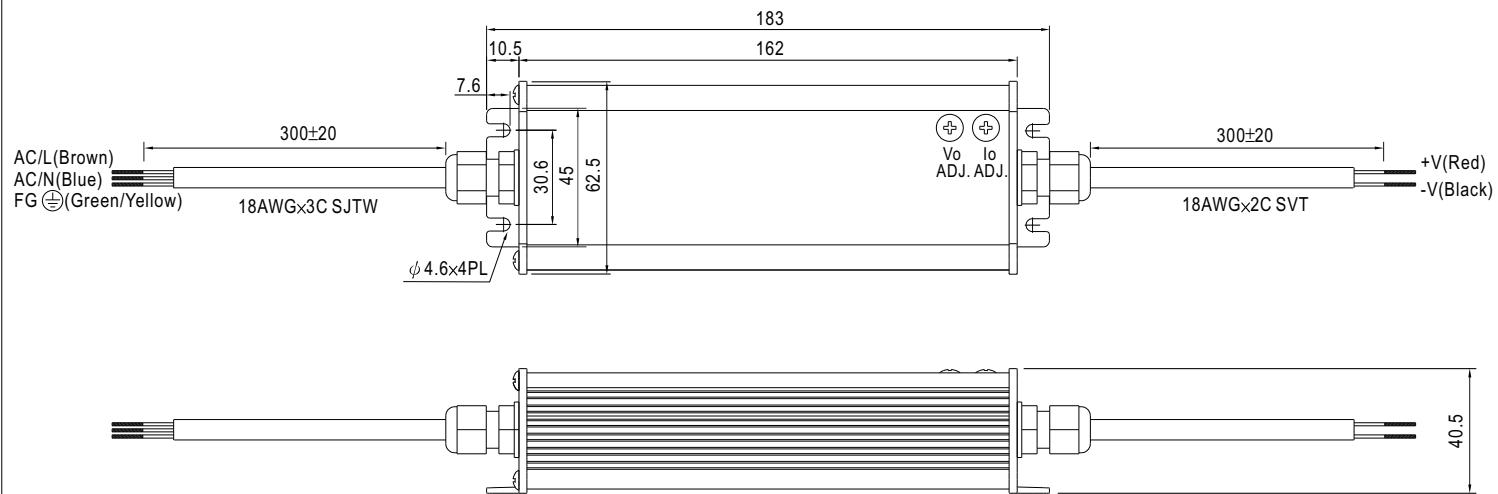


**Block Diagram**


fosc : 50KHz(115VAC)  
75KHz(230VAC)

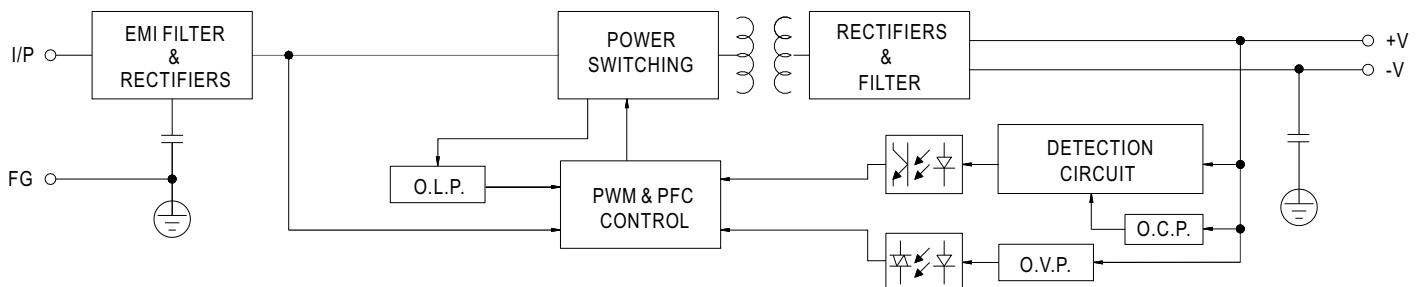

**Derating Curve**

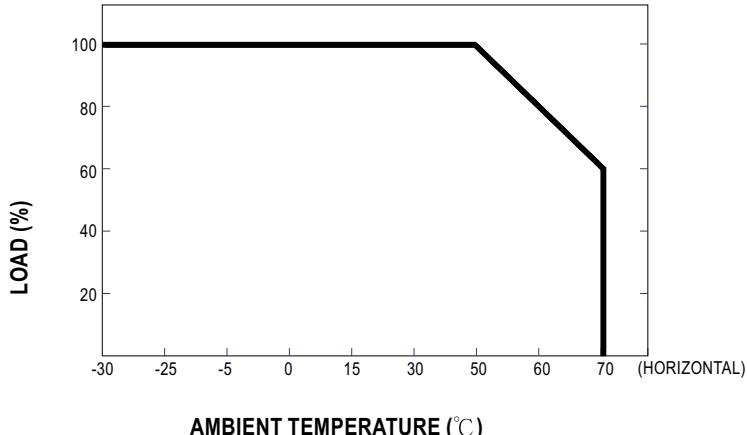


**Static Characteristics**

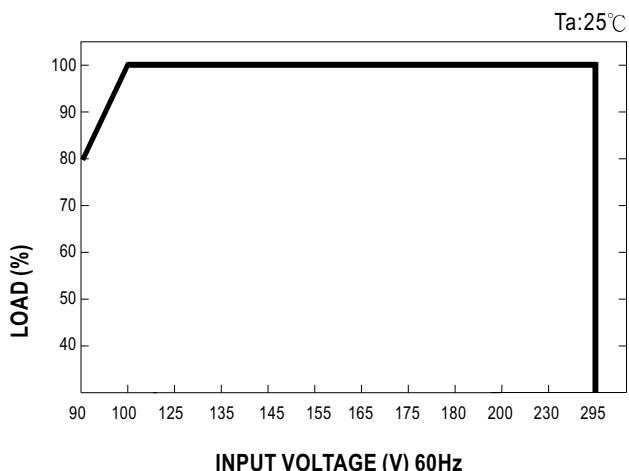

### ■ Power Factor Characteristic


Power factor will be higher than 0.9 when output loading is 75% or higher.

#### Constant Current Mode

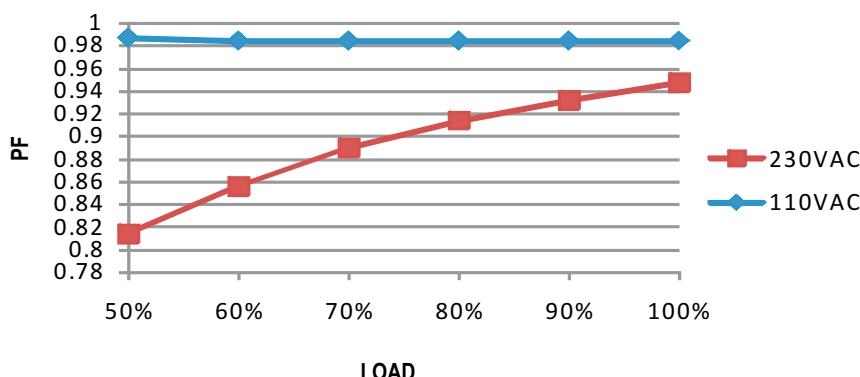

### ■ EFFICIENCY vs LOAD (48V Model)

CEN-60 series possess superior working efficiency that up to 91% can be reached in field applications.

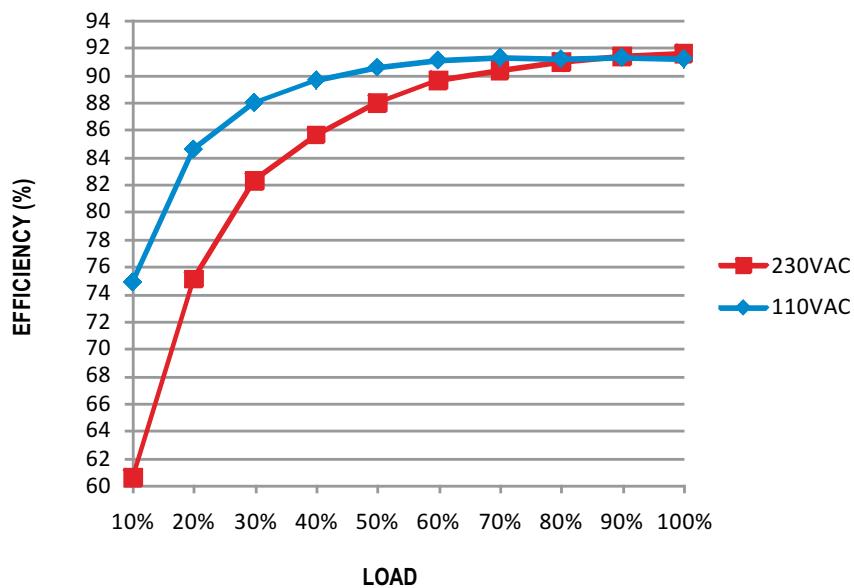


### ■ DRIVING METHODS OF LED MODULE

There are two major kinds of LED drive method "direct drive" and "with LED driver".

A typical LED power supply may either work in "constant voltage mode (CV) or constant current mode (CC)" to drive the LEDs.

Mean Well's LED power supply with CV+ CC characteristic can be operated at both CV mode [with LED driver, at area (A)] and CC mode [direct drive, at area (B)].

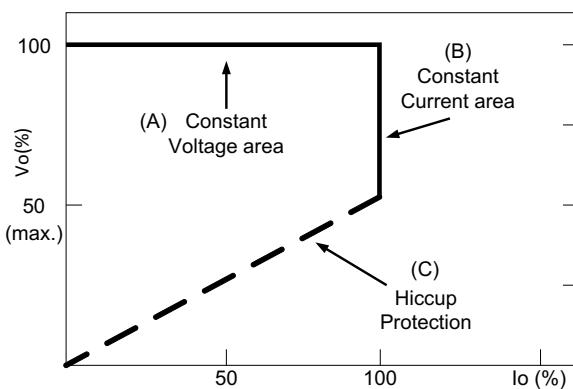

Typical LED power supply I-V curve