

| | | |
|---------------------------|---------------------------|---|
| 52103300 | DATA SHEET |  |
| Valid from: 24.11.2023 | SKINDICHT® SM-PE-M | |

The SKINDICHT® SM-PE-M is an earth-equipotential locknut, nickel-plated brass with metric thread.


The SKINDICHT® SM-PE-M is required wherever varnished, anodized and powder coated housings are used. When the locknut is tightened, it cuts through the insulating layer guaranteeing optimum contact.



Technical features:

| | |
|-------------------|--|
| Material | Brass, nickel plated Brass lead free, nickel plated |
| Size | M12x1.5 up to M110x2 acc. to DIN EN 60423 |
| Temperature range | -60°C up to +200°C |

Norm references:

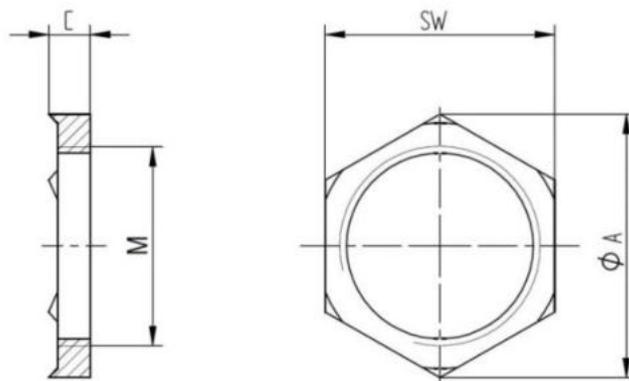

| Thread M | Wrench Size SW mm | Diameter Ø A mm | Thickness C mm | Article No. | |
|-------------|-------------------------|-----------------------|----------------------|-------------|-----------------|
| | | | | Brass | Brass Lead Free |
| M12x1,5 | 15 | 17,32 | 4,7 | 52103300 | 52103300LF |
| M16x1,5 | 19 | 21,94 | 4,7 | 52103310 | 52103310LF |
| M20x1,5 | 24 | 27,70 | 4,7 | 52103320 | 52103320LF |
| M25x1,5 | 30 | 34,60 | 5,2 | 52103330 | 52103330LF |
| M32x1,5 | 36 | 41,5 | 5,7 | 52103340 | 52103340LF |
| M40x1,5 | 46 | 53,1 | 6,5 | 52103350 | 52103350LF |
| M50x1,5 | 60 | 69,28 | 6,5 | 52103360 | 52103360LF |
| M63x1,5 | 70 | 80,83 | 7,0 | 52103370 | 52103370LF |
| M75x1,5 | 85 | 95 | 8 | 52103371 | - |
| M90x2 | 102 | 114 | 10 | 52103372 | - |
| M110x2 | 124 | 135 | 12 | 52103373 | - |

For more information please see our current catalogue. Please do not hesitate to contact our laboratory if there are any questions regarding resistance against aggressive agents and special oil.

| | | |
|---|---------------------------------------|-------------|
| Creator: MAU1 /PDP Released: DAMU1/PDP | Document: DB52103300EN Version: 09 | Page 1 of 1 |
|---|---------------------------------------|-------------|