

00009082	<b>DATA SHEET</b>	
Valid from: 26.05.2022	<b>EPIC® SIGNAL R 3.0 B1</b>	

## Description

- Circular connectors with solder termination
- 21-pin and 26-pin
- highest contact density at small space requirements
- Connector in solder version for easy maintenance



## General Characteristics

Series	SIGNAL R 3.0 B1
Number of contacts	21-pin / 26-pin
Pin configuration	Male E-part / Female P-part
Coding	N
Rated voltage (V)	24V AC / 60V DC
Rated impulse voltage	1,5 kV
Rated current (A)	7,5 A
Contact resistance	< 3 mOhm
Contacts	Copper alloy, gold plated
Termination methods	Solder termination: up to 1.0 mm <sup>2</sup>
Fastening type	M3 (4x)
Protection	IP 67 (maximum, dependant on used cable gland)
Cycle of mechanical operation	500
Temperature range	-40°C to +100°C, short-term up to +125°C

## Materials and Surfaces

Housing	Nickel plated copper alloy
Insert	Thermoplastic
Sealing	Chloroprene Rubber

## Versions


Article number	Article description	Version	Contacts	Pin configuration	Fastening type	Coding
00009082	EPIC® SIGNAL R 3.0 B1	male	1 - 21	E-Part	M3 (4x)	N
00009135	EPIC® SIGNAL R 3.0 B1	female	1 - 21	P-Part	M3 (4x)	N
00008978	EPIC® SIGNAL R 3.0 B1	female	1 - 26	P-Part	M3 (4x)	N

Creator: FICE1/PDP Released: VACH1/PDP	Document: DB00009082EN Version: 03	Page 1 of 3
---	---------------------------------------	-------------




00009082	<b>DATA SHEET</b>	
Valid from: 26.05.2022	EPIC® SIGNAL R 3.0 B1	

**Technical Drawings**

**Housing**

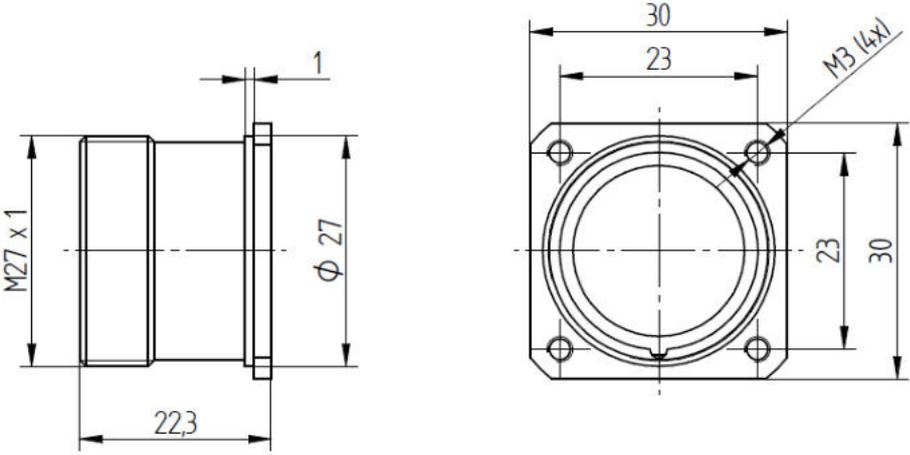

**Inserts (plug-side view)**

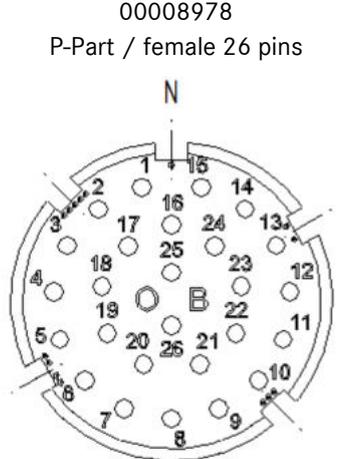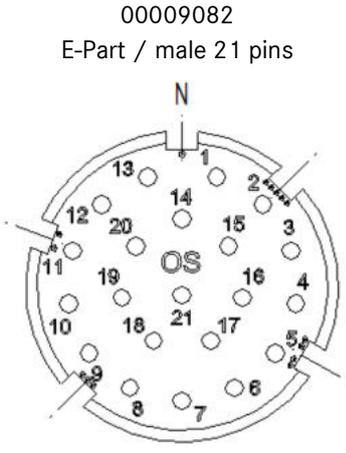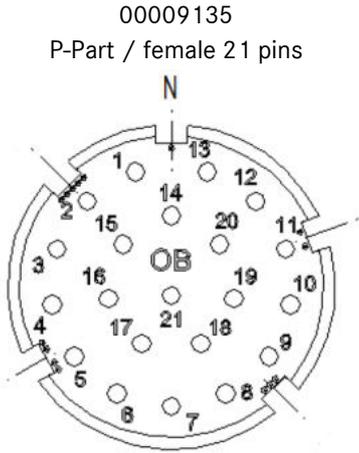

We reserve all rights according to DIN ISO 16016.  
 PD 0019/05\_04.18EN

00009082	<b>DATA SHEET</b>	
Valid from: 26.05.2022	<b>EPIC® SIGNAL R 3.0 B1</b>	



Corrosion-resistant



Industrial machinery and plant engineering



Mechanical resistance



Space requirement

### Application range

Machine and equipment manufacturing  
Measurement and control technology

### Remark

Photographs are not to scale and do not represent detailed images of the respective products.

Creator: FICE1/PDP Released: VACH1/PDP	Document: DB00009082EN Version: 03	Page 3 of 3
---	---------------------------------------	-------------