

6175 1790	DATA SHEET	
Valid from: 24.04.2018	SILVYN® ELU	

The protective conduit SILVYN® ELU consists of a flexible PVC sheath with a rigid PVC spiral. The inner wall is smooth, so the cables, wires and single cables are easily to pull in. Due to the flexibility, compressive and UV resistant strength the protection conduit can also be used in outdoor areas.



Material:

Spiral
Coat

Hard PVC
Soft PVC

Technical features:

Surface
Profile
Nominal size
Protection class

Smooth Inside
Integrated Spiral, strip wound
NW 12 up to NW 63
IP65 acc. to EN 60529
Depending on the used conduit gland
-20°C up to +70°C

Temperature range

Additional features:

Compressive strength
Bending resistance
Tensile strength
Self-extinguishing
UV-Resistant

Class 2 (600N) acc. to EN 61386
Flexible
Class 2 (250N) acc. to EN 61386
acc. to EN 61386-1

Color:

Black

Approbation:

 File No. E308201

Reference standards:


EN 61386-1

Suitable glands:


SILVYN® MPC-M
 SILVYN® MPC 45° M
 SILVYN® MPC 90° M
 SILVYN® MPC
 SILVYN® MPC 90°

For more information please see our current catalogue. Please do not hesitate to contact our laboratory if there are any questions regarding resistance against aggressive agents and special oil.

Creator: MAAU1/PDP Released: DAMU1/PDP	Document: DB6175 1790EN Version: 03	Page 1 of 2
---	--	-------------

6175 1790	DATA SHEET	
Valid from: 24.04.2018	SILVYN® ELU	

Product drawing:

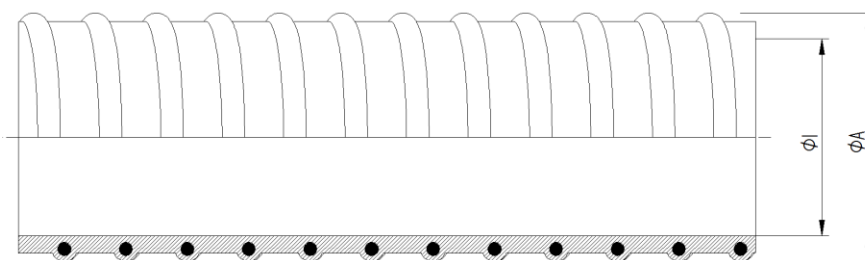

Dimension table:

Part No.	NW	Diameter mm		Max. Bending radius mm	Weight kg/m
		ØI	ØA		
6175 1790	12	10,0	14,5	25	0,1
6175 1791	16	12,0	16,5	25	0,15
6175 1792	20	16,0	21,0	35	0,17
6175 1793	25	22,0	27,5	45	0,2
6175 1794	30	25,0	30,5	55	0,22
6175 1795	32	28,0	33,5	60	0,25
6175 1796	40	35,0	41,0	80	0,28
6175 1797	50	40,0	46,4	105	0,3
6175 1798	63	50,0	57,0	120	0,38

Creator: MAU1/PDP Released: DAMU1/PDP	Document: DB6175 1790EN Version: 03	Page 2 of 2
--	--	-------------