

2172326	<b>DATA SHEET</b>	
Valid from: 01.12.2021	<b>IE-6A-M12X-S-(L*)-P-4-26-7-M12X-S</b>	

## Description

- Industrial Ethernet patchcord Cat.6<sub>A</sub>, shielded
- Straight M12-plug, x-coded and straight M12-plug, x-coded
- Based on ETHERLINE<sup>®</sup> Cat.7 FLEX (2170934)



## General characteristics

Connection method, connector	M12-plug, x-coded
Number of pins	8
Ambient temperature	-30°C to +90°C (-22°F to 194°F)
Degree of protection	IP 65, IP 67 (M12, plugged and locked)
Shielding	Shielded
Tightening torque	1.0 Nm (M12-connector)
Colour coding (pin assignment)	TIA/EIA-568-B
Conformity	RoHS conform REACH conform LABS free

## Variation

Data sheet also valid for variant lengths. Other lengths available on request.

Article	Description	Length (L*) [m]
2172326	IE-6A-M12X-S-0,5-P-4-26-7-M12X-S	0.5
2172327	IE-6A-M12X-S-1-P-4-26-7-M12X-S	1
2172328	IE-6A-M12X-S-2-P-4-26-7-M12X-S	2
2172329	IE-6A-M12X-S-3-P-4-26-7-M12X-S	3
2172330	IE-6A-M12X-S-5-P-4-26-7-M12X-S	5
2172331	IE-6A-M12X-S-7-P-4-26-7-M12X-S	7
2172332	IE-6A-M12X-S-10-P-4-26-7-M12X-S	10
2172333	IE-6A-M12X-S-15-P-4-26-7-M12X-S	15
2172334	IE-6A-M12X-S-20-P-4-26-7-M12X-S	20

## Electrical properties


Rated voltage	50 VAC / 60 VDC
Rated current at 40 °C	0.5 A
Pollution degree	3 (M12, plugged and locked)

## Transmission characteristics

Category (acc. ISO/IEC 11801)	6 <sub>A</sub>
-------------------------------	----------------

2172326	<b>DATA SHEET</b>	
Valid from: 01.12.2021	<b>IE-6A-M12X-S-(L*)-P-4-26-7-M12X-S</b>	

### Connector pin assignment

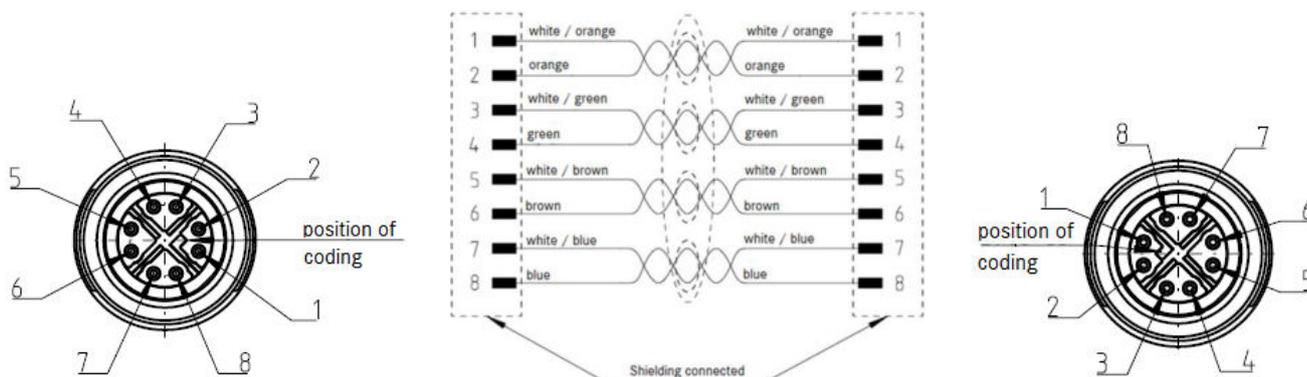

### Mechanical properties

#### M12-plug

Flammability class according to UL 94

Contact, material

Contact carrier, material

Housing, material

Knurl, material

Handle, material

TPU → HB

CuNi, gold plated


TPU, nature

Cu, nickel plated

Cu, nickel plated

TPU, black

### Cable (Lapp article number: 2170934)

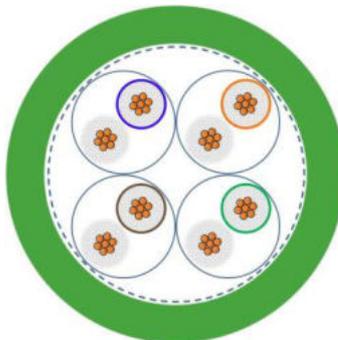

#### Design

Certification	E63634 cRUus AWM Style 21238 80°C 600V I/II A/B acc. to UL 758 & CSA C22.2 No.210
Conductor	stranded bare copper 26/7 AWG
Insulation	polyolefin (foamed) insulation-diameter: ca. 1.0 mm
Core identification code	pair 1: white/blue, pair 2: white/orange, pair 3: white/green, pair 4: white/brown (colored ring marking on the white cores is optional)
Stranding	2 cores stranded to pair, 4 pairs stranded to bundle
Pair screen	plastic laminated aluminium foil (overlapping)
Screen	braid of tinned copper wire (coverage ca. 70 %)
Outer sheath	PUR green, similar to RAL 6018 outer diameter: ca. 6.4 mm

Creator: FELI1/FEJA1/PDP Released: IVSE1/PDP	Document: DB2172326EN Version: 04	Page 2 of 3
---	--------------------------------------	-------------

2172326	<b>DATA SHEET</b>	
Valid from: 01.12.2021	<b>IE-6A-M12X-S-(L*)-P-4-26-7-M12X-S</b>	

### Electrical properties at 20°C

Loop resistance	≤ 29 Ω/100 m	
Insulation resistance	min. 5 GΩ x km	
Mutual capacitance	nom. 46 nF/km	
Characteristic impedance	100 Ω acc. to IEC 61156-6	
Maximum operating voltage	100 V (not for power applications)	
Test voltage	core/core:	2000 V
	core/screen:	2000 V


### Mechanical and thermal properties

Minimum bending radius	fixed: 4 × outer diameter
	occasional flexing: 10 × outer diameter
Temperature range	fixed: -50 °C up to +80 °C
	occasional flexing: -40 °C up to +80 °C
	UL/CSA: 80 °C
Flammability	flame retardant acc. to IEC 60332-1-2 resp. EN 60332-1-2 HFT acc. to UL 1581 §1090
Halogen free	acc. to VDE 0472-815
UV resistance	acc. to ISO 4892-2, method A
Oil resistance	acc. to EN 50363-10-2

### Standards

Product standard, M12-connector	IEC 61076-2-109
Generic cabling for customer premises – General requirements	DIN EN 50173-1 ISO/IEC 11801-1

### Technical drawing

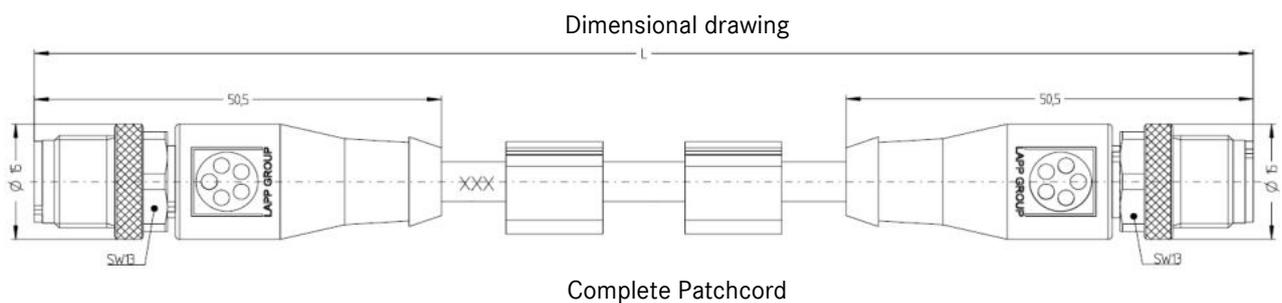

### Certification

Certified acc. to ECE R118

### Application range

Automation, industrial machinery and plant engineering

### Note

Photographs are not true to scale and do not represent detailed images of the respective products.

Creator: FELI1/FEJA1/PDP Released: IVSE1/PDP	Document: DB2172326EN Version: 04	Page 3 of 3
---	--------------------------------------	-------------