


| | | |
|---------------------------|-------------------------------|--|
| 27920304 | DATA SHEET |  |
| Valid from: 12.10.2018 | HITRONIC® HQW-Plus3000 | |

1. Product Description

Cable designation: A-DQ(ZN)B2Y(SR)2Y


Outdoor glass fibre optic cable with corrugated steel tape armour, central loose tube, non-metallic strength elements, longitudinally and laterally watertight, excellent rodent protection, robust and halogen-free cable sheath

2. Application


For use in outdoor, direct burial, campus backbone, WAN applications, and industrial environment

Methods of deployment: empty plastic pipes, ducts and trays or direct burial

3. Product Design

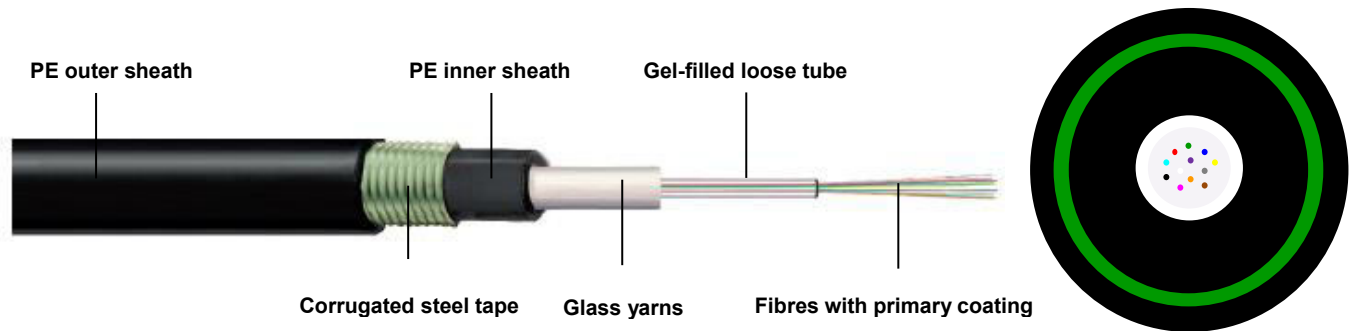

| | |
|--------------------------|--|
| Cable core | Central gel-filled loose tube with up to 24 glass fibres, water-blocking reinforced glass yarns, and an inner sheath |
| Cable inner sheath | Polyethylene (PE) inner sheath, halogen-free, UV and water-resistant |
| Cable outer sheath | Polyethylene (PE) outer sheath, halogen-free, UV and water-resistant |
| Colour of inner sheath | Black (RAL 9005) |
| Colour of outer sheath | Black (RAL 9005) |
| Colour of loose tube | Natural |
| Identification of fibres | Red, green, blue, yellow, grey, violet, brown, orange, white, pink, black, turquoise |
| Type of armouring | Corrugated steel tape |

| | | |
|---------------------------|-------------------------------|--|
| 27920304 | DATA SHEET |  |
| Valid from: 12.10.2018 | HITRONIC® HQW-Plus3000 | |

4. Optical and Physical Properties of Cabled Fibre (and Bare Fibre)

| Multimode fibre | | 50/125 µm | 50/125 µm | 50/125 µm | 62.5/125 µm |
|----------------------------|----------------------|-------------|-------------|-------------|---------------|
| | | OM4 | OM3 | OM2 | OM1 |
| Attenuation | @ 850 nm dB/km | ≤ 3.5 (2.5) | ≤ 3.5 (2.5) | ≤ 3.5 (2.5) | ≤ 3.5 (3.0) |
| | @ 1300 nm dB/km | ≤ 1.5 (0.7) | ≤ 1.5 (0.7) | ≤ 1.5 (0.7) | ≤ 1.5 (0.7) |
| Bandwidth | @ 850 nm MHz-km | ≥ 3500 | ≥ 1500 | ≥ 500 | ≥ 200 |
| | @ 1300 nm MHz-km | ≥ 500 | ≥ 500 | ≥ 500 | ≥ 500 |
| Numerical aperture | | 0.2 ± 0.015 | 0.2 ± 0.015 | 0.2 ± 0.015 | 0.275 ± 0.015 |
| Core diameter | µm | 50 ± 2.0 | 50 ± 2.0 | 50 ± 2.0 | 62.5 ± 2.5 |
| Cladding diameter | µm | 125 ± 1.0 | 125 ± 1.0 | 125 ± 1.0 | 125 ± 2 |
| Primary coating diameter | µm | 242 ± 5 | 242 ± 5 | 242 ± 5 | 245 ± 10 |
| Single-mode fibre | | 9/125 µm | | | |
| (ITU-T G.652.D) | | | | | |
| Attenuation | @ 1310 nm dB/km | | | | ≤ 0.4 (0.35) |
| | @ 1550 nm dB/km | | | | ≤ 0.4 (0.21) |
| Chromatic dispersion | @ 1310 nm ps/(nm-km) | | | | ≤ 3.0 |
| | @ 1550 nm ps/(nm-km) | | | | ≤ 18 |
| Zero dispersion wavelength | Nm | | | | 1300 – 1322 |
| Cut-off wavelength | Nm | | | | ≤ 1260 |
| PMD | ps/km | | | | ≤ 0.1 |
| Mode field diameter | µm | | | | 9.0 ± 0.4 |
| Cladding diameter | µm | | | | 125 ± 1 |
| Primary coating diameter | µm | | | | 242 ± 7 |


5. Thermal Properties

| | |
|--------------------------|----------------|
| Operating temperature | -40°C to +70°C |
| Installation temperature | -5°C to +50°C |
| Storage temperature | -40°C to +70°C |

6. Mechanical Properties

| | | | |
|------------------------------|------------|-----------|------------|
| Max. number of fibres | | 12 | 24 |
| Cable outer diameter (mm) | | 9.6 ± 0.3 | 12.6 ± 0.3 |
| Cable weight (kg/km) | | 95 | 135 |
| Min. bending radius (mm) | static | 15 x D | 15 x D |
| | dynamic | 20 x D | 20 x D |
| Max. tensile strength (N) | long-term | 3000 | 3000 |
| | short-term | 5000 | 5000 |
| Max. crush resistance (N/dm) | | 5000 | 5000 |

| | | |
|---|---------------------------------------|-------------|
| Creator: SACH3/PAM Released: ALTE1/PDC | Document: DB27920304EN Version: 01 | Page 2 of 3 |
|---|---------------------------------------|-------------|

| | | |
|---------------------------|-------------------------------|--|
| 27920304 | DATA SHEET |  |
| Valid from: 12.10.2018 | HITRONIC® HQW-Plus3000 | |

7. Chemical Properties

| | |
|-----------|--|
| PE sheath | Non-aging, halogen-free, good stability to acids and alkalis |
|-----------|--|

8. EU Directives

Not applicable for fibre optic cables

RoHS(2011/65/EU), Restriction of the use of Certain Hazardous Substances.

9. Approvals

- Environmental and mechanical tests comply to EN 187000 and IEC 60794
- Halogen free according to IEC 60754-1

10. Product Range Overview

| Article number | Article designation | Fibre type | No. of Fibres | Outer Ø (mm) |
|--------------------|---|--------------|---------------|--------------|
| Multimode | | | | |
| 27920304 | HITRONIC® HQW-Plus3000 4G 50/125 OM3 | 50/125 OM3 | 4 | 9.6 |
| 27920308 | HITRONIC® HQW-Plus3000 8G 50/125 OM3 | 50/125 OM3 | 8 | 9.6 |
| 27920312 | HITRONIC® HQW-Plus3000 12G 50/125 OM3 | 50/125 OM3 | 12 | 9.6 |
| 27920324 | HITRONIC® HQW-Plus3000 24G 50/125 OM3 | 50/125 OM3 | 24 | 12.6 |
| 27920204 | HITRONIC® HQW-Plus3000 4G 50/125 OM2 | 50/125 OM2 | 4 | 9.6 |
| 27920208 | HITRONIC® HQW-Plus3000 8G 50/125 OM2 | 50/125 OM2 | 8 | 9.6 |
| 27920212 | HITRONIC® HQW-Plus3000 12G 50/125 OM2 | 50/125 OM2 | 12 | 9.6 |
| 27920224 | HITRONIC® HQW-Plus3000 24G 50/125 OM2 | 50/125 OM2 | 24 | 12.6 |
| 27920104 | HITRONIC® HQW-Plus3000 4G 62.5/125 OM1 | 62.5/125 OM1 | 4 | 9.6 |
| 27920108 | HITRONIC® HQW-Plus3000 8G 62.5/125 OM1 | 62.5/125 OM1 | 8 | 9.6 |
| 27920112 | HITRONIC® HQW-Plus3000 12G 62.5/125 OM1 | 62.5/125 OM1 | 12 | 9.6 |
| 27920124 | HITRONIC® HQW-Plus3000 24G 62.5/125 OM1 | 62.5/125 OM1 | 24 | 12.6 |
| Single-mode | | | | |
| 27920904 | HITRONIC® HQW-Plus3000 4E 9/125 OS2 | 9/125 OS2 | 4 | 9.6 |
| 27920908 | HITRONIC® HQW-Plus3000 8E 9/125 OS2 | 9/125 OS2 | 8 | 9.6 |
| 27920912 | HITRONIC® HQW-Plus3000 12E 9/125 OS2 | 9/125 OS2 | 12 | 9.6 |
| 27920924 | HITRONIC® HQW-Plus3000 24E 9/125 OS2 | 9/125 OS2 | 24 | 12.6 |

| | | |
|---|---------------------------------------|-------------|
| Creator: SACH3/PAM Released: ALTE1/PDC | Document: DB27920304EN Version: 01 | Page 3 of 3 |
|---|---------------------------------------|-------------|

We reserve all rights according to DIN ISO 16016.

PD 0019/05_04.18EN