

5200 3130	DATA SHEET	
Valid from: 08.05.2018	SILVYN® SCH	

The SILVYN® SCH is a multi-range hose clamp, with worm drive.
The hose clamp is suitable for applications with higher mechanical stress.

Material:

Body	Stainless steel, blanc
Screw	Steel, zinc plated
Band	Stainless steel, blanc



Technical Features:

Screw	Worm drive with cross recess and width across flats 7
Clamping range	10 up to 60mm

Additional features:

Resistant to corrosion

Reference standards:

DIN 3017-1

Suitable conduit gland:

SILVYN® SSV
SILVYN® SSV-M
SILVYN® SSVZ
SILVYN® SSVZ-M

Suitable conduits:


SILVYN® SI
SILVYN® SP
SILVYN® SP-PU

For more information please see our current catalogue. Please do not hesitate to contact our laboratory if there are any questions regarding resistance against aggressive agents and special oil.

Creator: MAAU1/PDP Released: DAMU1/PDP	Document: DB52003130EN Version: 01	Page 1 of 2
---	---------------------------------------	-------------

5200 3130	DATA SHEET	
Valid from: 08.05.2018	SILVYN® SCH	

Product drawing:

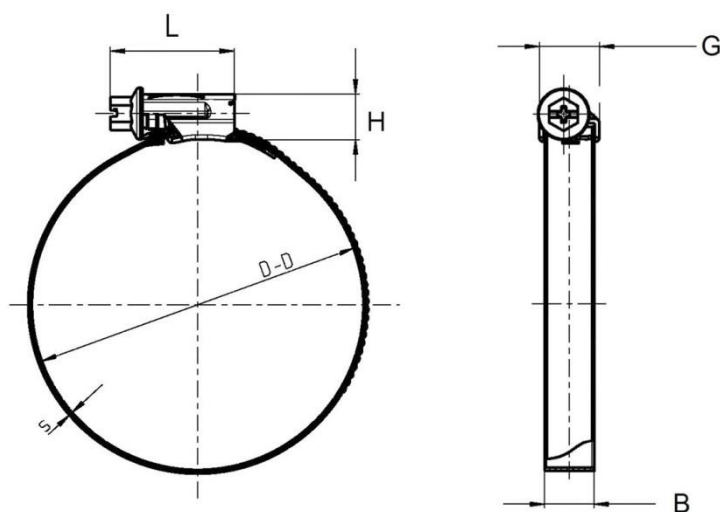

Dimension table:

Part No.	Clamping range D-D mm	Belt thickness S mm	Belt range B mm	Body length L mm	Body high H mm	Body width G mm
5200 3130	10 – 16	0,6	7,5	17,0	9,0	11,5
5200 3140	12 – 20	0,65	9,0	24,0	11,0	13,0
5200 3160	16 – 25	0,65	9,0	24,0	11,0	13,0
5200 3170	20 – 32	0,65	9,0	24,0	11,0	13,0
5200 9050	25 – 40	0,65	9,0	26,0	11,0	13,0
5200 9061	35 – 50	0,8	12,0	30,0	11,0	14,6
5200 9040	40 – 60	0,8	12,0	30,0	11,0	14,6