

29500764	DATA SHEET	
Valid from: 31.08.2021	EPIC® DATA TS GOF SC-RJ (F*)	

Description

- LWL-DIN adapter with ready-made coupling
- Available with SC-RJ-coupling
- Space-saving design for DIN rail TH35
- Designed for industrial environment (protection class IP20)



General characteristics

Interfaces

Housing front:

Mounted couplings SC-RJ

Housing rear:

DIN rail TH35

Coupling type

SC-RJ

Temperature range (environmental)

-10°C to +60°C (+14°F to +140°F)

Degree of protection

IP 20

Variation

Article	Description	Usable fibertype (F*)	Coupling color
29500764	EPIC DATA TS GOF SC-RJ MM	MM	Beige
29500765	EPIC DATA TS GOF SC-RJ SM	SM	Green

Optical properties

Insertion loss (coupling)

max. 0.2 dB

Mechanical properties

Housing

Color

RAL 7035

Mounting

DIN rail (TH35)

Housing, material

PC

Spring element, material

Bronze, tin-plated

Couplings

Slotted sleeve

Ceramic

Mechanical life span

≥ 500

Standards

Product standard, LWL-connector type SC-RJ

IEC 61754-24

Dimensions of low-voltage switchgear and controlgear

DIN 60715

Standardized mounting rails for the mechanical fastening of electrical devices in switchgear systems

Creator: FELI1/PDP Released: IVSE1/PDP	Document: DB29500764EN Version: 00	Page 1 of 2
---	---------------------------------------	-------------


We reserve all rights according to DIN ISO 16016.

PD 0019/05_04.18EN

29500764	DATA SHEET	
Valid from: 31.08.2021	EPIC® DATA TS GOF SC-RJ (F*)	

Technical drawing

Dimensional drawing

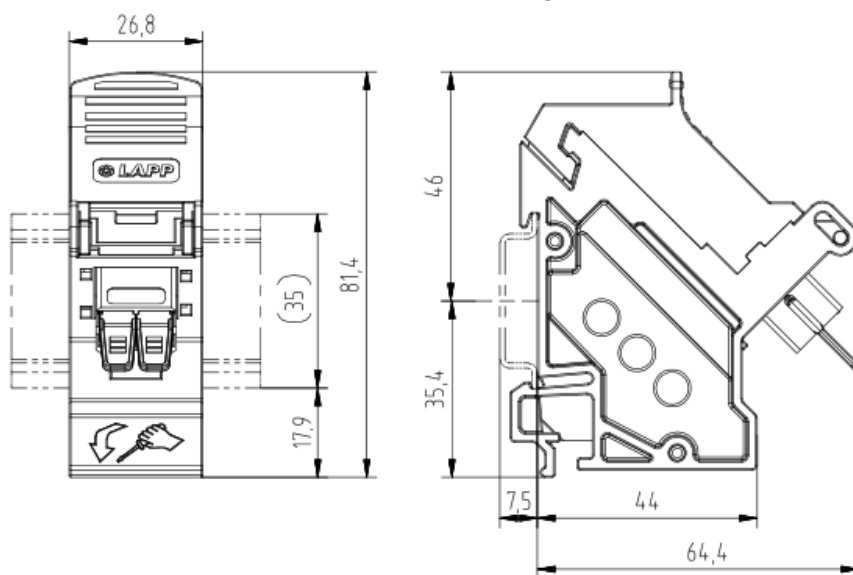

EPIC DATA TS GOF SC-RJ

Application range

Automation, industrial machinery and plant engineering

Note

Photographs are not to scale and do not represent detailed images of the respective products.

Creator: FELI1/PDP Released: IVSE1/PDP	Document: DB29500764EN Version: 00	Page 2 of 2
---	---------------------------------------	-------------