

52021070	DATA SHEET	
Valid from: 06.06.2023	SILVYN® SSVZ	

By the SILVYN® SSVZ bargain it a conduit clamp gland which is made of nickel plated brass, with cable strain relief and cable sealing. By the special bosh lugs is a simply assembling and strain relief of the conduit warranted.
For an additional protection the conduit can combined with a clamp SILVYN® SCH.



Material:

Body	Brass, nickel plated
Sealing	NBR
O-Ring	CR

Technical Features:

Connecting thread	PG 9 up to PG48 acc. to DIN 40430
Nominal wide	NW 14 up to NW 56
Protection class	IP54 and IP68 acc. to EN 60529
Temperature range	Depending on the used conduit -20°C up to +80°C

Approbation:



Reference standards:

EN 61386-1

Suitable conduits:


SILVYN® SI
SILVYN® SP
SILVYN® SP-PU

For more information please see our current catalogue. Please do not hesitate to contact our laboratory if there are any questions regarding resistance against aggressive agents and special oil.

Creator: FICE1/PDP Released: VACH1/PDP	Document: DB52021070EN Version: 02	Page 1 of 2
---	---------------------------------------	-------------

52021070	DATA SHEET	
Valid from: 06.06.2023	SILVYN® SSVZ	

Product drawing:

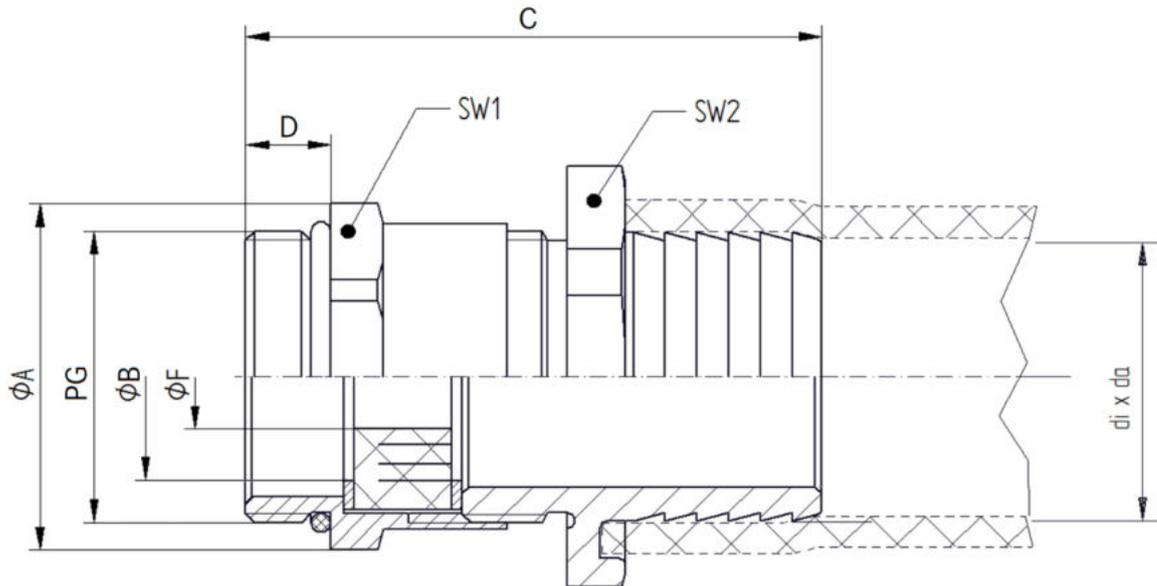

Dimension table:

Article No.	di x da	PG	D [mm]	C [mm]	ØF [mm] Incised sealing ring	ØB [mm]	ØA [mm]	SW1 [mm]	SW2 [mm]
52021070	10 x 14	PG9	6,0	39,1	5 / 8	8	19,0	17	19
52021080	12 x 16	PG9	6,0	39,1	5 / 8	10	19,0	17	19
52003020	14 x 18	PG11	6,0	39,6	7 / 10 / 12,5	12	22,2	20	22
52024670	16 x 20	PG11	6,0	39,6	7 / 10 / 12,5	12	22,2	20	22
52003030	18 x 23	PG13,5	6,5	43,1	7 / 10,5 / 13 / 16	14	24,4	22	25
52003040	22 x 27	PG16	6,5	44,1	8 / 10,5 / 13,5 / 16	16	26,7	24	30
52003050	23 x 28	PG21	7,0	48,1	11 / 15 / 18 / 20	21	33,5	30	32
52003060	30 x 36	PG29	8,0	53,6	18 / 23 / 27 / 31	27	43,5	40	40
52024680	32 x 38	PG29	8,0	53,6	18 / 23 / 27 / 31	30	43,5	40	42
52014000	38 x 44	PG36	9,0	61,6	24 / 28 / 31 / 35	34	54,0	50	52
52014010	45 x 51	PG42	10,0	68,6	30 / 35,5 / 39 / 42,5	41	61,0	57	57
52014020	50 x 56	PG48	10,0	71,6	36 / 40 / 44 / 47	46	69,0	64	64