The SKINDICHT® MA-PG/M is a reducer from an outer PG-thread to an inner metric thread.

## Components

| | **Brass** | **brass lead-free** |
|---|---|---|
| Material | brass, nickel-plated | brass lead-free, nickel-plated |

## Technical features:

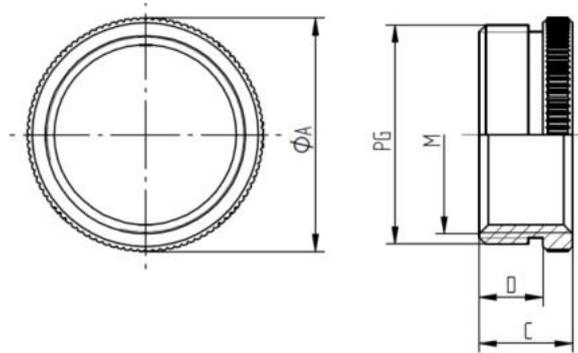| | |
|---|---|
| External thread | PG7 up to PG36 acc. to DIN 40430 |
| Internal thread | M12x1.5 up to M40x1.5 acc. to EN 60423 |
| Design | Form A    Knurl |
| | Form B    Smooth |
| Temperature range | -60°C up to +200°C |

## Norm references:

CE

## SKINDICHT® MA-PG/M    Form A



| External thread PG | Internal thread M | Diameter Ø A mm | Length C mm | Thread length D mm | Part No. brass | Part No. brass lead-free |
|---|---|---|---|---|---|---|
| PG 11 | M16x1.5 | 20 | 8,5 | 6 | 52104492 | 52104492LF |
| PG 16 | M20x1.5 | 24 | 9,5 | 6,5 | 52104495 | 52104495LF |
| PG 21 | M20x1.5 | 30 | 10 | 7 | 52104497 | 52104497LF |
| PG 21 | M25x1.5 | 30 | 10 | 7 | 52104498 | 52104498LF |
| PG 29 | M25x1.5 | 39 | 11,5 | 8 | 52104500 | 52104500LF |
| PG 29 | M32x1.5 | 39 | 11,5 | 8 | 52104501 | 52104501LF |
| PG 36 | M40x1.5 | 50 | 12,5 | 9 | 52104503 | 52104503LF |

## SKINDICHT® MA-PG/M    Form B
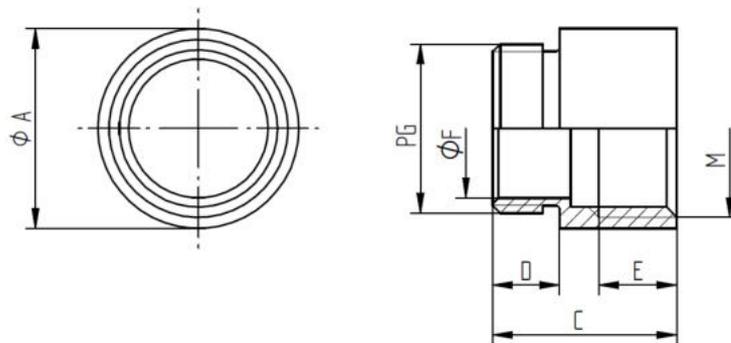


| External thread PG | Internal thread M | Diameter Ø A mm | Length C mm | Thread length D mm | Thread length E mm | Diameter Ø F mm | Part No. brass | Part No. brass lead-free |
|---|---|---|---|---|---|---|---|---|
| PG 7 | M12x1,5 | 14 | 15 | 5 | 6 | 10 | 52104490 | 52104490LF |
| PG 9 | M16x1,5 | 18 | 16,5 | 6 | 7 | 12,5 | 52104491 | 52104491LF |
| PG 11 | M20x1,5 | 22 | 18,5 | 6 | 8,5 | 15 | 52104493 | 52104493LF |
| PG 13,5 | M20x1,5 | 22 | 19 | 6,5 | 8,5 | 17 | 52104494 | 52104494LF |
| PG 16 | M25x1,5 | 27 | 21 | 6,5 | 8,5 | 18,5 | 52104496 | 52104496LF |
| PG 21 | M32x1,5 | 34 | 23 | 7 | 10 | 24 | 52104499 | 52104499LF |
| PG 29 | M40x1,5 | 42 | 25,5 | 8 | 11 | 32 | 52104502 | 52104502LF |

For more information please see our current catalogue. Please do not hesitate to contact our laboratory if there are any questions regarding resistance against aggressive agents and special oil.