

| | | |
|---------------------------|-----------------------|---|
| 52005949 | DATA SHEET |  |
| Valid from: 03.07.2018 | SKINDICHT® BLK | |

The SKINDICHT® BLK blind plug is made of polystyrene and used wherever thread openings must be closed.




Technical features:

| | |
|-------------------|--|
| Connecting thread | PG7 up to PG48 acc. to DIN 40430 |
| Material | Polystyrene |
| Temperature | -20 °C up to +70 °C |
| Colour RAL | RAL 7035, light-grey On request mounted with O-ring |
| Protections class | IP54 acc. to EN 60529 IP68 with O-Ring |
| Sizes | acc. to DIN 46320 |

Norm references:



| PG-thread | Ø A [mm] | C [mm] | D [mm] | Article No. |
|-----------|----------|--------|--------|-------------|
| PG 7 | 15 | 8 | 6 | 52005949 |
| PG 9 | 19 | 9 | 6 | 52005950 |
| PG 11 | 22 | 10,5 | 7 | 52005960 |
| PG 13,5 | 25 | 10 | 6,5 | 52005970 |
| PG 16 | 27 | 10 | 6,5 | 52005980 |
| PG 21 | 33 | 12 | 8 | 52005990 |
| PG 29 | 44 | 12 | 8 | 52006000 |
| PG 36 | 55 | 15 | 10 | 52006010 |
| PG 42 | 62 | 16 | 10 | 52006020 |
| PG 48 | 69 | 17 | 12 | 52006030 |

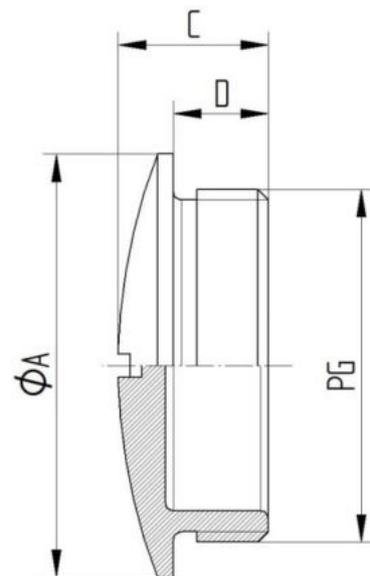

For more information please see our current catalogue. Please do not hesitate to contact our laboratory if there are any questions regarding resistance against aggressive agents and special oil.

| | | |
|---|---------------------------------------|-------------|
| Creator: M. Jurak /PDP Released: DAMU1/PDP | Document: DB52005949EN Version: 03 | Page 1 of 1 |
|---|---------------------------------------|-------------|