


| | | |
|---------------------------|------------------------------|---|
| 53801035 | DATA SHEET |  |
| Valid from: 23.10.2024 | SKINDICHT® JT PTFE PG | |

The SKINDICHT® JT PTFE PG sealing ring used for reliable sealing against oil, dust and water on the connecting thread of a gland or similar components. There is an extraordinary resistance against oil, water, acid, solvents and chemicals. Moreover this sealing ring is physiologically harmless and can be used in foodstuffs sector.



Technical features:

| | |
|-------------------|-----------------------|
| Material | PTFE |
| Sizes | PG7 up to PG48 |
| Colour | White |
| Temperature range | -200 °C up to +260 °C |

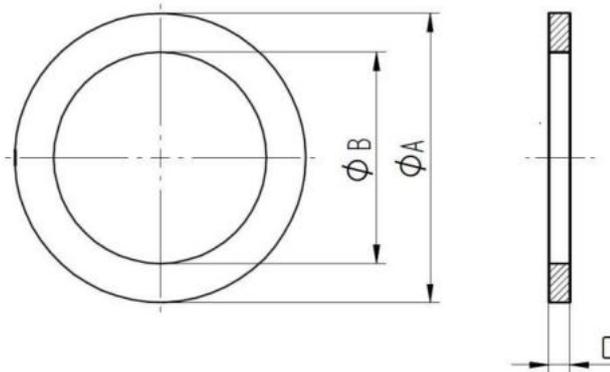

| Article designation | Ø A [mm] | Ø B [mm] | C [mm] | Article No. |
|---------------------|----------|----------|--------|-------------|
| JT 7 | 16,5 | 12,5 | 2 | 53801035 |
| JT 9 | 19 | 15,2 | 2 | 53801045 |
| JT 11 | 22,5 | 18,6 | 2 | 53801055 |
| JT 13,5 | 25 | 20,4 | 2 | 53801065 |
| JT 16 | 27 | 22,5 | 2 | 53801075 |
| JT 21 | 33,5 | 28,3 | 3 | 53801085 |
| JT 29 | 43,5 | 37 | 3 | 53801095 |
| JT 36 | 55 | 47 | 3 | 53801105 |
| JT 42 | 63 | 54 | 3 | 53801115 |
| JT 48 | 69 | 59,3 | 3 | 53801125 |

For more information please see our current catalogue. Please do not hesitate to contact our laboratory if there are any questions regarding resistance against aggressive agents and special oil.

| | | |
|---|---------------------------------------|-------------|
| Creator: MAU1 /PDP Released: DAMU1/PDP | Document: DB53801035EN Version: 04 | Page 1 of 1 |
|---|---------------------------------------|-------------|