

381166105	DATA SHEET	
Valid from: 10.11.2023	EPIC POWER M23 D6 5+PE CF TWIST	

Description

- Circular connectors for servomotors and power supply
- High power at smallest installation space
- Optimal solution for electric motors
- EMC-optimised design
- Safety use in field environment by high protection class
- Cable clamp for EPIC® POWER M23
- With seal
- Cap Nut
- Contact carrier
- Insulating sleeve
- PE-spring



General characteristics

Series	EPIC® POWER M23 D6 housingtype: TWIST, cable clamp, cap Nut, inserts
Version	Cable connector, package unit = 1 pcs
Number of poles	Female, 5+PE
Connection type	Crimp termination
Temperature range	-25 to +125 °C
Connection cross section for 2 mm contacts	0,5 mm ² - 2,5 mm ²

Mechanical characteristics

Cycles of mechanical operation	500
--------------------------------	-----

Electrical characteristics

Rated voltage for 2 mm contacts	630 V
Rated impulse voltage	6 kV
Rated current	25 A
Contact resistance working signal contacts	< 4 mOhm
Contact resistance PE- contact	< 100 mOhm
Degree of soiling	3

Product Variations

Article number	Article	Cable clamping range in [mm]
381166105	EPIC POWER M23 D6 5+PE CF TWIST 8,5-11 (1)	8,5 - 11
381166106	EPIC POWER M23 D6 5+PE CF TWIST 10,5-15,5(1)	10,5 - 15,5
381166107	EPIC POWER M23 D6 5+PE CF TWIST 7.5-15,5,(1)	7,5- 15,5

Creator: STKU3/PDP Released: IVSE1/PDP	Document: DB381166105EN Version: 00	Page 1 of 3
---	--	-------------

381166105	DATA SHEET	
Valid from: 10.11.2023	EPIC POWER M23 D6 5+PE CF TWIST	

Materials and surfaces

Housing	Nickel-plated zinc die-casting
Coupling sleeve	Nickel-plated zinc die-casting
Clamping ring	Spring steel, coated
Cable clamp	PA
Tube sealing ring	CRNBR
O-ring	FKM
Cap Nut	Nickel-plated Copper Alloy
Contact carrier	PA
Insulating sleeve	PA
PE spring	Copper Alloy
TWIST- spring	Copper-Alloy

Approvals


UL-File-Number	Approval in pending
----------------	---------------------

Standard

Safety Standard	IEC 61984
-----------------	-----------



Technical Drawing

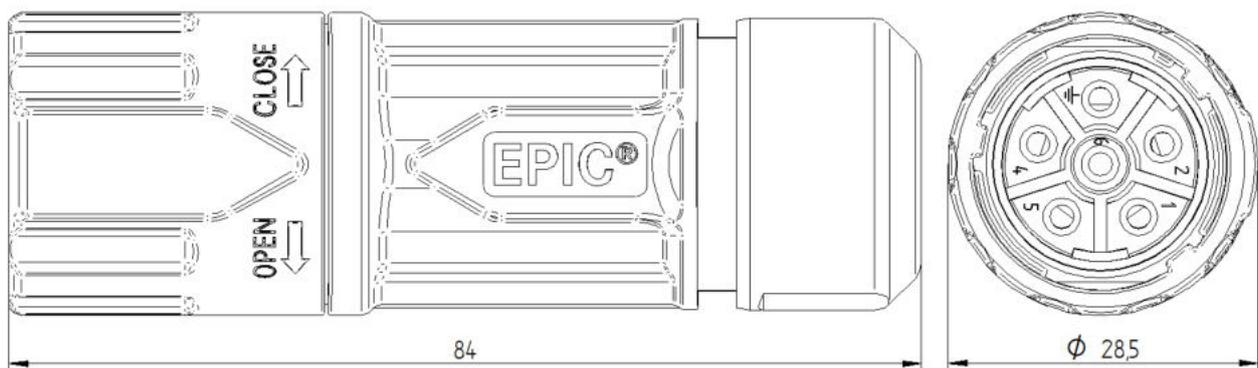

Item	Wrench size
housing	24
Cap nut	26 / 27 (7,5-15,5)

Creator: STKU3/PDP Released: IVSE1/PDP	Document: DB381166105EN Version: 00	Page 2 of 3
---	--	-------------

381166105	DATA SHEET	
Valid from: 10.11.2023	EPIC POWER M23 D6 5+PE CF TWIST	



Good chemical resistance




Corrosion-resistant



Industrial machinery and plant engineering



Mechanical resistance



Optimum strain relief



Waterproof

Application range

Plant engineering
Servo drives and servo assemblies

Remark

Photographs are not to scale and do not represent detailed images of the respective products.

Creator: STKU3/PDP Released: IVSE1/PDP	Document: DB381166105EN Version: 00	Page 3 of 3
---	--	-------------