

21700129	<b>DATA SHEET</b>	
Valid from: 17.06.2020	<b>ETHERLINE ACCESS U08GT</b>	

## Description

- Fast Ethernet Network-Switch (10/100/1000BaseT(X)), unmanaged
- Ports: 8x RJ45
- Suitable for harsh industrial environment (Protection class IP30)



## General characteristics

Interfaces & buttons	<b>RJ45 Port:</b> 10/100/1000BaseT(X) auto-negotiation, full-/halfduplex-mode and Auto-MDI/MDI-X-connection
	<b>DIP-switch</b> Activate/deactivate Broadcast Storm Protection Activate/deactivate Jumbo Frames
Switch properties	MAC- tablesize: 8 K packet-bufferize: 4 Mbit packet forwarding rate: 11.90 Mpps Jumbo Frame Size: 9.6 KB (max.)
Temperature range	operating temp.: -10°C to +60°C (14°F to 140°F) storage temp.: -40°C to +85°C (-40°F to 185°F)
Relative humidity	5% to 95 % (non-condensing)
Standards	IEEE 802.3i (10BaseT) IEEE 802.3u (100BaseTX) IEEE 802.3ab (1000Base-T)
Processing type	Store and Forward
MTBF (mean time between failures)	2.486.867 Std @ Telcordia (Bellcore), GB

## Power requirements

Connection	1 removable 4- pole terminal block
Input voltage	24 V AC /V DC (18-30V AC, 50/60Hz; 12-48V DC)
Power Consumption (max.)	10 W
Input current (max.)	0.85 A
Overload current protection	support
Reverse polarity protection	support
Redundancy protection	support

## Physical properties


Housing	metal
IP class	IP30
Weight	0.5 kg
Installation	DIN-rail mounting

Creator: FELI1/PDP Released: IVSE1/PDP	Document: DB21700129EN Version: 00	Page 1 of 2
---	---------------------------------------	-------------

21700129	<b>DATA SHEET</b>	
Valid from: 17.06.2020	<b>ETHERLINE ACCESS U08GT</b>	

## Technical drawing

Dimensional drawing

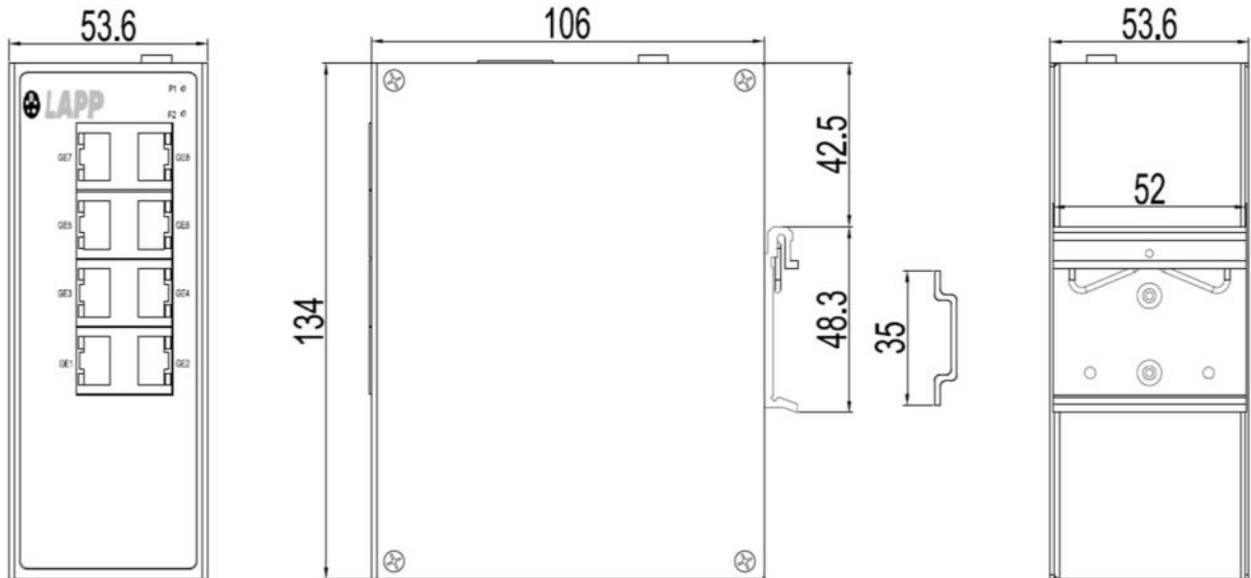

## Standards and approvals

Safety	UL61010
EMC	EN55022/CISPR22 Class A
EMI	FCC CFR47 Part 15
EMS	IEC 61000-4-2 ESD: contact: 6kV / air: 8kV IEC 61000-4-3 RS: 80Mhz to 2GHz: 10V/m IEC 61000-4-4 EFT/Burst: Power: 2kV / Signal: 1kV IEC 61000-4-5 Surge: Power: 1kV / Signal: 1kV IEC 61000-4-6 CS: 10V (150 kHz – 80 MHz)
Vibration	according IEC 60068-2-6
Shock	according IEC 60068-2-27
Free fall	according IEC 60068-2-31
Approvals	CE UL (E331560) FCC

## Application range

Automation, industrial machinery and plant engineering

## Note

Photographs are not to scale and do not represent detailed images of the respective products.

Creator: FELI1/PDP Released: IVSE1/PDP	Document: DB21700129EN Version: 00	Page 2 of 2
---	---------------------------------------	-------------