

|                           |                   |                                                                                     |
|---------------------------|-------------------|-------------------------------------------------------------------------------------|
| 10016000                  | <b>DATA SHEET</b> |  |
| Valid from:<br>06.11.2024 | <b>EPIC® ZW M</b> |                                                                                     |

Description

- Hexagon intermediate adapter with metric connection thread.
- Enables the use of screw connections with metric threads in metric housing bores.
- The use of an O-ring makes it possible to increase the degree of protection.



General Characteristics

|                                 |                     |
|---------------------------------|---------------------|
| Series                          | EPIC ZW M           |
| Version                         | without O-Ring      |
| Gland Body                      | See Table           |
| Protection Class (DIN EN 60529) | IP 65 (with O-Ring) |
| Temperature                     | -60 °C to 200 °C    |

Materials


|                   |               |
|-------------------|---------------|
| O-Ring            | NBR           |
| Gland Body        | Brass         |
| Oberflächenschutz | Nickel-plated |

Ausführungen

| EPIC-Articel No. | Description  | Inner/outer thread |
|------------------|--------------|--------------------|
| 10016000         | EPIC® ZW M20 | M20                |
| 10016001         | EPIC® ZW M25 | M25                |
| 10016002         | EPIC® ZW M32 | M32                |
| 10016003         | EPIC® ZW M40 | M40                |

|                           |                   |                                                                                     |
|---------------------------|-------------------|-------------------------------------------------------------------------------------|
| 10016000                  | <b>DATA SHEET</b> |  |
| Valid from:<br>06.11.2024 | <b>EPIC® ZW M</b> |                                                                                     |

Technical Drawings

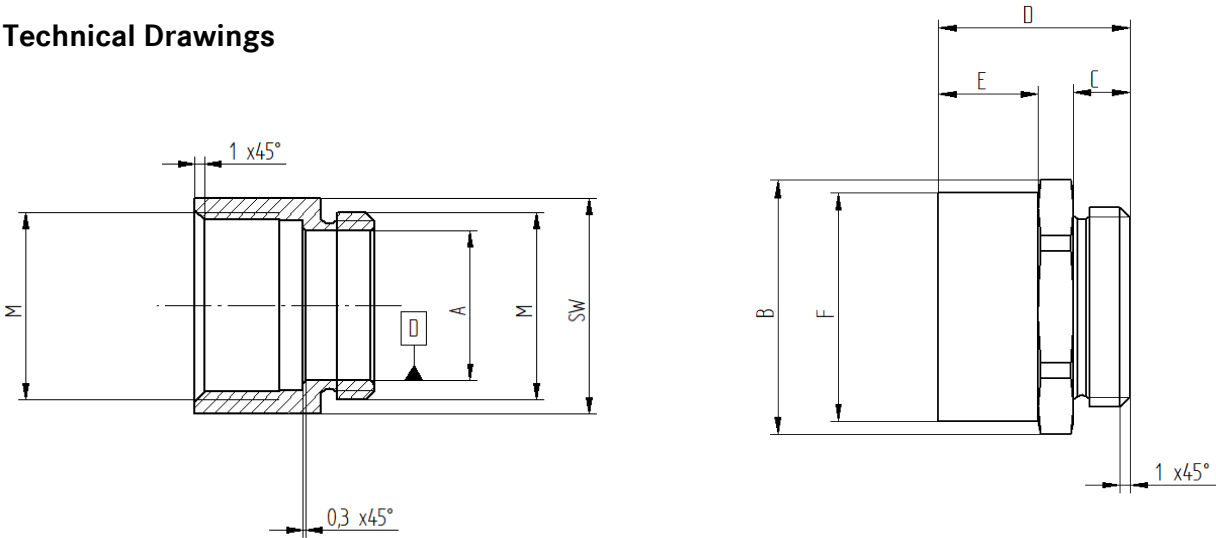

| EPIC-Article No. | Description  | M       | SW | A (mm) | B (mm) | C (mm) | D (mm) | E (mm) | F (mm) |
|------------------|--------------|---------|----|--------|--------|--------|--------|--------|--------|
| 10016000         | EPIC® ZW M20 | M20x1,5 | 23 | 16     | 25,5   | 5,7    | 19,2   | 10     | 23     |
| 10016001         | EPIC® ZW M25 | M25x1,5 | 28 | 20     | 31     | 5,9    | 20,4   | 11     | 28     |
| 10016002         | EPIC® ZW M32 | M32x1,5 | 36 | 27     | 40     | 6,4    | 23,9   | 12,5   | 35     |
| 10016003         | EPIC® ZW M40 | M40     | 46 | 35     | 51     | 6,7    | 27,2   | 14,5   | 43     |



Mechanical and plant engineering



mechanical resistance



Robust



Waterproof

Anwendungsgebiete

Anlagenbau, Kunststoffindustrie

Hinweis

Die Fotografien sind nicht maßstäblich und keine detailgetreuen Abbildungen der jeweiligen Produkte.

|                                                   |                                       |             |
|---------------------------------------------------|---------------------------------------|-------------|
| Creator: THB01/BU-EPIC<br>Released: IVSE1/BU-EPIC | Document: DB10016000EN<br>Version: 00 | Page 2 of 2 |
|---------------------------------------------------|---------------------------------------|-------------|