


|                           |                                       |
|---------------------------|---------------------------------------|
| 61721300                  | <b>DATA SHEET</b>                     |
| Valid from:<br>16.09.2020 | <b>SCHIRMKLEMME EMC-GUARD DINrail</b> |

The shield clamp on clip foot can be snapped onto a 35mm DIN rail without the use of tools. Just press the cable shield into the shield clamp to achieve a safe contact. The strain relief provides the possibility of reducing strain on the cable sheath by using a cable tie.

#### Material:

spring steel,  
Galvanic plated

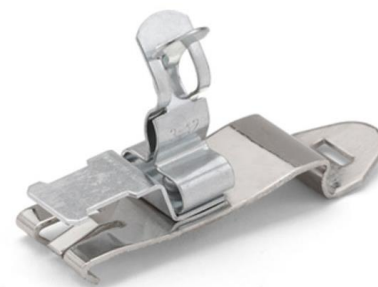

#### Technical features:

Mounting  
Clamping range




35mm DIN rail  
3 - 18mm

#### Features:

Strain relief  
Attenuation of conductance

with cable tie acc. to DIN 62444  
up to 40dB by 30 MHz

#### Technical drawing

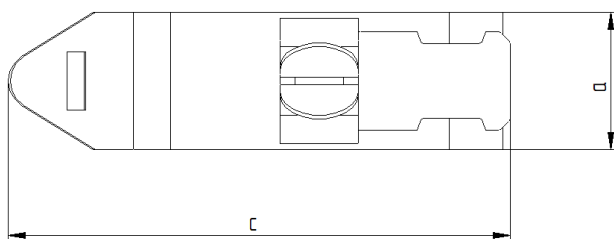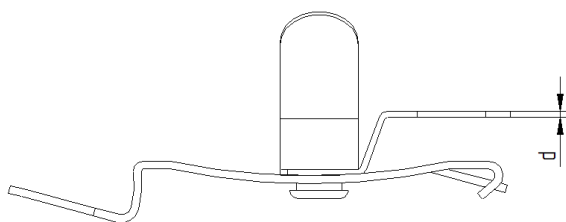

#### Dimensions:

| Part No   | Wide<br>a<br>mm | Length<br>c<br>mm | Thickness<br>d<br>mm | High<br>h<br>mm | Clamping range<br>Ø F<br>mm |
|-----------|-----------------|-------------------|----------------------|-----------------|-----------------------------|
| 6172 1300 | 14              | 51,5              | 0,6                  | 23,2            | 3 - 6                       |
| 6172 1301 | 14              | 51,5              | 0,6                  | 25,8            | 6 - 8                       |
| 6172 1302 | 14              | 51,5              | 0,6                  | 27,8            | 8 - 11                      |
| 6172 1303 | 14              | 51,5              | 0,6                  | 29              | 3 - 12                      |
| 6172 1304 | 14              | 51,5              | 0,6                  | 38              | 7 - 18                      |