


22261004	DATA SHEET	
Valid from: 02.02.2024	AB-C5-M12MA-(L*)PUR-SH	

Product description

- Sensor/actuator cable, 5-pol, PUR black
- Angled M12-plug on free conductor end
- Shielded



General characteristics

Number of pins	5
Ambient temperature	-25 °C to +90 °C (-13°F to 194°F) (plug / jack) -40 °C to +80 °C (-40°F to 176°F) (cable, fixed installation) -25 °C to +80 °C (-13°F to 176°F) (cable, movable installation)
Degree of protection	IP65 / IP67
Coding	A-standard
Tightening torque	0,4 Nm (M12-connector)
Plugging cycles	≥ 100

Variation

Article number	Description	Length [m]	Configuration
22261004	AB-C5-M12MA-2,0PUR-SH	2	angled
22261005	AB-C5-M12MA-5,0PUR-SH	5	angled
22262079	AB-C5-M12MA-6,5PUR-SH	6,5	angled

Additional note

Data sheet also valid for variant lengths. Other lengths on request.

Electrical properties


Rated voltage	48 V AC / 60 V DC
Rated current	4 A
Overvoltage category	II
Pollution degree	3

Mechanical properties

Plug

Inflammability class in accordance with UL 94	HB
Contact, material	CuSn
Contact carrier, material	TPU GF
Contact surface, material	Ni/Au
Knurl, material	Zinc diecasting, nickel-plated
Handle, material	TPU, flame retardant, self-extinguishing
Sealing, material	NBR

Creator: THLE3/PDP Released: IVSE1/PDP	Document: DB22261004EN Version: 03	Page 1 of 3
-------------------------------------------	---------------------------------------	-------------

22261004	DATA SHEET	
Valid from: 02.02.2024	AB-C5-M12MA-(L*)PUR-SH	


Line

Cable construction	5 x AWG22/42
Signal line, construction	42 x 0,1 mm
Conductor cross-section	0,34 mm ²
Conductor diameter including isolation	1,27 mm ± 0,02 mm
Cable outer diameter D	5,9 mm ± 0,15mm
Insulation color	brown, white, blue, black, grey
Sheath color	grey-black, RAL 7021
Shielding	Braid of tinned copper wires
Number of bending cycles	2.000.000
Bending radius	52 mm
Traveling distance	10 m
Traveling speed	3 m/s
Acceleration	10 m/s ²
Cable weight	43 kg/km
Outer coating, material	PUR
Wire insulation, material	PP
Insulation resistance	70 GΩ*km (at 20 °C)
Conductor resistance	≤ 78 Ω/km (at 20 °C)
Flame resistance	acc. to UL 758/1581 FT2 DIN EN 60332-2-2 (20 s)
Halogen-free	acc. to DIN VDE 0472 Part 815 EC 60754-1
Oil resistance	acc. to IEC 60811-404
Other resistances	resistant to hydrolysis and microbes limited UV resistance acc. to DIN EN ISO 4892-2-A good resistant to acids, lyes and solvents resistant to sea water abrasion resistant


Standards/Approvals

Product standard, M12 connector	IEC 61076-2-101
UL-Listed, E-File	E249137


Creator: THLE3/PDP Released: IVSE1/PDP	Document: DB22261004EN Version: 03	Page 2 of 3
-------------------------------------------	---------------------------------------	-------------

22261004	DATA SHEET	
Valid from: 02.02.2024	AB-C5-M12MA-(L*)PUR-SH	


Technical drawing

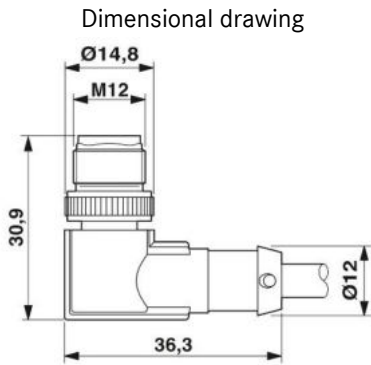


Plug M12 x 1, angled, shielded

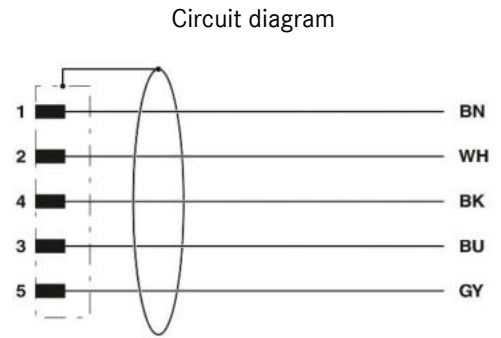

Pin assignment from M12-plug

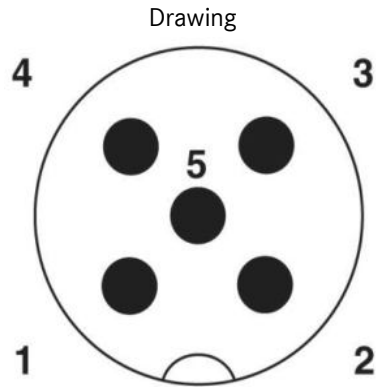

Pin assignment M12-plug, 5-pol, A-coding

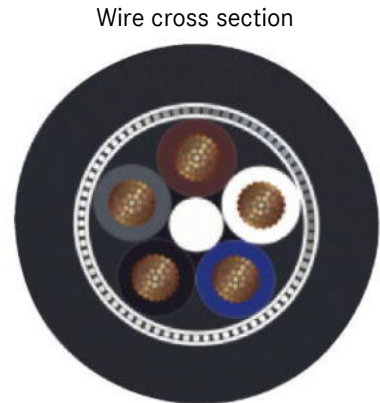

Application range

For increased mechanical load and rough operating conditions

Note

Photographs are not true to scale and do not represent detailed images of the respective products.

Creator: THLE3/PDP Released: IVSE1/PDP	Document: DB22261004EN Version: 03	Page 3 of 3
-------------------------------------------	---------------------------------------	-------------