


22260408	DATA SHEET	
Valid from: 21.12.2023	AB-C5-(L*)PUR-M12FA-3L	

Product description

- Sensor/actuator cable, 5-pol, PUR halogen-free, black
- Angled M12-jack on free conductor end
- 3 LEDs



General characteristics

Number of pins	5
Ambient temperature	-25 °C bis +90 °C (-13°F bis 194°F) (plug / jack) -40 °C bis +80 °C (-40°F bis 176°F) (cable, fixed installation) -25 °C bis +80 °C (-13°F bis 176°F) (cable, movable installation)
Degree of protection	IP65 / IP67 / IP68
Coding	A-standard
Tightening torque	0,4 Nm (M12-connector)
Plugging cycles	≥ 100

Variation

Article number	Description	Length [m]	Configuration
22260408	AB-C5-2,0PUR-M12FA-3L	2	angled
22260409	AB-C5-5,0PUR-M12FA-3L	5	angled
22260416	AB-C5-10,0PUR-M12FA-3L	10	angled
22260760	AB-C5-25,0PUR-M12FA-3L	25	angled
22261084	AB-C5-50,0PUR-M12FA-3L	50	angled

Additional note

Data sheet also valid for variant lengths. Other lengths on request.

Electrical properties


Rated voltage	24 V DC
Rated current	4 A
Overvoltage category	II
Pollution degree	3

Mechanical properties

Jack

Inflammability class in accordance with UL 94	HB
Contact, material	CuSn
Contact carrier, material	TPU GF
Contact surface, material	Ni/Au
Knurl, material	Zinc diecasting, nickel-plated
Handle, material	TPU, flame retardant, self-extinguishing
Sealing, material	NBR

Creator: THLE3/PDP Released: IVSE1/PDP	Document: DB22260408EN Version: 06	Page 1 of 3
---	---------------------------------------	-------------

22260408	DATA SHEET	
Valid from: 21.12.2023	AB-C5-(L*)PUR-M12FA-3L	


Line

Cable construction	5 x AWG22/42
Signal line, construction	42 x 0,1 mm
Conductor cross-section	0,34 mm ²
Conductor diameter including isolation	1,27 mm ± 0,02 mm
Cable outer diameter D	5,0 mm ± 0,15mm
Insulation color	brown, white, blue, black, green/yellow
Sheath color	grey-black, RAL 7021
Number of bending cycles	10.000.000
Bending radius	50 mm
Traveling distance	10 m
Traveling speed	3 m/s
Acceleration	10 m/s ²
Cable weight	33 kg/km
Outer coating, material	PUR
Wire insulation, material	PP
Insulation resistance	≥ 10 GΩ*km (bei 20 °C)
Conductor resistance	≤ 78 Ω/km (bei 20 °C)
Flame resistance	acc. to UL 758/1581 FT2 DIN EN 60332-2-2 (20 s)
Halogen-free	acc. to DIN VDE 0472 Part 815
Oil resistance	acc. to DIN EN 60811-2-1
Other resistances	resistant to hydrolysis and microbes good resistant to acids, lyes and solvents limited UV resistance acc. to DIN EN ISO 4892-2-A resistant to sea water

Standards/Approvals


Product standard, M12 connector	IEC 61076-2-101
UL-Listed, E-File	E249137

Creator: THLE3/PDP Released: IVSE1/PDP	Document: DB22260408EN Version: 06	Page 2 of 3
---	---------------------------------------	-------------

22260408	DATA SHEET	
Valid from: 21.12.2023	AB-C5-(L*)PUR-M12FA-3L	


Technical drawing

Dimensional drawing

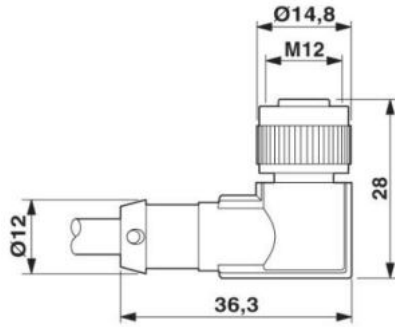


Jack M12 x 1, angled, with LED

Circuit diagram

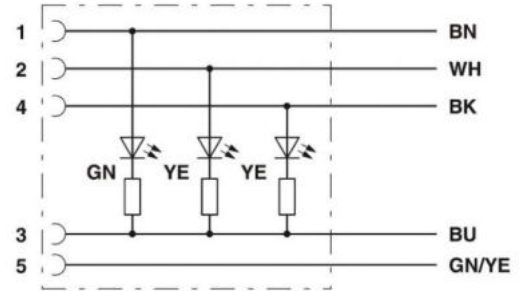


Pin assignment M12-jack, with LED

Drawing



Pin assignment M12-jack, 5-pol, A-coding

Wire cross section



Application range

For increased mechanical load and rough operating conditions

Note

Photographs are not true to scale and do not represent detailed images of the respective products.

Creator: THLE3/PDP Released: IVSE1/PDP	Document: DB22260408EN Version: 06	Page 3 of 3
---	---------------------------------------	-------------